


\*RoHS COMPLIANT



**BOURNS®**

## Features

- 15 kA, 8/20 μs surge capability
- Low clamping voltage under surge
- Bidirectional TVS
- Surface mount package
- Excellent performance over temperature
- UL Recognized 

## Applications


- High power DC bus protection

# PTVS15-xxxC-SH Series High Current TVS Diodes

### General Information

The PTVS15-xxxC-SH range of high current bidirectional TVS diodes is designed for use in high power DC bus clamping applications. These devices offer bidirectional port protection and are available with standoff voltage ratings of 58 V and 76 V.

The devices are RoHS\* compliant and UL Recognized. They also meet IEC 61000-4-5 8/20 μs current surge requirements.



### Agency Approval

Description	
UL	File Number: E313168

### Absolute Maximum Ratings (@ T<sub>A</sub> = 25 °C Unless Otherwise Noted)

Rating		Symbol	Value	Unit
Repetitive Standoff Voltage	PTVS15-058C-SH PTVS15-076C-SH	V <sub>WM</sub>	58 76	V
Peak Current Rating per 8/20 μs IEC 61000-4-5		I <sub>PPM</sub>	15	kA
Operating Junction Temperature Range		T <sub>J</sub>	-55 to +125	°C
Storage Temperature Range		T <sub>S</sub>	-55 to +150	°C

### Electrical Characteristics (@ T<sub>A</sub> = 25 °C Unless Otherwise Noted)

Parameter	Test Conditions		Min.	Typ.	Max.	Unit
I <sub>D</sub> Standby Current	V <sub>D</sub> = V <sub>WM</sub>				10	μA
V <sub>(BR)</sub> Breakdown Voltage	I <sub>BR</sub> = 10 mA	PTVS15-058C-SH PTVS15-076C-SH	64 85	66 92	70 95	V
V <sub>C</sub> Clamping Voltage (1)	I <sub>PP</sub> = 15 kA	PTVS15-058C-SH PTVS15-076C-SH			110 150	V
V <sub>(BR)</sub> Temperature Coefficient				0.1		%/°C
C Capacitance	F = 10 kHz, V <sub>d</sub> = 1 Vrms	PTVS15-058C-SH PTVS15-076C-SH		12 9		nF

(1) V<sub>C</sub> measured at the time which is coincident with the peak surge current.

**BOURNS®**

**Asia-Pacific:** Tel: +886-2 2562-4117 • Fax: +886-2 2562-4116

**EMEA:** Tel: +36 88 520 390 • Fax: +36 88 520 211

**The Americas:** Tel: +1-951 781-5500 • Fax: +1-951 781-5700

[www.bourns.com](http://www.bourns.com)

\*RoHS Directive 2002/95/EC Jan. 27, 2003 including annex and RoHS Recast 2011/65/EU June 8, 2011.

Specifications are subject to change without notice.


The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time. Users should verify actual device performance in their specific applications.

# PTVS15-xxxC-SH Series High Current TVS Diodes



## Product Dimensions

This is a Pb free product, with epoxy encapsulations meeting UL Class 94V-0. Ag plated leads meet solderability requirements of JESD22-B102. Package dimensions are shown below.

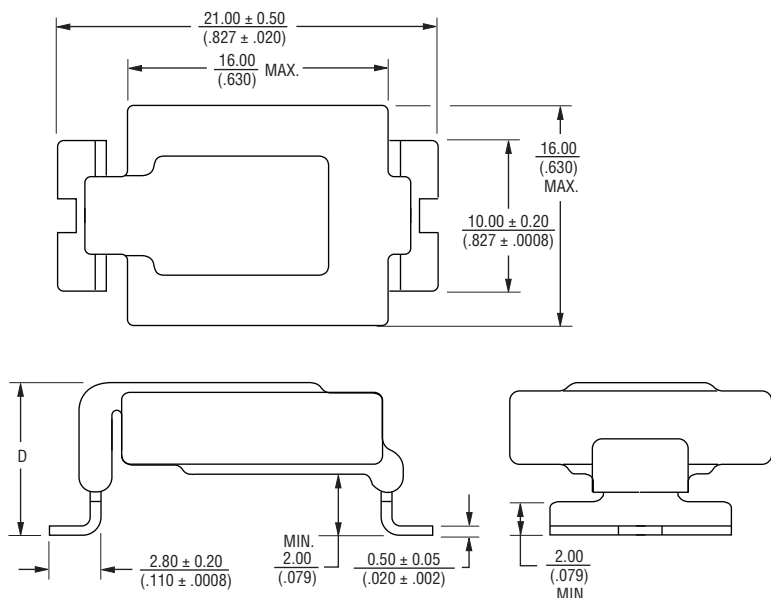


Device	Dimension D
PTVS15-058C-SH	$\frac{11.00}{(0.433)}$ Max.
PTVS15-076C-SH	$\frac{12.00}{(0.472)}$ Max.


DIMENSIONS:  $\frac{\text{MM}}{(\text{INCHES})}$

## Application

A typical application for Power TVS products includes DC power line protection.

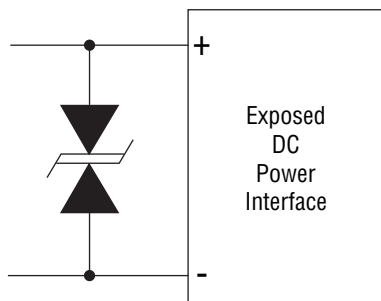

## Recommended Printed Wiring Land Pattern Dimensions

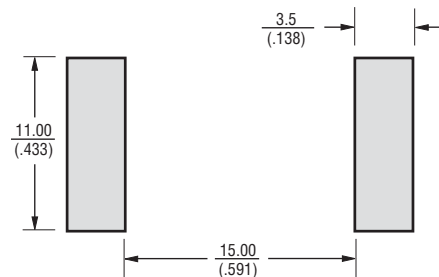

## Typical Part Marking

PTVS15-058C-SH ..... 15058  
 PTVS15-076C-SH ..... 15076

## How to Order

**PTVS 15 - xxx C - S H**

Series \_\_\_\_\_  
 PTVS = Power TVS High Current Diode

Peak Current Rating \_\_\_\_\_  
 15 = 15 kA

Repetitive Standoff Voltage \_\_\_\_\_  
 058 = 58 V  
 076 = 76 V

Suffix \_\_\_\_\_  
 C = Bidirectional Device

Package \_\_\_\_\_  
 S = Surface Mount

Temperature \_\_\_\_\_  
 H = High Temperature Series


Specifications are subject to change without notice. The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time. Users should verify actual device performance in their specific applications.

# PTVS15-xxxC-SH Series High Current TVS Diodes




## Performance Graphs


### V-I Characteristic

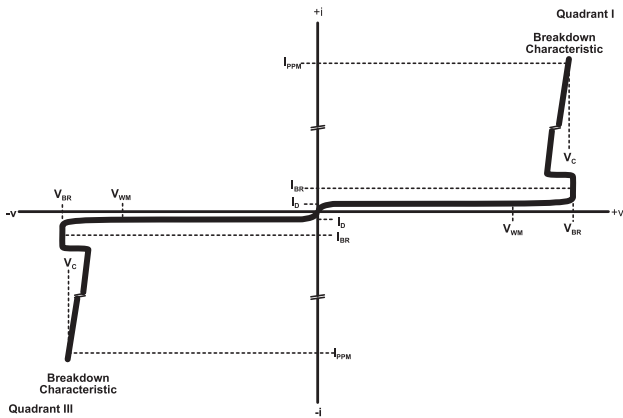

### Typical $V_{BR}$ vs. Junction Temperature

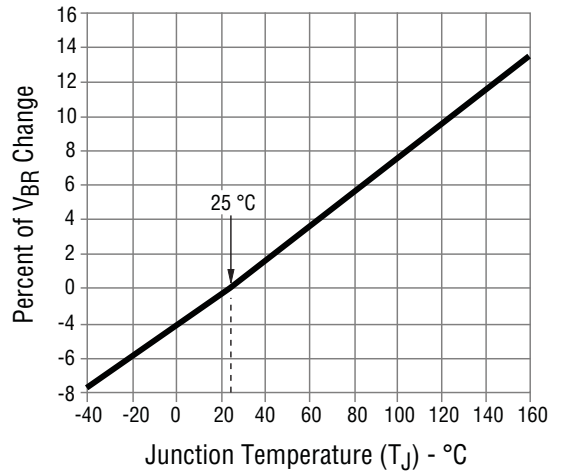


### Typical Surge Current Derating

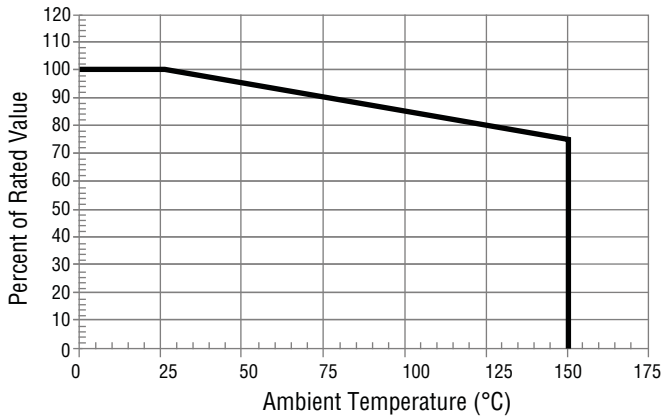

This graph shows the typical device surge current derating versus ambient temperature when subjected to the 8/20  $\mu$ s current waveform per the IEC 61000-4-5 specification. This device is not intended for continuous operation at temperatures above 125 °C.

### Current 8/20 $\mu$ s Waveform per IEC 61000-4-5

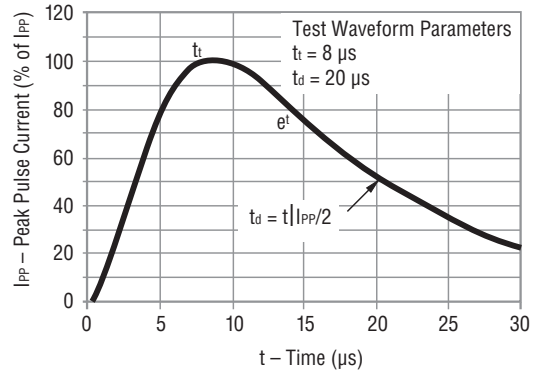

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [ESD Suppressors / TVS Diodes](#) category:*

*Click to view products by [Bourns](#) manufacturer:*

Other Similar products are found below :

[60KS200C](#) [D12V0H1U2WS-7](#) [D18V0L1B2LP-7B](#) [82356050220](#) [D5V0M5U6V-7](#) [NTE4902](#) [P4KE27CA](#) [P6KE11CA](#) [P6KE39CA-TP](#)  
[P6KE8.2A](#) [SA110CA](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#) [SMBJ8.0A](#) [SMLJ30CA-TP](#) [ESD101-B1-02ELS E6327](#) [ESD112-B1-02EL E6327](#)  
[ESD119B1W01005E6327XTSA1](#) [ESD5V0L1B02VH6327XTSA1](#) [ESD7451N2T5G](#) [19180-510](#) [CPDT-5V0USP-HF](#) [3.0SMCJ33CA-F](#)  
[3.0SMCJ36A-F](#) [HSPC16701B02TP](#) [D3V3Q1B2DLP3-7](#) [D55V0M1B2WS-7](#) [DESD5V0U1BL-7B](#) [DRTR5V0U4SL-7](#) [SCM1293A-04SO](#)  
[ESD200-B1-CSP0201 E6327](#) [ESD203-B1-02EL E6327](#) [SM12-7](#) [SMF8.0A-TP](#) [SMLJ45CA-TP](#) [CEN955 W/DATA](#) [82350120560](#)  
[82356240030](#) [VESD12A1A-HD1-GS08](#) [CPDUR5V0R-HF](#) [CPDUR24V-HF](#) [CPDQC5V0U-HF](#) [CPDQC5V0USP-HF](#) [CPDQC5V0-HF](#)  
[D1213A-01LP4-7B](#) [D1213A-02WL-7](#) [ESDLIN1524BJ-HQ](#) [5KP100A](#) [5KP15A](#)