


## FLRY

**FLRY-A** Automotive low voltage cable (FL) with reduced thickness of insulation (R) made of PVC (Y), with regularly stranded conductor (A)

**FLRY-B** Automotive low voltage cable (FL) with reduced thickness of insulation (R) made of PVC (Y), with irregularly stranded conductor (B)

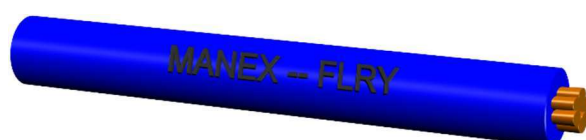

**Application** Single-conductor automotive cable designed for electric installations in vehicles.

### Technical data

**Conductor:** Cu-ETP1 (acc. to EN13602), multi wire, flexible (acc. to ISO 6722-1)  
**Insulation:** PVC, class B (acc. to ISO 6722-1)  
**Sheath:** Not applicable  
**Temperature range:** -40°C ÷ +105°C  
**Standards:** ISO 6722-1; DIN 72551-6; ECE-R 118  
 Cables conform to the requirements of REACH Regulation and RoHS Directive.

### Technical characteristics

#### FLRY-A

Number of conductors x Nominal cross-section mm <sup>2</sup>	Conductor structure		Resistance at 20°C mΩ/m	Insulation thickness mm	Sheath thickness mm	Outer diameter of cable		Approximate weight of cable kg/km
	Number of wires	Single wire diameter				(min.) mm	(max.) mm	
		(max.) mm						
1 x 0,13	7	0,16	136	0,25	--	0,95	1,05	2,1
1 x 0,22	7	0,21	84,8	0,25	--	1,10	1,20	3,1
1 x 0,35	7	0,27	54,4	0,25	--	1,20	1,30	4,3
1 x 0,50	19	0,19	37,1	0,28	--	1,40	1,60	5,8
1 x 0,75	19	0,24	24,7	0,30	--	1,70	1,90	8,6
1 x 1,00	19	0,27	18,5	0,30	--	1,90	2,10	11,1
1 x 1,50	19	0,33	12,7	0,30	--	2,20	2,40	15,6
1 x 2,00	19	0,38	9,42	0,35	--	2,50	2,80	21,0
1 x 2,50	19	0,41	7,6	0,35	--	2,70	3,00	25,3

## FLRY-B

Number of conductors x Nominal cross-section	Conductor structure		Resistance at 20°C	Insulation thickness	Sheath thickness	Outer diameter of cable		Approximate weight of cable
	Number of wires	Single wire diameter				(min.)	(max.)	
		mm <sup>2</sup>	(max.) mm	(max.) mΩ/m	(nom.) mm	(nom.) mm	mm	mm
1 x 0,35	12	0,21	54,4	0,25	--	1,20	1,40	4,3
1 x 0,50	16	0,21	37,1	0,28	--	1,40	1,60	5,8
1 x 0,75	24	0,21	24,7	0,30	--	1,70	1,90	8,7
1 x 1,00	32	0,21	18,5	0,30	--	1,90	2,10	11,2
1 x 1,50	30	0,26	12,7	0,30	--	2,20	2,40	15,9
1 x 2,00	28	0,31	9,42	0,35	--	2,50	2,80	21,3
1 x 2,50	50	0,26	7,6	0,35	--	2,70	3,00	26,4
1 x 3,00	44	0,31	6,15	0,40	--	3,10	3,40	33,5
1 x 4,00	56	0,31	4,71	0,40	--	3,40	3,70	41,5
1 x 5,00	65	0,33	3,94	0,40	--	3,90	4,20	52,3
1 x 6,00	84	0,31	3,14	0,40	--	4,00	4,30	61,6
1 x 8,00	112	0,31	2,38	0,40	--	4,60	5,00	82,4
1 x 10,00	80	0,41	1,82	0,60	--	5,30	6,00	109,9
1 x 16,00	126	0,41	1,16	0,65	--	6,40	7,20	161,5
1 x 25,00	196	0,41	0,743	0,65	--	7,90	8,70	257,6
1 x 35,00	276	0,41	0,527	0,80	--	9,40	10,40	355,2
1 x 40,00	308	0,41	0,473	0,90	--	10,00	11,10	387,8
1 x 50,00	400	0,41	0,368	0,90	--	11,00	12,20	495,1
1 x 70,00	555	0,41	0,259	1,00	--	13,00	14,40	698,8

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [BQ Cable manufacturer](#):*

Other Similar products are found below :

[DN1E0.65/0.25](#) [DNE1.35/0.25](#) [CAB-USBAB/3](#) [SCW-0.70/500](#) [FLCC-64/30](#) [DNE0.35/0.50](#) [DNE1.65/0.25](#) [DN1E1.15/0.50](#) [DN1E1.20/0.50](#)  
[DN1E1.60/0.25](#) [DN1E1.40/0.25](#) [DN1E1.70/0.25](#) [DNE0.95/0.50](#) [DNE1.25/0.25](#) [DNE1.25/0.50](#) [DNE1.35/0.50](#) [DNE1.75/0.25](#) [SCW-0.90/100](#)  
[SCW-0.90/250](#) [SCW-1.10/250](#) [CAB-DC3](#) [DN1E0.90/0.25](#) [DN1E1.10/0.50](#) [DNE0.25/0.50](#) [DNE1.45/0.50](#) [DNE1.85/0.25](#) [DN1E1.15/0.25](#)  
[DN1E0.90/0.50](#) [DNE1.85/0.50](#) [DN1E0.60/0.50](#) [DN1E0.70/0.25](#) [DN1E0.75/0.50](#) [DN2E0.30/0.25](#) [DN2E1.60/0.25](#) [DNE0.55/0.25](#)  
[DNE0.95/0.25](#) [TLY-SET0.22/10](#) [C-15WWHD/3](#) [CABLE-121](#) [DN1E0.15/0.50](#) [DN1E0.65/0.50](#) [DN1E1.60/0.50](#) [DN2E1.50/0.25](#)  
[DN2E1.70/0.25](#) [DNE0.45/0.25](#) [DNE0.55/0.50](#) [DNE0.85/0.25](#) [DNE1.45/0.25](#) [DNE1.55/0.25](#) [SCW-2.00/100](#)