


Tinned Copper Braided Hose

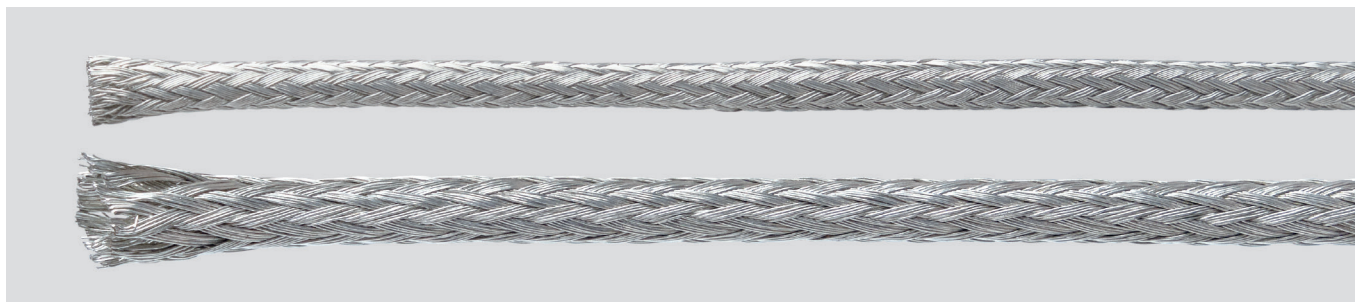

Tinned Copper Braided Hose

- optimal expandability
- very good screening effect (EMC)

Application:

- for wire screening
- earthing connections in control cabinets
- in construction of vehicles and ships
- in railway sector

Material

annealed tinned copper wire, soft

Technical Data

- temperature range: -75°C up to + 150°C
- single wire diameter: 0,15 to 0,30 mm
- tube-shaped braid made of tinned copper wires; its expandability and coverage can be set by changing the braiding angle

Note

- bare copper braided hoses are available on request

| Part no. | Type | Min. inner Ø mm | Max. inner Ø mm | Weight kg/km |
|----------|------|--------------------|--------------------|-----------------|
| 18050831 | PLc | 2 | 4 | 16,1 |
| 18050832 | PLc | 3 | 6 | 24,2 |
| 97397 | PLc | 5 | 12 | 60,0 |
| 18051569 | PLc | 6 | 10 | 32,2 |
| 97399 | PLc | 8 | 17 | 104,0 |
| 18050834 | PLc | 10 | 16 | 57,3 |
| 18050835 | PLc | 12 | 14 | 95,5 |
| 97400 | PLc | 12 | 22 | 98,0 |

| Part no. | Type | Min. inner Ø mm | Max. inner Ø mm | Weight kg/km |
|----------|------|--------------------|--------------------|-----------------|
| 18050836 | PLc | 16 | 24 | 128,9 |
| 97402 | PLc | 16 | 27 | 190,0 |
| 97403 | PLc | 20 | 35 | 204,0 |
| 18050837 | PLc | 24 | 30 | 193,3 |
| 18050838 | PLc | 30 | 40 | 322,2 |
| 18050839 | PLc | 30 | 50 | 483,2 |
| 18050840 | PLc | 40 | 55 | 386,6 |
| 18051567 | PLc | 60 | 75 | 483,2 |

Dimensions and specifications may be changed without prior notice.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Control Switches](#) category:

Click to view products by [BQ Cable](#) manufacturer:

Other Similar products are found below :

[80887-99](#) [80932-99](#) [86855-00](#) [88814-30](#) [1424293-1](#) [HW4S-2TC10](#) [89721-12](#) [89804-08](#) [SSN](#) [RL01801](#) [ASD2L20N-LVO](#) [50051857-17](#)
[50099156-001-05](#) [51.155R-15200](#) [50058920-26](#) [CP-FA51](#) [CP-FA49](#) [ACCU-SC/L-3000](#) [PP9M](#) [PP87G](#) [PP86GA](#) [PP71G](#) [PP70G](#) [PP6G](#)
[PP62G](#) [PP58BL](#) [PP56G](#) [PP86GB](#) [PP77GA](#) [PP76G](#) [PP4M](#) [PP47G](#) [PP46G](#) [PP41M](#) [PP40G](#) [PP32G](#) [RD-20](#) [PP23M](#) [PP12G](#) [PORTAPRO](#)
[POM-2708](#) [PNB-2005](#) [3057.0012](#) [CV-075](#) [CV-140SB](#) [CV-150](#) [CV-150S](#) [214X20XK](#) [CV-180](#) [CV-200MB](#)