

Thyristor Surge Suppressors (TSS) Data Sheet

Description

DO-214AA Thyristor solid state protection thyristor protect telecommunications equipment such as modems, line cards, fax machines, and other CPE.

P Series devices are used to enable equipment to meet various regulatory requirements including GR 1089, ITU K.20, K.21 and K.45, IEC 60950, UL 60950, and TIA-968 (formerly known as FCC Part 68).



Features

Compared to surge suppression using other technologies, P Series devices offer absolute surge protection regardless of the surge current available and the rate of applied voltage (dv/dt). P Series devices:

- Cannot be damaged by voltage
- Eliminate hysteresis and heat dissipation typically found with clamping devices
- Eliminate voltage overshoot caused by fast-rising transients
- Are non-degenerative
- Will not fatigue
- Have low capacitance, making them ideal for high-speed transmission equipment
- Meets MSL level 1, per J-STD-020
- Safety certification: UL: E244458

Electrical Parameters

Parameter	Definition
V_{DRM}	Peak Off-state Voltage – maximum voltage that can be applied while maintaining off state
V_S	Switching Voltage – maximum voltage prior to switching to on state
V_T	On-state Voltage – maximum voltage measured at rated on-state current
I_{DRM}	Leakage Current – maximum peak off-state current measured at V_{DRM}
I_S	Switching Current – maximum current required to switch to on state
I_T	On-state Current – maximum rated continuous on-state current
I_H	Holding Current – minimum current required to maintain on state
C_O	Off-state Capacitance – typical capacitance measured in off state
V_{PP}	Peak Pulse Voltage – maximum rated peak impulse voltage
I_{PP}	Peak Pulse Current – maximum rated peak impulse current

Electrical Characteristics

Part Number	V _{DRM} (V)	V _S (V)	V _T (V)	I _{DRM} (μA)	I _S (mA)	I _T (A)	I _H (mA)	C _O (pF)	V _{PP} 10/700μs (V)	I _{PP} 10/1000μs (A)	Marking
P0080SA	6	25	4	5	800	2.2	50	50	2000	45	P008A
P0080SB	6	25	4	5	800	2.2	50	70	4000	80	P008B
P0080SC	6	25	4	5	800	2.2	50	100	6000	100	P008C
P0300SA	25	40	4	5	800	2.2	50	70	2000	45	P03A
P0300SB	25	40	4	5	800	2.2	50	70	4000	80	P03B
P0300SC	25	40	4	5	800	2.2	50	100	6000	100	P03C
P0640SA	58	77	4	5	800	2.2	150	50	2000	45	P06A
P0640SB	58	77	4	5	800	2.2	150	60	4000	80	P06B
P0640SC	58	77	4	5	800	2.2	150	100	6000	100	P06C
P0720SA	65	88	4	5	800	2.2	150	50	2000	45	P07A
P0720SB	65	88	4	5	800	2.2	150	60	4000	80	P07B
P0720SC	65	88	4	5	800	2.2	150	100	6000	100	P07C
P0900SA	75	98	4	5	800	2.2	150	45	2000	45	P09A
P0900SB	75	98	4	5	800	2.2	150	55	4000	80	P09B
P0900SC	75	98	4	5	800	2.2	150	90	6000	100	P09C
P1100SA	90	130	4	5	800	2.2	150	45	2000	45	P11A
P1100SB	90	130	4	5	800	2.2	150	55	4000	80	P11B
P1100SC	90	130	4	5	800	2.2	150	90	6000	100	P11C
P1300SA	120	160	4	5	800	2.2	150	45	2000	45	P13A
P1300SB	120	160	4	5	800	2.2	150	55	4000	80	P13B
P1300SC	120	160	4	5	800	2.2	150	90	6000	100	P13C
P1500SA	140	180	4	5	800	2.2	150	40	2000	45	P15A
P1500SB	140	180	4	5	800	2.2	150	60	4000	80	P15B
P1500SC	140	180	4	5	800	2.2	150	85	6000	100	P15C
P1800SA	170	220	4	5	800	2.2	150	40	2000	45	P18A
P1800SB	170	220	4	5	800	2.2	150	60	4000	80	P18B
P1800SC	170	220	4	5	800	2.2	150	85	6000	100	P18C
P2300SA	190	260	4	5	800	2.2	150	35	2000	45	P23A
P2300SB	190	260	4	5	800	2.2	150	55	4000	80	P23B
P2300SC	190	260	4	5	800	2.2	150	80	6000	100	P23C


Electrical Characteristics

Part Number	V _{DRM} (V)	V _S (V)	V _T (V)	I _{DRM} (μA)	I _S (mA)	I _T (A)	I _H (mA)	C _O (pF)	V _{PP} 10/700μs (V)	I _{PP} 10/1000μs (A)	Marking
P2600SA	220	300	4	5	800	2.2	150	35	2000	45	P26A
P2600SB	220	300	4	5	800	2.2	150	50	4000	80	P26B
P2600SC	220	300	4	5	800	2.2	150	80	6000	100	P26C
P3100SA	275	350	4	5	800	2.2	150	30	2000	45	P31A
P3100SB	275	350	4	5	800	2.2	150	45	4000	80	P31B
P3100SC	275	350	4	5	800	2.2	150	65	6000	100	P31C
P3500SA	320	400	4	5	800	2.2	150	30	2000	45	P35A
P3500SB	320	400	4	5	800	2.2	150	40	4000	80	P35B
P3500SC	320	400	4	5	800	2.2	150	65	6000	100	P35C


Notes:

- All measurements are made at an ambient temperature of 25°C. I_{PP} applies to -40°C through +85°C temperature range.
- Off-state capacitance(C_O) is measured at 1 MHz with a 2V bias and is typical value.

Thermal Considerations

Package DO-214AA/SMB	Symbol	Parameter	Value	Unit
	T _J	Operating Junction Temperature	-40 to +150	°C
	T _S	Storage Temperature Range	-40 to +150	°C
	R _{θJA}	Junction to Ambient on printed circuit	90	°C/W

Part Number Code and Marking

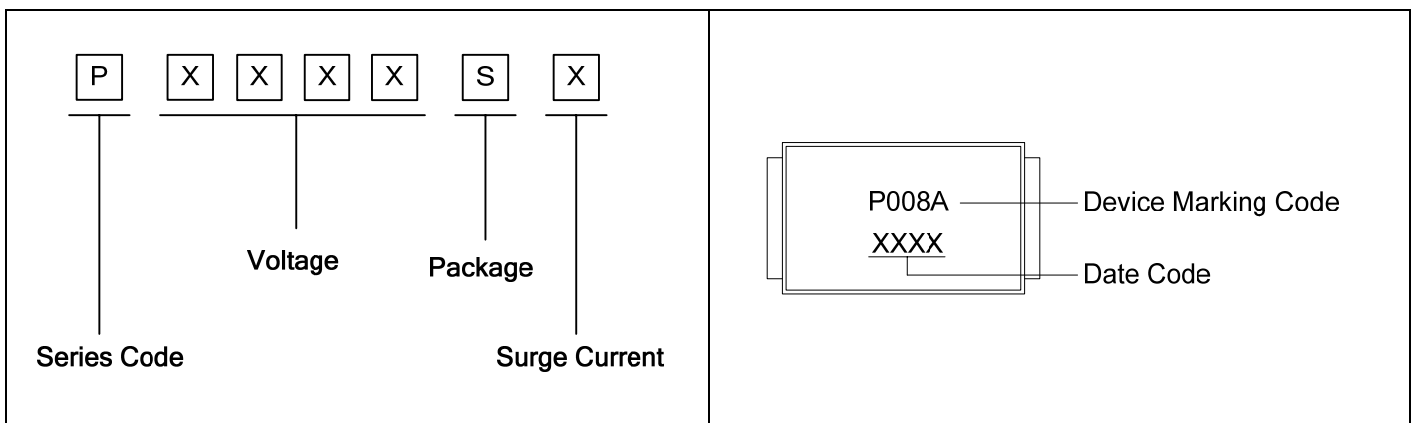

Characteristics Curves

Figure 1. V-I Characteristics

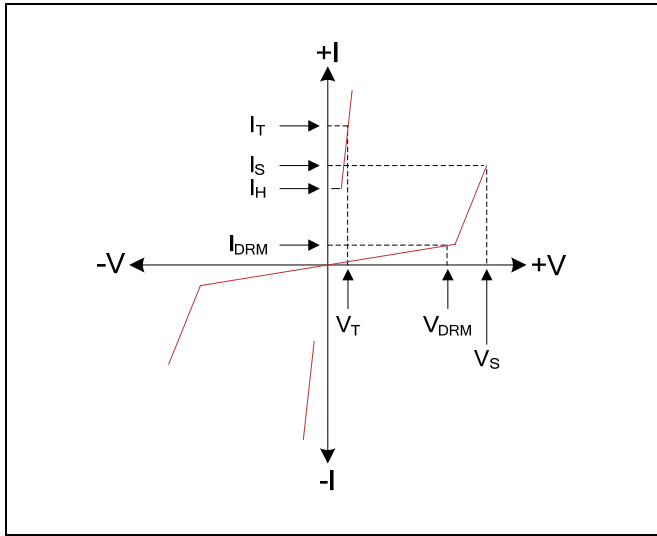


Figure 2. $t_r \times t_d$ Pulse Wave-form

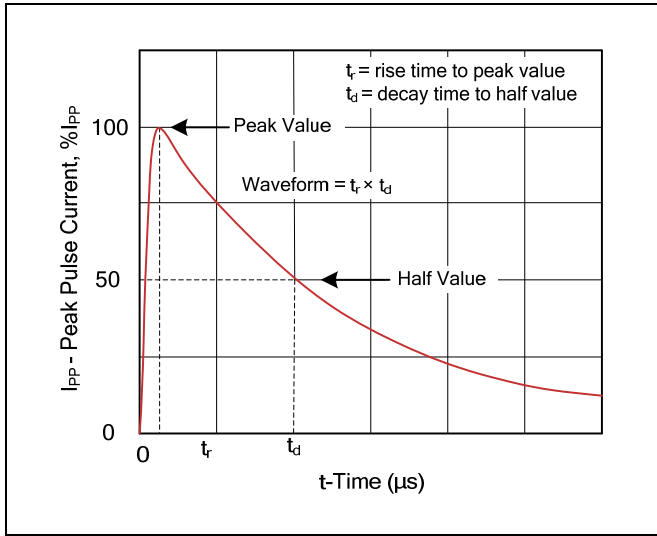


Figure 3. Normalized V_S Change versus Junction Temperature



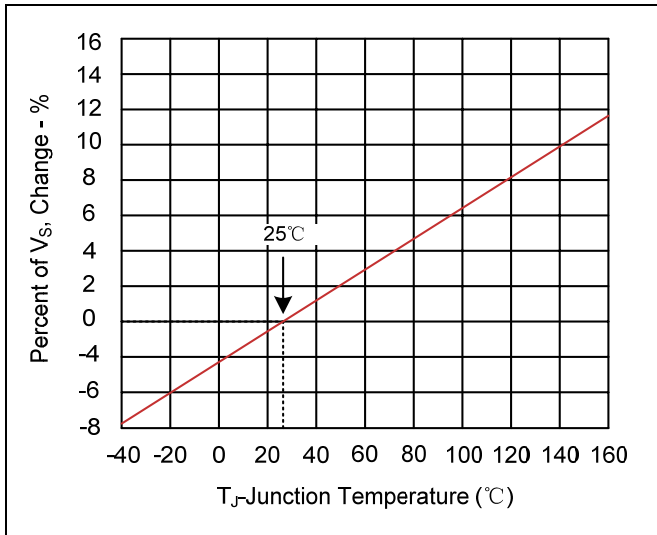


Figure 4. Normalized DC Holding Current versus Case Temperature

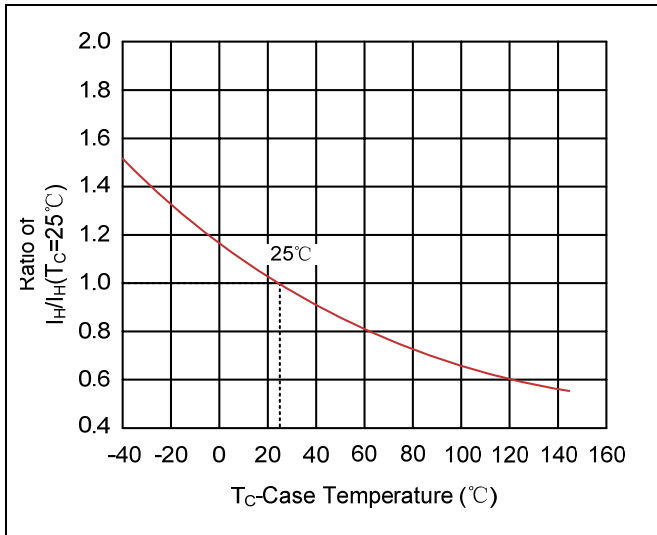

Recommended Soldering Conditions

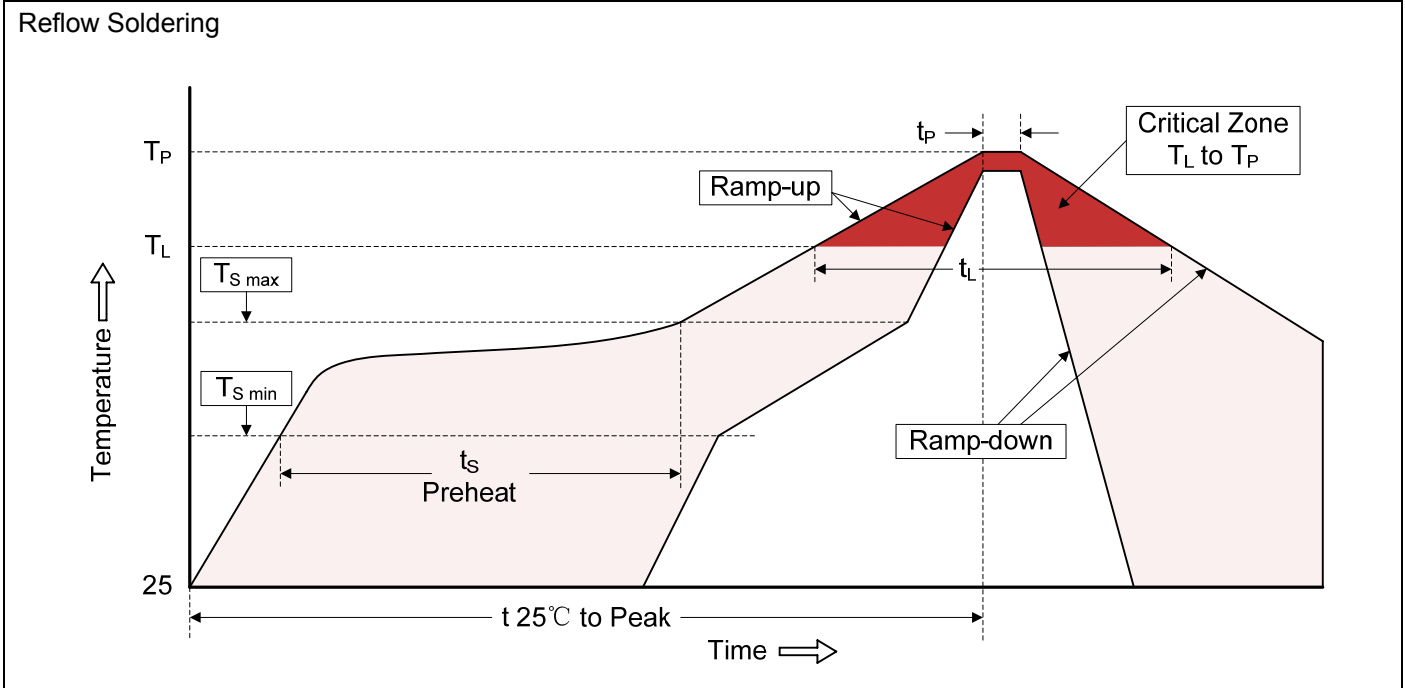

Recommended Conditions

Profile Feature	Pb-Free Assembly
Average ramp-up rate (T_L to T_P)	3°C/second max.
Preheat -Temperature Min ($T_{S\ min}$) -Temperature Max ($T_{S\ max}$) -Time (min to max) (t_s)	150°C 200°C 60-180 seconds
$T_{S\ max}$ to T_L -Ramp-up Rate	3°C/second max.
Time maintained above: -Temperature (T_L) -Time (t_L)	217°C 60-150 seconds
Peak Temperature (T_P)	260°C
Time within 5°C of actual Peak Temperature (t_p)	20-40 seconds
Ramp-down Rate	6°C/second max.
Time 25°C to Peak Temperature	8 minutes max.

Dimensions (SMB/DO-214AA)

Symbol	Millimeters		Inches	
	Min.	Max.	Min.	Max.
L	4.06	4.70	0.160	0.185
D	3.30	3.94	0.130	0.155
D1	1.90	2.20	0.075	0.086
T	5.21	5.59	0.205	0.220
T1	0.76	1.52	0.030	0.060
d	-	0.203	-	0.008
H	1.95	2.65	0.077	0.104

Packaging

Tape		Symbol	Dimension (mm)
		W	12.00±0.30
		P0	4.00±0.10
		P1	8.00±0.10
		P2	2.00±0.10
		D0	Φ1.55±0.05
		D1	Φ1.55±0.05
		E	1.75±0.10
		F	5.50±0.10
		A0	3.76±0.10
		B0	5.69±0.10
		K0	2.70±0.10
		T	0.25±0.10
		D2	Φ330.0±2.0
		D3	Φ13.5±0.5
		H	2.5±0.5
		W1	16.0±1.0
		Quantity: 2500PCS P0080SB: 3000PCS	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [brightking manufacturer](#):

Other Similar products are found below :

[1.5KE220A](#) [SMDJ33A](#) [SMDJ78A](#) [3RM230L-8](#) [LES08A05L05](#) [SMDJ6.5CA-AT](#) [5.0SMDJ17A](#) [5.0SMDJ33CA](#) [911KD14J](#) [5KP12A](#)
[5KP120A](#) [471KD25](#) [2RM075M-8](#) [112KD14](#) [2RK3000M-8](#) [5.0SMDJ100A](#) [2RH2000M-8](#) [820KD20J](#) [30KPA30A](#) [182KD20](#) [SMDJ43A](#)
[5.0SMDJ12A](#) [SMDJ18CA-AT](#) [BK16-600-SZ](#) [BK12005002-M](#) [1.5KE22A](#) [5.0SMDJ130CA](#) [5KP90CA](#) [1.5SMC24A](#) [15KPA30A](#) [181KD20](#)
[101KD20](#) [470KD20J](#) [5KP40CA](#) [15KPA75CA](#) [4532-471-LF](#) [15KPA30CA](#) [BK22002002-M](#) [SMDJ33CA-AT](#) [5.0SMDJ78CA](#) [3RL150M-5-S](#)
[15KPA24A](#) [SMDJ110CA](#) [SMDJ5.0CA-AT](#) [30KPA45CA](#) [15KPA58CA](#) [15KPA33A](#) [821KD25](#) [P0900SC](#) [P0720SC](#)