




- Sealed to IP68 when mated
- IP69K, Tested in accordance with DIN 40050/Part 9 IP6k9k
- 50Ω Impedance SMB connector
- Frequency range 0-4GHz
- Contact resistance
 - centre - 6mΩ max.
 - outer - 2.5mΩ max.
- Gold plated contacts
- Diameter over coupling ring 19mm
- Body moulding, Nylon UL94-V0 rated
- Two versions of Flex Connector
 - re-wireable
 - pre-wired - lengths 1m, 3m & 5m
- Panel connector
 - pre-wired - lengths 0.5m, 1m & 1.5m
- Cable accommodation (flex re-wireable), RG-174
- Cable type (pre-wired connectors), RG-174

Re- Wireable Flex Connector




PX0415/1

- Mates with Panel connector (PX0414)
- Re-wireable connector
- For RG-174 cable
- Supplied with SMB plug

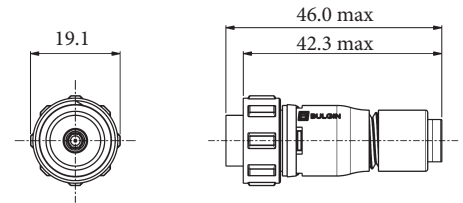


| Part no. | Description |
|----------|--|
| PX0415/1 | Re-wireable connector with SMB Plug - for RG-174 cable |

Pre- Wireable Flex Connector



PX0416/xMxx

- Mates with Panel connector (PX0414)
- Pre-wired
- Overmoulded construction
- Supplied with SMB plug terminated with RG-174 cable
- 1m, 3m & 5m cable lengths

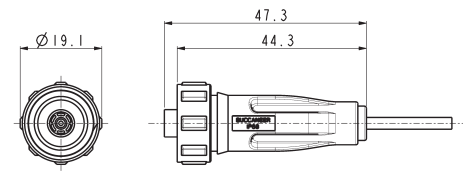


| Part no. | Description |
|-------------|---|
| PX0416/1M00 | Overmoulded connector with SMB plug - cable length 1m |
| PX0416/3M00 | Overmoulded connector with SMB plug - cable length 3m |
| PX0416/5M00 | Overmoulded connector with SMB plug - cable length 5m |

Panel Mounting Connector



PX0414/xMxx

- Mates with Flex connectors (PX0415, PX0416)
- Single hole fixing
- Supplied with SMB jack terminated with RG-174 cable
- U.FL cable version also available

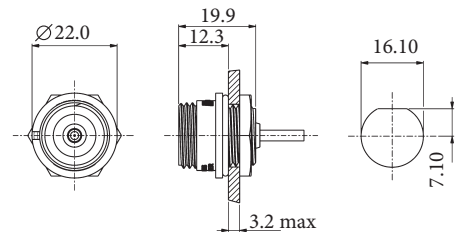

| Part no. | Description |
|-------------|---|
| PX0414/0M50 | Panel connector with SMB jack - cable length 0.5m |
| PX0414/1M00 | Panel connector with SMB jack - cable length 1m |
| PX0414/1M50 | Panel connector with SMB jack - cable length 1.5m |

Sealing Cap and Accessories



PX0480 PX0481 PX0485

- Sealing caps maintain IP rating when connectors are not in use

| Part no. | Description |
|----------|--|
| PX0480 | Sealing cap for PX0414 chassis connector |
| PX0481 | Sealing cap for PX0415 re-wireable flex connectors |
| PX0485 | Sealing cap for PX0416 overmoulded flex connector |
| 14319 | Hand crimp tool for SMB |



Electrical

| | |
|-----------------------|---------------|
| Impedance: | 50Ω |
| Frequency Range: | 0-4GHz |
| Contact Resistance: | |
| Centre: | 6mΩ (max.) |
| Outer: | 2.5mΩ (max.) |
| Insulator Resistance: | 1000MΩ (max.) |

Mechanical:

| | |
|-----------------------------|---|
| Sealing: | IP69K, Tested in accordance with DIN 40050/Part 9 IP6k9k |
| | IP68, EN60529:1992+A2:2013 (10m depth for 2 weeks) |
| Salt Mist | EN60068-2-52 Test Kb Salt Mist (Cyclic) Marine Severity Level 1 |
| Cable Acceptance: | RG-174 |
| Insertion/Withdrawal Force: | |
| Insertion Force: | 36N |
| Withdrawal Force: | 36N |
| Cable Retention Force: | 18N |
| Mating Cycles: | 500 |
| Operating Temperature: | -20°C to +80°C |

Material:

| | |
|-----------------------|---|
| PX0415/1 and PX0414 | |
| Body Mouldings: | Polyamide |
| Flammability Rating: | UL94V-0 |
| UV Resistance: | To EN 50021:1999 |
| PX0416 | |
| Body Mouldings: | PVC (black) |
| Flammability Rating: | UL94V-0 |
| O Rings: | Nitrile |
| Panel Sealing O Ring: | Nitrile |
| SMB Connector | |
| Body: | Brass to QQ-B-626, Gold Plated |
| Centre Contact: | |
| Plug: | Brass to QQ-B-626, Gold Plated |
| Jack: | Beryllium Copper to QQ-B-530, Gold Plated |
| Insulator: | Teflon |
| Crimp Ferrules: | Annealed Copper |
| RoHS | Compliant |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Crimpers](#) category:

Click to view products by [Bulgin](#) manufacturer:

Other Similar products are found below :

[576771-1](#) [576788-2](#) [576788-3](#) [010-0041](#) [010-0055](#) [010-0096](#) [604228-1](#) [606718-1](#) [M225202-37](#) [CT150-2-D02](#) [CT150-6-RH07](#) [M322](#)
[63484-3701](#) [63800-0140](#) [63800-8355](#) [63811-3275](#) [63811-3376](#) [63811-6375](#) [63811-6475](#) [63811-7875](#) [63811-8875](#) [63819-0475](#) [63819-1177](#)
[63819-1875](#) [63819-4375](#) [63819-4475](#) [63823-3475](#) [63823-5175](#) [63823-6375](#) [63823-8375](#) [63827-5375](#) [64001-0975](#) [64001-2175](#) [64001-4175](#)
[662903-2](#) [679513-1](#) [690141-6](#) [690142-4](#) [690602-6](#) [D38999/20WA98JB-LC](#) [7-22278-0](#) [7-22280-5](#) [7-240641-1](#) [7-240641-3](#) [762637-1](#)
[808714-1](#) [8-1633117-3](#) [91362-1](#) [995-0001-187](#) [999-50-020083](#)