
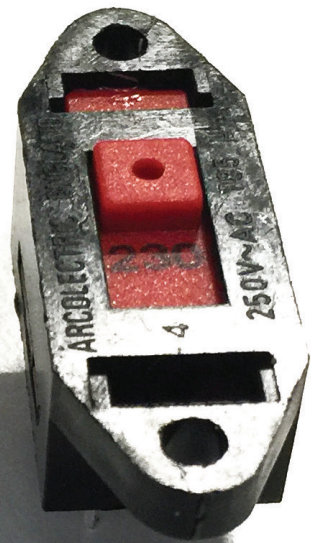



With up to 5 switching positions as well as multiple terminal, circuit and slider options, Bulgin's board mounted power slide switches can be configured to suit your needs. We also offer a wide range of voltage selector types that can be either snapped into a panel or flange mounted.

- Ratings up to 16A, 250V ac
- PCB and solder terminals
- Voltage Selector Models
- Snap in and flange mounting
- 2, 3, 4 and 5 position
- Choice of circuits
- Choice of actuators

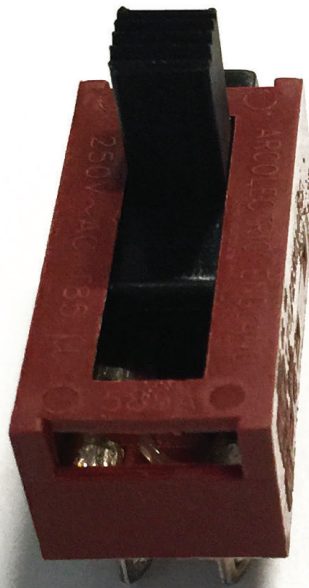

2000 Slide Switches - up to 5 position

10A 250Vac



Key Features

- Slide switches
- Ratings up to 16A, 250V ac
- PCB and solder terminals
- 2, 3, 4 and 5 position
- Choice of circuits
- Choice of actuators

Approvals and specifications

- ☑ 10A 250Vac T85
6(3)A 250Vac T85
 - ☑ UL CSA 16A 250Vac Non Inductive
UL CSA 4A 300Vac
UL 65°C, file no. E45221, CSA file no. LR10990
- μ contact gap
Please specify: Standard action (SP116) or Light action (SP118).
2000 series lubrication is inorganic and does not degrade plastics.

Terminal	Series	Position	Circuit	Slider
<p>K</p> <p>2.8 x 0.8</p> <p>R</p> <p>2.8 x 0.8</p> <p>T</p> <p>Solder</p> <p>X</p> <p>PCB 0.8 Sq.</p> <p>Y</p> <p>PCB 0.8 Sq.</p> <p>For mounting stability switches have extra "support" terminals</p> <p>* Nominal - Dimension varies with body type. For exact figure call sales</p>	<p>2</p>	<p>2</p> <p>Switching positions</p>	<p>10</p> <p>20</p> <p>30</p> <p>40</p>	<p>0</p> <p>1</p> <p>2</p> <p>3</p> <p>4</p> <p>5</p>
		<p>3</p> <p>Switching positions</p>	<p>10</p> <p>20</p> <p>30</p> <p>40</p>	<p>6</p> <p>7</p> <p>9</p> <p>A</p> <p>B</p> <p>C</p>
		<p>4</p> <p>Switching positions</p>	<p>10</p> <p>20</p> <p>30</p> <p>40</p>	<p>D</p> <p>E</p> <p>G</p> <p>H</p> <p>J</p> <p>K</p>
		<p>5</p> <p>Switching positions</p>	<p>10</p> <p>20</p> <p>30</p> <p>40</p>	<p>L</p> <p>N</p> <p>P</p> <p>R</p> <p>S</p> <p>T</p>

Examples



X22205C ---



T2220EC ---



T23206A ---





















T24306A ---



T25302A ---




T25100A ---

Body		Options	Dimensions		
<p>C 2 positions</p> 	<p>H 2 positions</p> 	<p>Colour Call sales for custom colours. A full range is available for large orders.</p> <p>Legend printing A wide range is available. For all options call sales</p>	<p>C 2 positions</p> 	<p>H 2 positions</p> 	<p>Cut-out / PCB Matrix</p> 
<p>A 3 positions</p> 	<p>H 3 positions</p> 		<p>A 3 positions</p> 	<p>H 3 positions</p> 	<p>Cut-out / PCB Matrix</p> 
<p>A 4 positions</p> 	<p>H 4 positions</p> 		<p>A 4 positions</p> 	<p>H 4 positions</p> 	<p>Cut-out / PCB Matrix</p> 
<p>A 5 positions</p> 			<p>A 5 positions</p> 		<p>Cut-out / PCB Matrix</p> 

2000 Slide Switches - Snap fit and panel mount

10A 250Vac



115/230 is preferred legend

Key Features

- 2 way 'voltage selector'
- Ratings up to 16A, 250V ac
- Snap fit and panel mount
- PCB & solder terminals
- 2 and 3 position
- Choice of circuits
- Choice of actuators

Approvals and specifications

10A 250Vac T85
6(3)A 250Vac T85

UL CSA 16A 250Vac Non Inductive
UL CSA 4A 300Vac
UL 65°C, file no. E45221, CSA file no. LR10990

μ contact gap

Please specify: Standard action (SP116) or Light action (SP118).

2000 series lubrication is inorganic and does not degrade plastics.

Terminal	Series	Position	Circuit	Slider	
K 2.8 x 0.8	2	2 Switching positions	10 	0 6 2 3 4 	
			20 		7 8
			30 		9 A
			40 		S
R 2.8 x 0.8	2	2 Switching positions	10 	C D E H 	
			20 		M N
			30 		P
			40 		K R
T Solder	2	2 Switching positions	10 	L 5 	
			20 		T
			30 		
			40 		
X PCB 0.8 Sq. For mounting stability switches have extra "support" terminals * Nominal - Dimension varies with body type. For exact figure call sales	3	3 Switching positions	10 		
			20 		
			30 		
			40 		

Examples



T22208E ---



T22308E ---



T2230MF ---



T22205B ---



T22305B ---



T23204B ---

Body


B

With mounting holes





E

Snap fit



F

Snap fit
(single contact ON OFF only)




Options

Colour


Call sales for custom colours.
A full range is available for large orders.
Standard body colour is black.

Dimensions



2 Pos B



3 Pos B





2 Pos E



Panel thickness	Dim. Y
0.8-1.2	29.75/29.85
1.63	30.15/30.25
2.0	30.35/30.45
2.5	30.55/30.65

2 Pos F



Panel thickness	Dim. Y
0.8-1.2	29.75/29.85
1.63	30.15/30.25
2.0	30.35/30.45
2.5	30.55/30.65

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Slide Switches](#) category:

Click to view products by [Bulgin](#) manufacturer:

Other Similar products are found below :

[6-1437581-1](#) [M43R](#) [MHS123K15D](#) [MHS133K](#) [MMD](#) [MSS12A](#) [EPS1PC1](#) [K232CB](#) [25139NLDB](#) [25449NAH](#) [1825078-1](#) [1825080-4](#)
[1825269-1](#) [1825270-2](#) [T2215BEN506](#) [GH46P000001](#) [GH49P010001](#) [25339NA](#) [25436NLDH](#) [M42A](#) [TG36P000000](#) [AYZ0202AG](#)
[L203091MS02Q](#) [4-1437581-7](#) [X2225CR-437W](#) [48BFSP3M2QT](#) [1101M1S3ZB8E2](#) [1-1437581-1](#) [EG1218REDACTUATOR](#) [MSS2225G04](#)
[TG39W000000](#) [1825075-1](#) [MSS42G](#) [T105S1CWZBE](#) [SLB124145](#) [SLB1280R5](#) [SLB1340R45](#) [25136NLDB](#) [TG39W000050](#) [4021.4621](#)
[25149NAH](#) [TG36Y000050](#) [NK236X693](#) [GE36P000001](#) [46204LRX](#) [EPS1PC2](#) [1977143-4](#) [1977144-4](#) [1977145-4](#) [HASS0194](#)