

With a rugged metal housing and environmental protection rating of IP67 when mated, Bulgin's robust M16 circular DIN connector range is an ideal solution for ensuring that power and signal connections are not compromised in harsh environments and industrial applications.



## Key features:

- Screw locking compliant with DIN EN 61076-2-106
- IP67 degree of protection
- Robust metal connector
- Excellent EMI shielding
- Contact variants from 3 - 12

**M16 Series coding options:**  
(Full Contact Diagrams Page 179)




A-Coding

M16 Inline Body Male



PXMBNI16FIM

- 3, 4, 5, 6, 8 & 12 Contacts
- Solder termination
- Metal Inline Body
- Mates with Flex Body and panel mount connectors

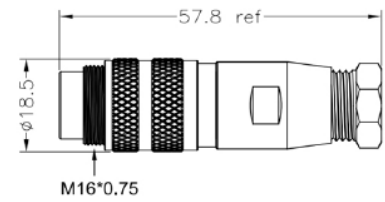


Part Number	Contacts	Code	Termination
PXMBNI16FIM03ASC	03	A	Solder Terminal
PXMBNI16FIM04ASC	04	A	Solder Terminal
PXMBNI16FIM05ASC	05	A	Solder Terminal
PXMBNI16FIM06ASC	06	A	Solder Terminal
PXMBNI16FIM08ASC	08	A	Solder Terminal
PXMBNI16FIM12ASC	12	A	Solder Terminal

M16 Flex Body Female



PXMBNI16FBF

- 3, 4, 5, 6, 8 & 12 Contacts
- Solder termination
- Metal Flex Body
- Mates with Inline Body and panel mount connectors

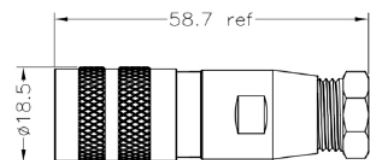


Part Number	Contacts	Code	Termination
PXMBNI16FBF03ASC	03	A	Solder Terminal
PXMBNI16FBF04ASC	04	A	Solder Terminal
PXMBNI16FBF05ASC	05	A	Solder Terminal
PXMBNI16FBF06ASC	06	A	Solder Terminal
PXMBNI16FBF08ASC	08	A	Solder Terminal
PXMBNI16FBF12ASC	12	A	Solder Terminal

M16 Rear Panel Mounting Male



PXMBNI16RPM

- 3, 4, 5, 6, 8 & 12 Contacts
- Solder termination
- Mates with Flex body connectors




Part Number	Contacts	Code	Termination
PXMBNI16RPM03ASC	03	A	Solder Terminal
PXMBNI16RPM04ASC	04	A	Solder Terminal
PXMBNI16RPM05ASC	05	A	Solder Terminal
PXMBNI16RPM06ASC	06	A	Solder Terminal
PXMBNI16RPM08ASC	08	A	Solder Terminal
PXMBNI16RPM12ASC	12	A	Solder Terminal

M16 Rear Panel Mounting Female



PXMBNI16RPF

- 3, 4, 5, 6, 8 & 12 Contacts
- Solder termination
- Mates with Inline Body connectors

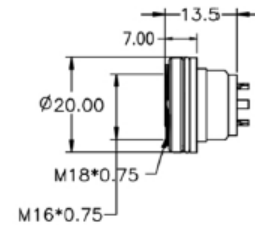

Part Number	Contacts	Code	Termination
PXMBNI16RPF03ASC	03	A	Solder Terminal
PXMBNI16RPF04ASC	04	A	Solder Terminal
PXMBNI16RPF05ASC	05	A	Solder Terminal
PXMBNI16RPF06ASC	06	A	Solder Terminal
PXMBNI16RPF08ASC	08	A	Solder Terminal
PXMBNI16RPF12ASC	12	A	Solder Terminal

**Electrical**

No. Contacts:	3	4	5	6	8	12
Current Rating:	7A	7A	6A	5A	5A	3A
Voltage Rating (ac/dc) :	250V	250V	250V	125V	60V	60V
Contact Resistance:	<5mΩ 3, 4, 5, 6 and 8 Contacts <3mΩ 12 Contacts					
Insulation Resistance:	>100 <sup>3</sup> MΩ					
AC Breakdown Voltage:						
3 Contacts						2.0KV
4 Contacts						2.0KV
5 Contacts						2.0KV
6 Contacts						1.5KV
8 Contacts						1.5KV
12 Contacts						1.5KV
Operating Temp Range:	-25°C to 80°C					

**Mechanical:**

Locking Mechanism:	Screw coupling
Sealing:	IP67
Contact Accomodation:	
3, 4, 5, 6 and 8 Contacts	20AWG
12 Contacts	24 AWG
Cable Acceptance:	5.0 - 7.5mm Dia
Contacts:	Terminations:
	Solder
Mechanical Operation:	500 mating cycles
Diameter over coupling ring:	18.5mm

**Panel Mount:**

Body Material:	Nickel Plated Brass
Coupling Nut Material:	Nickel Plated Brass
Colour:	Grey
Plug Contacts Material:	Brass, Gold plating
Socket Contacts Material:	Phosphor Bronze, Gold plating
O Rings & Gaskets Materials:	Viton
RoHS:	Compliant


**Flex & Inline Connectors:**

Body Material:	Nickel Plated Brass
Coupling Nut Material:	Nickel Plated Brass
Colour:	Grey
Plug Contacts Material:	Brass, Gold plating
Socket Contacts Material:	Phosphor Bronze, Gold plating
O Rings & Gaskets Materials:	Viton
RoHS:	Compliant


XXX	XXX	XX	XX	X	XX	X	XX	XXX
Series	Material	Series Size	Body Style	Orientation	Contacts	Code	Termination	Mounting / Gland Nut Thread
PXM	BNI = Brass Nickel	16	FB = Flex Body FI = Inline Body RP = Rear Panel Mounting	M = Male F = Female	03 04 05 06 08 12	A	SC = Solder	PG9 M16

**Contact Diagrams (Front View 'A' Code):**


XXXXXXXXXXM03XXXXXX  
XXXXXXXXXXF03XXXXXX

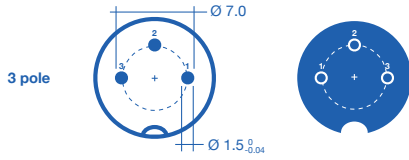


XXXXXXXXXXM04XXXXXX  
XXXXXXXXXXF04XXXXXX

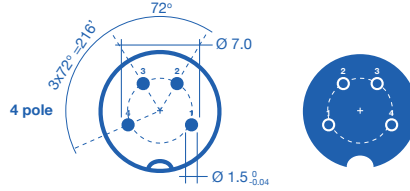


XXXXXXXXXXM05XXXXXX  
XXXXXXXXXXF05XXXXXX

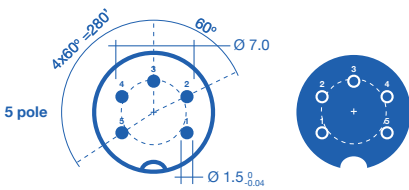


XXXXXXXXXXM06XXXXXX  
XXXXXXXXXXF06XXXXXX

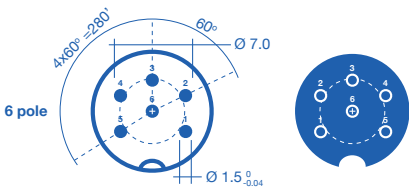

XXXXXXXXXXM08XXXXXX  
XXXXXXXXXXF08XXXXXX

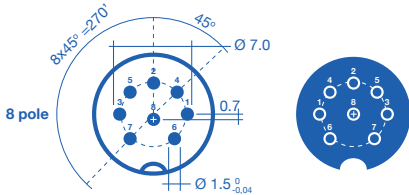

XXXXXXXXXXM12XXXXXX  
XXXXXXXXXXF12XXXXXX

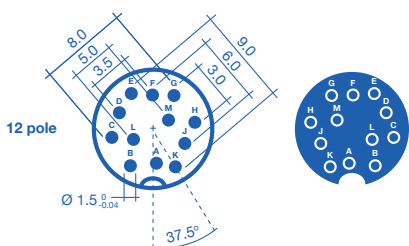

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Circular Metric Connectors](#) category:*

*Click to view products by [Bulgin](#) manufacturer:*

Other Similar products are found below :

[600X518037X](#) [6STD15PCR99B70A](#) [8R4000A16M020](#) [8R5000A16M005](#) [1200910002](#) [1203580030](#) [1200910008](#) [1200910011](#) [1300140094](#)  
[130203-0054](#) [1300140026](#) [1300150099](#) [RF-12S1N8A90DU](#) [1-3637-600-5205](#) [1612618](#) [21036836414](#) [8R4006A16M010](#) [8R5006A18A120](#)  
[1604232](#) [1R3006A20M005](#) [RF-12P1N8A80DU](#) [RF-12P1N8A90DU](#) [41-40011](#) [42-01015](#) [4-22279-4](#) [4-22281-1](#) [4-22284-9](#) [43-01088](#) [43-](#)  
[01203](#) [41-40013](#) [42-00008](#) [43-00343](#) [43-01032](#) [43-01162](#) [43-10000](#) [600X518050X](#) [SACC-DSI-FS-5P-PG9-L180 SC](#) [8R5006A16M020](#)  
[8R5006A16M005](#) [8R4000A16M010](#) [6-22279-3](#) [1605332](#) [N03FA03144](#) [1300140077](#) [43-01338](#) [XS2RD4265](#) [RSC 4/9](#) [XS2R-D426-1](#)  
[XS8A-0441](#) [859RD04-103R004](#)