




BB400™

Solderless Plug-in BreadBoard
with 400 tie-points and 4 power rails.

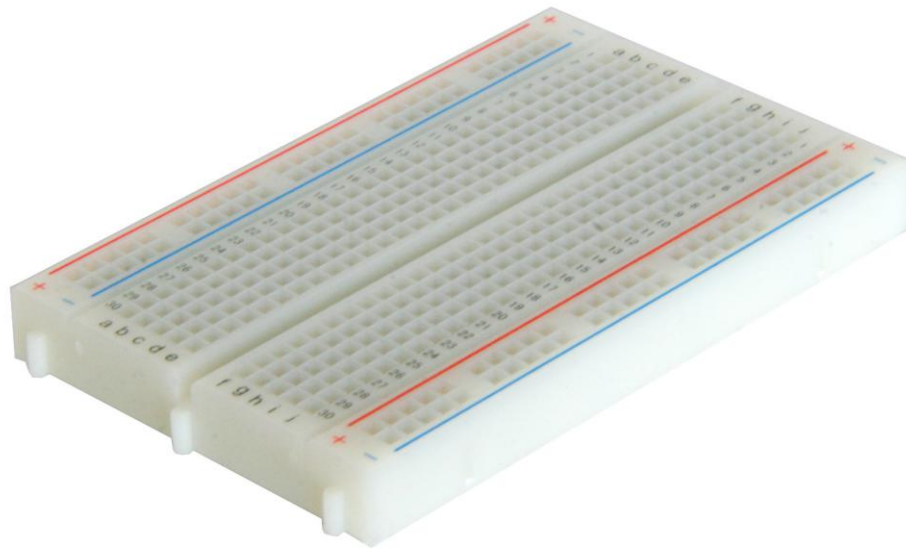

AVAILABLE STYLES:

WHITE


PART#: BB400

TRANSPARENT

PART#: BB400T

BB400™ Features:

- 400 total tie points - a 300 tie-point IC circuit area and two 50 tie-point distribution strips providing four power rails.
- ABS plastic body with black printed legend and color legend on distribution strips.
- Phosphor bronze contacts with plated nickel finish rated for 50,000 insertions.
- 21 to 26 AWG insertion wire size (0.016 - 0.028" / 0.4 - 0.7mm diameter).
- Rated at 36 Volts, 2 Amps.
- Peelable adhesive tape backing provided for attaching to a surface.




BB400™ Details:

BreadBoard-400 is a solderless (plug-in) breadboard with 400 connection tie-points (i.e. 400 wire insertion holes). It has 4 power rails. Solderless breadboards are great for building and testing new circuits because parts can be easily inserted and removed. They are completely re-usable.


The BB400 has a 300 tie-point IC-circuit area plus four 25 tie-point power rails. The housing is made of white ABS plastic, with a printed legend giving numbers and letters for columns and rows. The internal contacts are phosphor bronze with a plated nickel finish. A peelable adhesive tape backing is provided for attaching it to a surface. BPS BreadBoards are Lead-Free and RoHS Compliant.

Finished projects can be moved to a SB400 or SB404 Solderable PC BreadBoard to make them permanent.

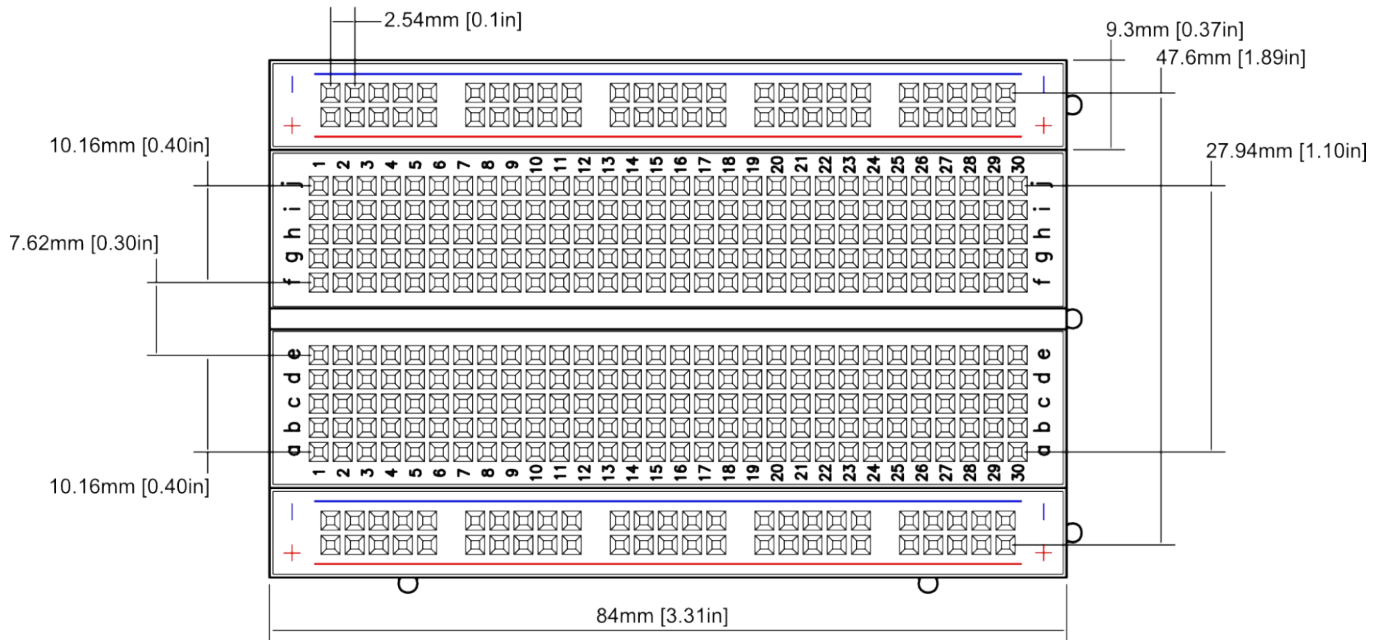


BULK BREADBOARDS AVAILABLE IN CASES OF 300
BB400 White Part #: BB400x300
BB400 Transparent Part #: BB400Tx300

Related Products:



SB400 Solderable
PC BreadBoard



SB404 Solderable
PC BreadBoard



BB300 BreadBoard



ZipWire™

BB400™ Specifications:

Body Material: ABS Plastic (White or Transparent) with color printed legend
ABS Heat Distortion Temp is 84 °C / 183 °F

Hole Style: Square Wire Holes
Hole Pitch: 0.1" / 2.54mm


Spring Clip Contact: Phosphor Bronze with Plated Nickel Finish
Contact Life: 50,000 insertions
Rating: 36 Volts, 2 Amps

Insertion Wire Size: 21 to 26 AWG wire, or 0.025" square post headers
0.016 - 0.028" / 0.4 - 0.7mm diameter

Backing: Peel-able adhesive tape for attaching to a surface
Metal back plate (0.031" / 0.8mm thickness)

Internal Connections: 60 vertical columns in the circuit area and 4 horizontal "rails" as distribution strips for power and ground

Note: A distribution strip can be used to carry a signal if it is not needed for power or ground.

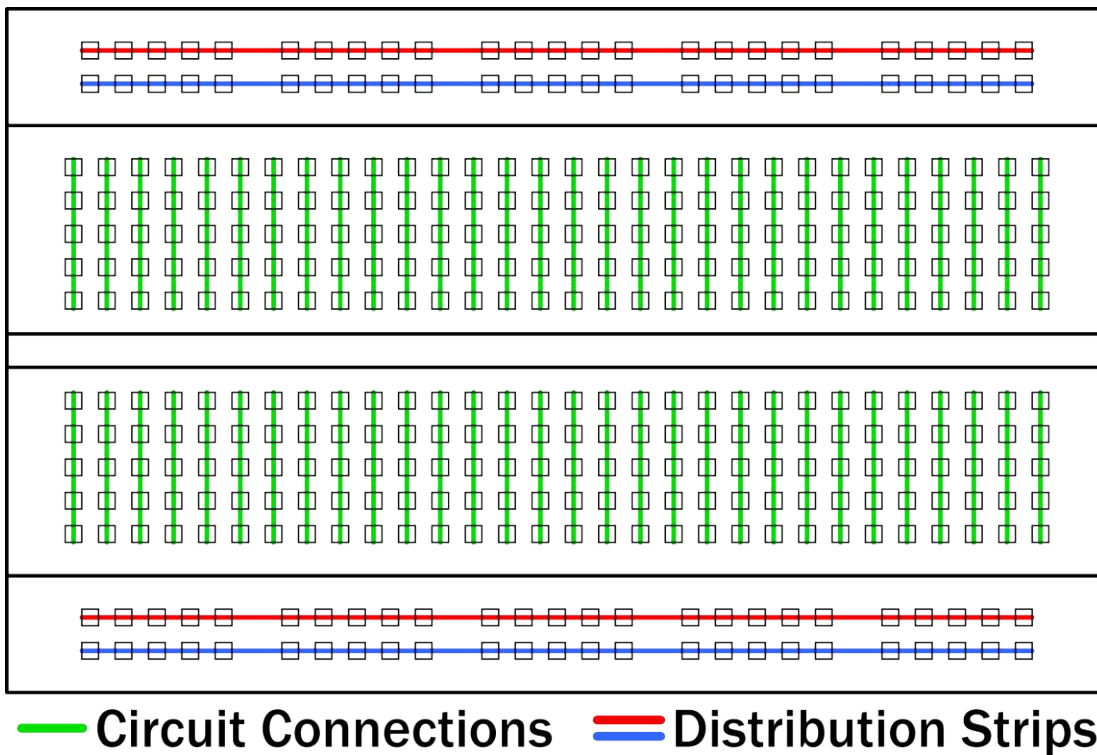

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for PCBs & Breadboards category:

Click to view products by [BusBoard Prototype manufacturer](#):

Other Similar products are found below :

[8004](#) [8007](#) [8016](#) [8017](#) [8028](#) [8029](#) [1268-12](#) [1268-10](#) [1320833-1](#) [923252-R](#) [3410](#) [3396](#) [15107](#) [8006](#) [8015](#) [8018](#) [8019](#) [8020](#) [1268-19](#) [1268-20](#) [8026](#) [1239-19](#) [SBBTH1520-1](#) [SBBTH1506-1](#) [SBBTH4080-1](#) [SBBTH3030-1](#) [SBBTH1512-1](#) [SBBTH1508-1](#) [SBBSM2120-1](#) [SBB2808-1](#) [SBB2805-1](#) [SBB1605-1](#) [SBB1602-1](#) [SBB1005-1](#) [SBB1002-1](#) [3426](#) [32P15WE](#) [ZAS1X206203XRPU160](#) [SBBTH3040-1](#) [SBB0004-1](#) [SBB830-QTY10](#) [7115](#) [923749-I](#) [RE013-LF](#) [RE014-LF](#) [RE015-LF](#) [RE1210-LF](#) [RE200-C3](#) [RE210-S1](#) [RE317-HP](#)