

ProtoBoard-2H-3U – 2-hole segmented stripboard



Prototype circuit board for general purpose analog and digital use.

Features


- *ProtoBoard* saves time! ProtoBoard-2H has a general purpose stripboard circuit pattern that is pre-cut with 2 holes per segment.
- 0.1" hole spacing for DIP integrated circuits and headers.
- Standard single height (3U) Eurocard/VME size. Many off the shelf enclosures and card cages are available.
- ProtoBoard-2H-3U uses a high-quality FR4 glass epoxy board. It has better stability and moisture resistance than boards using phenolic or SRBP (synthetic resin bonded paper) to avoid warping.

Specifications

- Etched FR4 glass-epoxy circuit board.
- 1oz/ft² copper with an anti-tarnish coating for easy soldering.
Lead free and RoHS compatible.
- Holes are drilled on 0.1" (2.54mm) centers.
- 0.037" (0.94mm) holes sized for ICs or square post headers.
- 38 x 62 holes
- Size 3U = 3.9" wide, 6.3" long, 1/16" thick (100 x 160 x 1.6mm).

Order Part# PR2H3U

Board Layout (actual size)

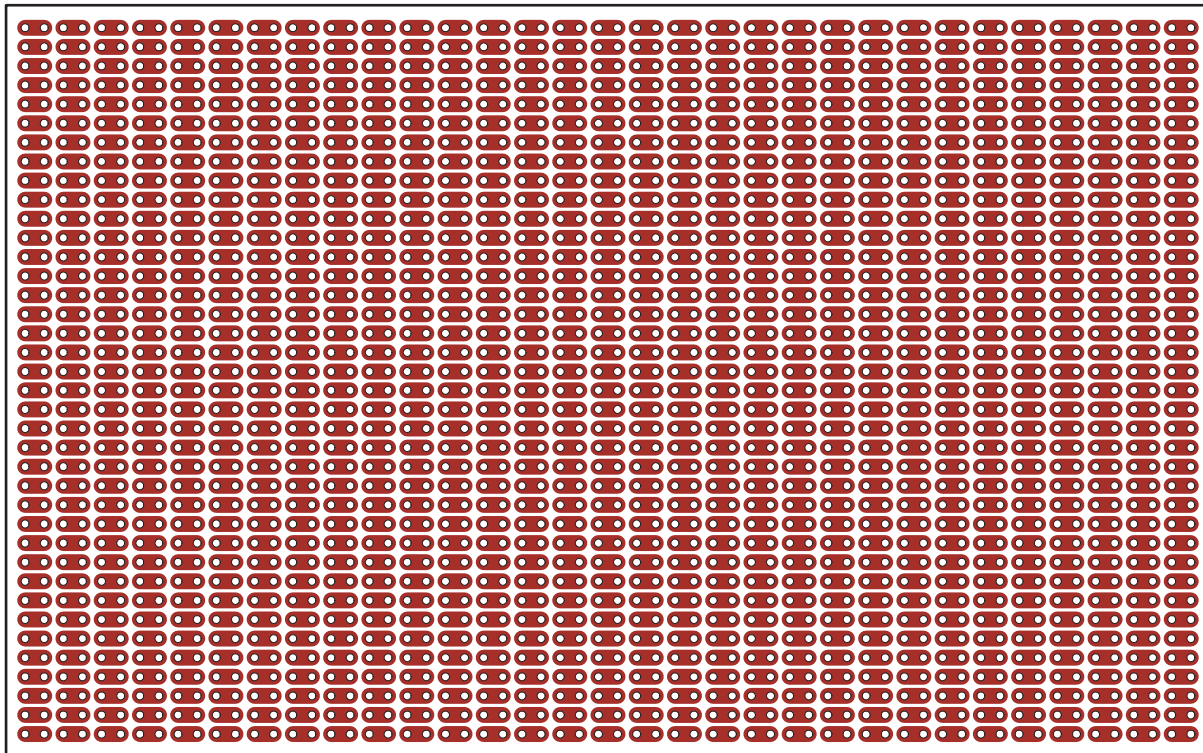

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for PCBs & Breadboards category:

Click to view products by [BusBoard Prototype manufacturer](#):

Other Similar products are found below :

[8004](#) [8007](#) [8016](#) [8017](#) [8028](#) [8029](#) [1268-12](#) [1268-10](#) [1320833-1](#) [923252-R](#) [3410](#) [3396](#) [15107](#) [8006](#) [8015](#) [8018](#) [8019](#) [8020](#) [1268-19](#) [1268-20](#) [8026](#) [1239-19](#) [SBBTH1520-1](#) [SBBTH1506-1](#) [SBBTH4080-1](#) [SBBTH3030-1](#) [SBBTH1512-1](#) [SBBTH1508-1](#) [SBBSM2120-1](#) [SBB2808-1](#) [SBB2805-1](#) [SBB1605-1](#) [SBB1602-1](#) [SBB1005-1](#) [SBB1002-1](#) [3426](#) [32P15WE](#) [ZAS1X206203XRPU160](#) [SBBTH3040-1](#) [SBB0004-1](#) [SBB830-QTY10](#) [7115](#) [923749-I](#) [RE013-LF](#) [RE014-LF](#) [RE015-LF](#) [RE1210-LF](#) [RE200-C3](#) [RE210-S1](#) [RE317-HP](#)