
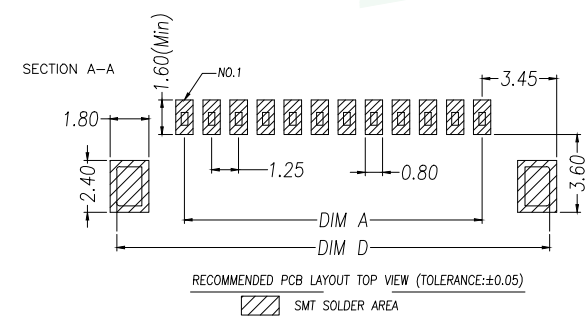

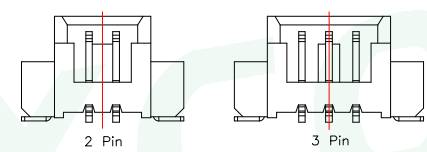
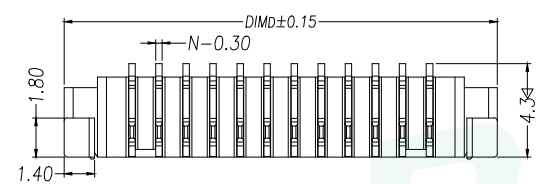
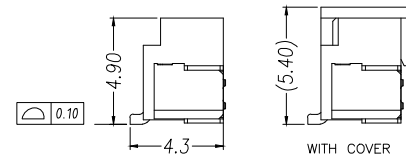
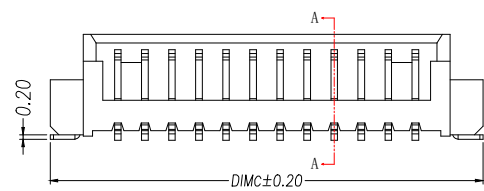
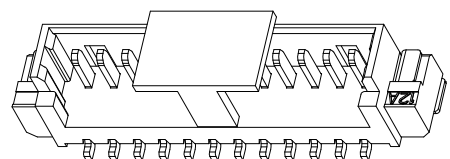


| | | | | | | | | | |
|------|-------------|---|--|---|---------|------|------|---|--|
| A | | B | | C | | D | | E | |
| REV. | DESCRIPTION | | | | ECN NO. | NAME | DATE | | |
| | | | | | | | | | |

NOTES:

- Working temp: -25°C~85°C.
- Voltage rating: 50V AC/DC(rms)
- Contact resistance: 40mΩ max.
- Insulation resistance: 100MΩ min.
- Current rating: 1A AV/DC
- Withstanding Voltage: 500V AC/minute
- Pin Retention Force: 5N min.
- Housing material: LCP UL94-V0, Natural
- Terminal materl: Brass,
plating Ni 40u" min , plating Tin 100u"min.
- Solder tab material: Brass,
plating Ni 40u" min , plating Tin 100u"min.

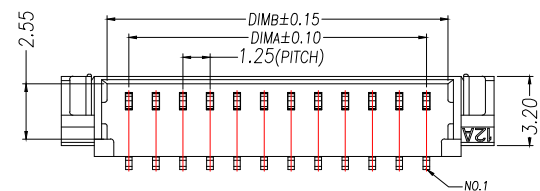


| PIN | NO. | Dim A | Dim B | Dim C | Dim D |
|-----|--------------|-------|-------|-------|-------|
| 2 | WF-1E125A2P | 1.25 | 3.25 | 7.50 | 7.50 |
| 3 | WF-1E125A3P | 2.50 | 4.50 | 8.75 | 8.75 |
| 4 | WF-1E125A4P | 3.75 | 5.75 | 10.00 | 10.00 |
| 5 | WF-1E125A5P | 5.00 | 7.00 | 11.25 | 11.25 |
| 6 | WF-1E125A6P | 6.25 | 8.25 | 12.50 | 12.50 |
| 7 | WF-1E125A7P | 7.50 | 9.50 | 13.75 | 13.75 |
| 8 | WF-1E125A8P | 8.75 | 10.75 | 15.00 | 15.00 |
| 9 | WF-1E125A9P | 10.00 | 12.00 | 16.25 | 16.25 |
| 10 | WF-1E125A10P | 11.25 | 13.25 | 17.50 | 17.50 |
| 11 | WF-1E125A11P | 12.50 | 14.50 | 18.75 | 18.75 |
| 12 | WF-1E125A12P | 13.75 | 15.75 | 20.00 | 20.00 |
| 13 | WF-1E125A13P | 15.00 | 17.00 | 21.25 | 21.25 |
| 14 | WF-1E125A14P | 16.25 | 18.25 | 22.50 | 22.50 |
| 15 | WF-1E125A15P | 17.50 | 19.50 | 23.75 | 23.75 |
| 16 | WF-1E125A16P | 18.75 | 20.75 | 25.00 | 25.00 |

| | | | | | |
|--------------------|-------|---|---------------|----------------|---------------|
| GENERAL TOLERANCE | | DONGGUAN BAOXUN PRECISION TECHNOLOGY CO., LTD | | | |
| DIM. | TOL. | TITLE: 线对板针座 MX1.25 立式贴片 | | | |
| X | | DWG. NO.: WF-1E125ANP | | DRAWN: MAX | |
| X.X | ±0.30 | PART NO.: WF-1E125ANP | | CHECKED: ELLA | |
| X.XX | ±0.25 | UNIT: mm | | APPROVED: WILL | |
| X.XXX | ±0.15 | SCALE: none | SHEET: 1 of 1 | DWG. SIZE: A4 | LAYER: bxconn |
| GENERAL ANGLE: ±3° | | | | | |




| A | | B | | C | | D | | E | |
|------|-------------|---|--|---|---------|------|------|---|--|
| REV. | DESCRIPTION | | | | ECN NO. | NAME | DATE | | |


1

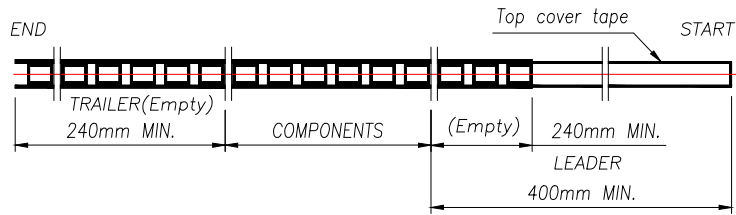



2

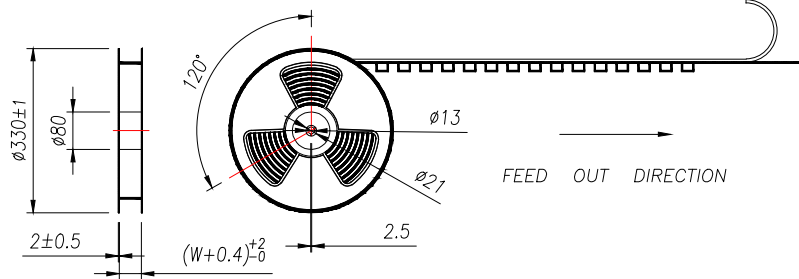

3

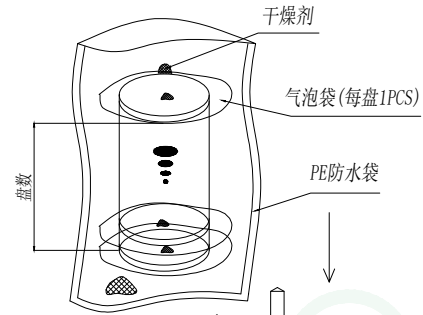

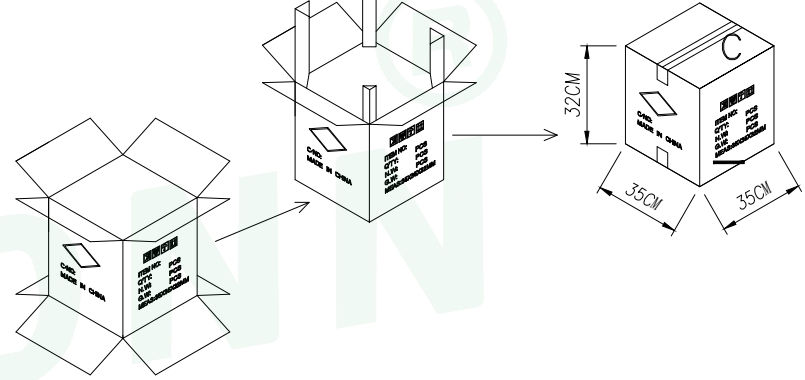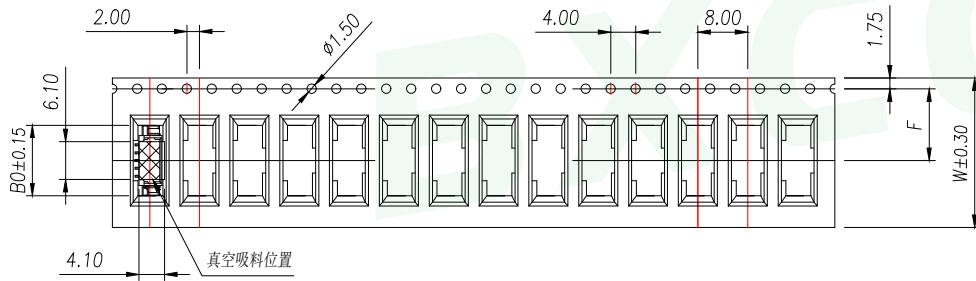

4







- NOTE:
- 1.10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE $\pm 0.2\text{mm}$.
 2. CARRIER CAMBER NOT TO EXCEED 1mm IN 100mm.
 3. ALL DIMENSIONS MEET EIA-481 REQUIREMENTS.
 4. MATERIAL: CLEAR ANTISTATIC PS, COLD SEALING.
 5. COMPONENT LOAD PER REEL: 1500 PCS.

5

| PIN | NO. | B0 | Dim W | Dim F | PCS/REEL | REEL/CARTON | PCS/CARTON |
|-----|-------------|-------|-------|-------|----------|-------------|------------|
| 2 | WF-1E125A2P | 7.80 | 16 | 7.50 | 1500 | 14 | 21000 |
| 3 | WF-1E125A3P | 9.05 | | | | | |
| 4 | WF-1E125A4P | 10.30 | | | | | |
| 5 | WF-1E125A5P | 11.55 | 24 | 11.50 | 1500 | 10 | 15000 |
| 6 | WF-1E125A6P | 12.80 | | | | | |
| 7 | WF-1E125A7P | 14.05 | | | | | |
| 8 | WF-1E125A8P | 15.30 | | | | | |

| | | | | | | | |
|-------------------|----------------------|---|---------------|---------------|---------------|---|--|
| GENERAL TOLERANCE | | DONGGUAN BAOXUN PRECISION TECHNOLOGY CO., LTD | | | |  | |
| DIM. | TOL. | TITLE: 线对板针座 MX1.25 立式贴片 | | | | | |
| X | | DWG. NO.: WF-1E125ANP | | | | DRAWN: MAX | |
| X.X | ± 0.30 | PART NO.: WF-1E125ANP | | | | CHECKED: ELLA | |
| X.XX | ± 0.25 | UNIT: mm | | | | APPROVED: WILL | |
| X.XXX | ± 0.15 | SCALE: none | SHEET: 1 of 1 | DWG. SIZE: A4 | LAYER: bxconn |  | |
| GENERAL | ANGLE: $\pm 3^\circ$ | | | | | | |

| | | | | | | | | | |
|------|-------------|---|--|---|--|---------|------|------|--|
| A | | B | | C | | D | | E | |
| REV. | DESCRIPTION | | | | | ECN NO. | NAME | DATE | |
| | | | | | | | | | |

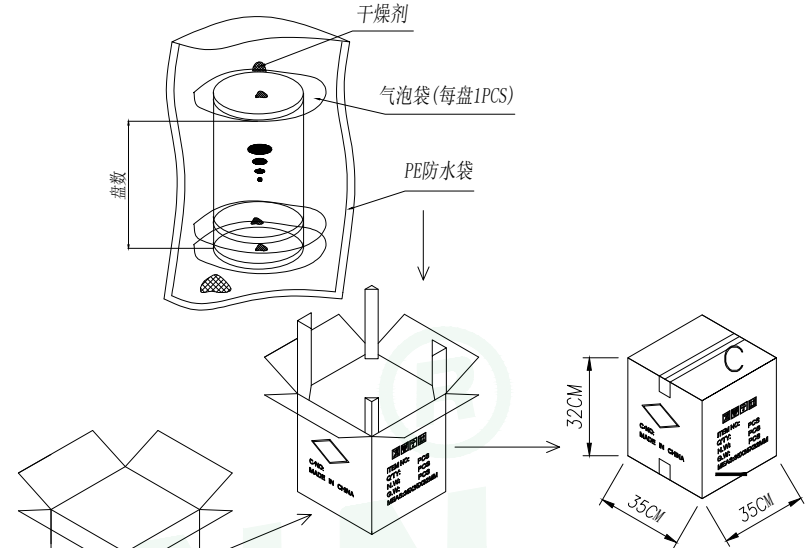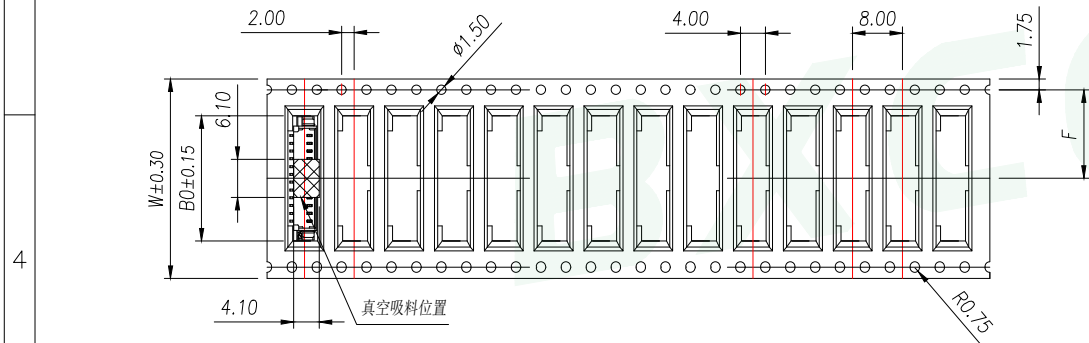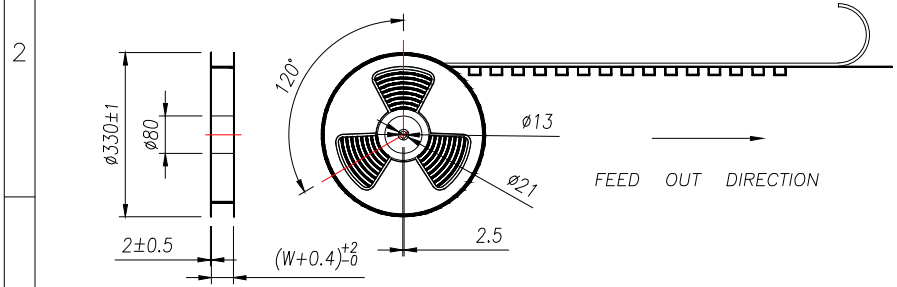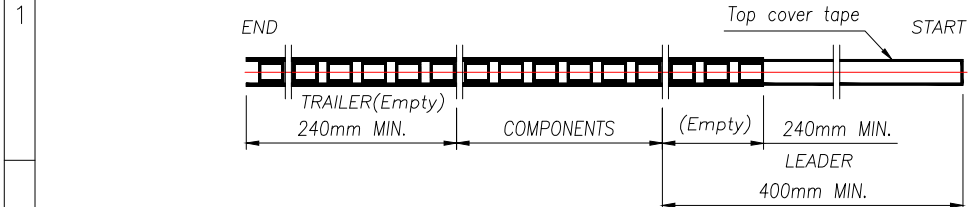

- NOTE:
- 1.10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE $\pm 0.2\text{mm}$.
 - 2.CARRIER CAMBER NOT TO EXCEED 1mm IN 100mm.
 - 3.ALL DIMENSIONS MEET EIA-481 REQUIREMENTS.
 - 4.MATERIAL: CLEAR ANTISTATIC PS, COLD SEALING.
 - 5.COMPONENT LOAD PER REEL: 1500 PCS.

| PIN | NO. | B0 | Dim W | Dim F | PCS/REEL | REEL/CARTON | PCS/CARTON |
|-----|--------------|-------|-------|-------|----------|-------------|------------|
| 09 | WF-1E125A9P | 16.55 | 32 | 14.2 | 1500 | 8 | 12000 |
| 10 | WF-1E125A10P | 17.80 | | | | | |
| 11 | WF-1E125A11P | 19.05 | | | | | |
| 12 | WF-1E125A12P | 20.30 | | | | | |
| 13 | WF-1E125A13P | 21.55 | 44 | 20.2 | 1500 | 6 | 9000 |
| 14 | WF-1E125A14P | 22.80 | | | | | |
| 15 | WF-1E125A15P | 24.05 | | | | | |
| 16 | WF-1E125A16P | 25.30 | | | | | |

| | | | | | | |
|--------------------|--|---|--|---------------|---------------|----------------|
| GENERAL TOLERANCE | | DONGGUAN BAOXUN PRECISION TECHNOLOGY CO., LTD | | | | |
| DIM. TOL. | | TITLE: 线对板针座 MX1.25 立式贴片 | | | | |
| X ±0.30 | | DWG. NO.: WF-1E125ANP | | DRAWN: MAX | | |
| X.X ±0.25 | | PART NO.: WF-1E125ANP | | CHECKED: ELLA | | |
| X.XX ±0.15 | | UNIT: mm | | SCALE: none | SHEET: 1 of 1 | APPROVED: WILL |
| X.XXX ±0.15 | | DWG. SIZE: A4 | | LAYER: bxconn | | |
| GENERAL ANGLE: ±3° | | | | | | |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [BXCONN](#) manufacturer:

Other Similar products are found below :

[0015917161](#) [0022155065](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-](#)
[5028](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#)
[801-43-006-10-002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [820-22-006-30-001101](#)
[820-22-008-30-001101](#) [821-22-002-10-001101](#)