


REV.	DESCRIPTION	ECN NO.	NAME	DATE

- NOTES:
1. Working temp: $-25^{\circ}\text{C} \sim 85^{\circ}\text{C}$.
 2. Voltage rating: 100V AC/DC(rms)
 3. Contact resistance: 40mΩ max.
 4. Insulation resistance: 100MΩ min.
 5. Current rating: 1A AV/DC
 6. Withstanding Voltage: 500V AC/minute
 7. Pin Retention Force: 5N min.
 8. Housing material: LCP UL94-V0, Natural
 9. Terminal materl: Brass,
plating Ni 50u" min , plating Tin 100u" min.
 10. Solder tab material: Brass,
plating Ni 50u" min , plating Tin 100u" min.

PIN	NO.	Dim A	Dim B	Dim C	Dim D
2	WF-1F125A2P	1.25	4.45	7.45	3.05
3	WF-1F125A3P	2.50	5.70	8.70	4.30
4	WF-1F125A4P	3.75	6.95	9.95	5.55
5	WF-1F125A5P	5.00	8.20	11.20	6.80
6	WF-1F125A6P	6.25	9.45	12.45	8.05
7	WF-1F125A7P	7.50	10.70	13.70	9.30
8	WF-1F125A8P	8.75	11.95	14.95	10.55
9	WF-1F125A9P	10.00	13.20	16.20	11.8
10	WF-1F125A10P	11.25	14.45	17.45	13.05
11	WF-1F125A11P	12.50	15.70	18.70	14.3
12	WF-1F125A12P	13.75	16.95	19.95	15.55
13	WF-1F125A13P	15.00	18.20	21.20	16.80
14	WF-1F125A14P	16.25	19.45	22.45	18.05
15	WF-1F125A15P	17.50	20.70	23.70	19.3
16	WF-1F125A16P	18.75	21.95	24.95	20.55




GENERAL TOLERANCE		DONGGUAN BAOXUN PRECISION TECHNOLOGY CO., LTD			
DIM.	TOL.	TITLE: 线对板针座 MX1.25 卧式贴片			
X		DWG. NO.: WF-1F125ANP		DRAWN: MAX	
X.X	±0.30	PART NO.: WF-1F125ANP		CHECKED: ELLA	
X.XX	±0.25	UNIT: mm		SCALE: none	APPROVED: WILL
X.XXX	±0.15	SHEET: 1 of 1	DWG. SIZE: A4	LAYER: bxconn	
GENERAL ANGLE:	±3°				




REV.	DESCRIPTION	ECN NO.	NAME	DATE


1

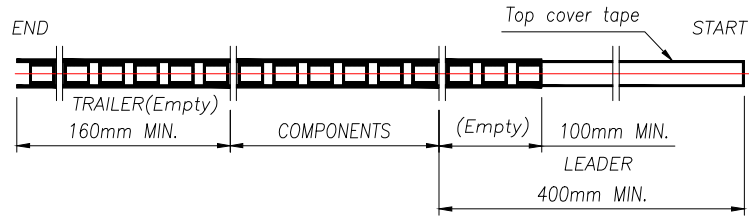


2

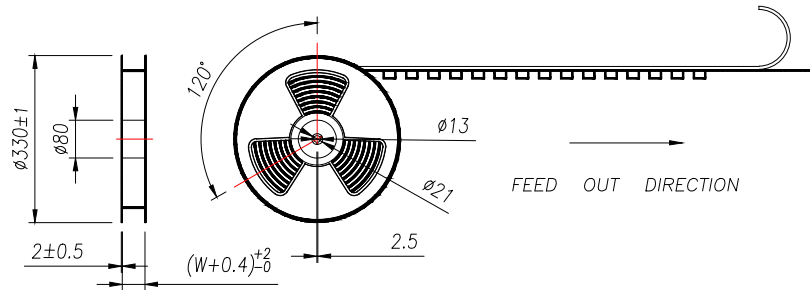

3

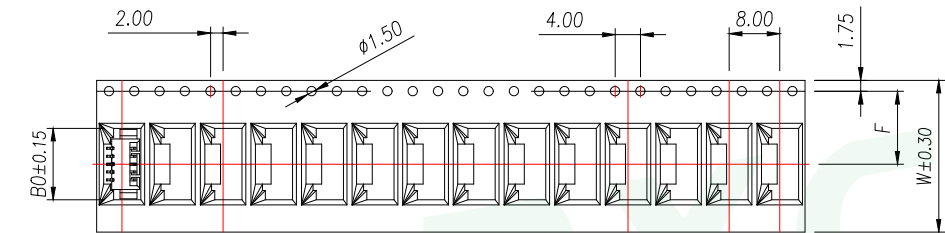


4



5

PIN	NO.	Dim B0	Dim W	Dim F	PCS/RELL	RELL/CARTON	PCS/CARTON
2	WF-1F125A2P	7.55	16	7.5	2000	14	28000
3	WF-1F125A3P	8.80					
4	WF-1F125A4P	10.05	24	11.50		10	20000
5	WF-1F125A5P	11.30					
6	WF-1F125A6P	12.55					
7	WF-1F125A7P	13.80					
8	WF-1F125A8P	15.05					


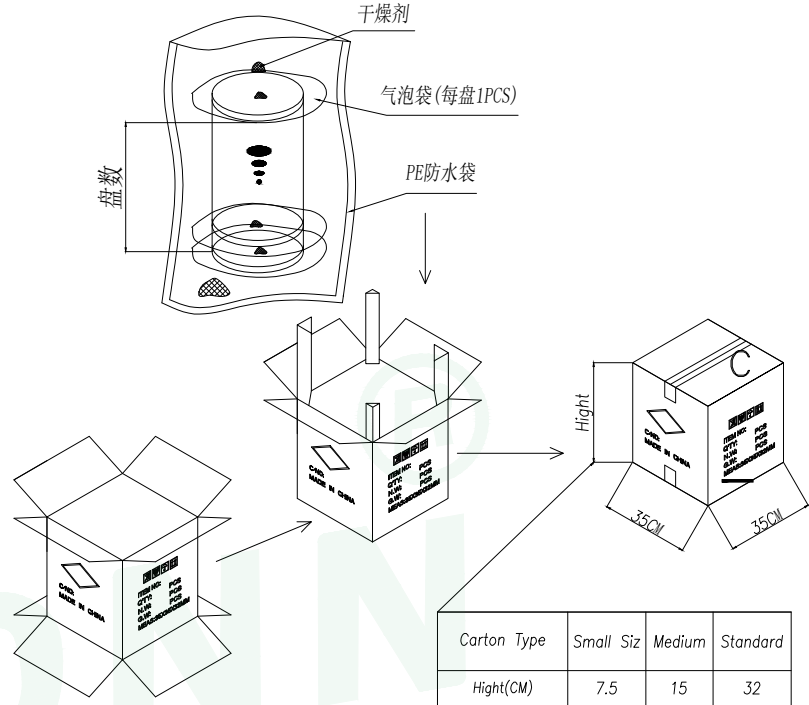


Carton Type	Small Siz	Medium	Standard
Hight(CM)	7.5	15	32

- NOTE:
- 1.10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE $\pm 0.2\text{mm}$.
 - 2.CARRIER CAMBER NOT TO EXCEED 1mm IN 100mm.
 - 3.ALL DIMENSIONS MEET EIA-481 REQUIREMENTS.
 - 4.MATERIAL: CLEAR ANTISTATIC PS, COLD SEALING.
 - 5.THICKNESS: $0.30 \pm 0.05\text{mm}$.
 - 6.PACKING LENGHT PER REEL: 16.5 METERS.
 - 7.COMPONENT LOAD PER REEL: 2000 PCS.

GENERAL TOLERANCE		DONGGUAN BAOXUN PRECISION TECHNOLOGY CO., LTD				
DIM. TOL.		TITLE: 线对板针座 MX1.25 卧式贴片				
X ± 0.30		DWG. NO.: WF-1F125ANP		DRAWN: MAX		
X.X ± 0.25		PART NO.: WF-1F125ANP		CHECKED: ELLA		
X.XX ± 0.15		UNIT: mm		APPROVED: WILL		
X.XXX ± 0.15		SCALE: none	SHEET: 1 of 1	DWG. SIZE: A4	LAYER: bxconn	
GENERAL ANGLE: $\pm 3^\circ$						

REV.	DESCRIPTION	ECN NO.	NAME	DATE

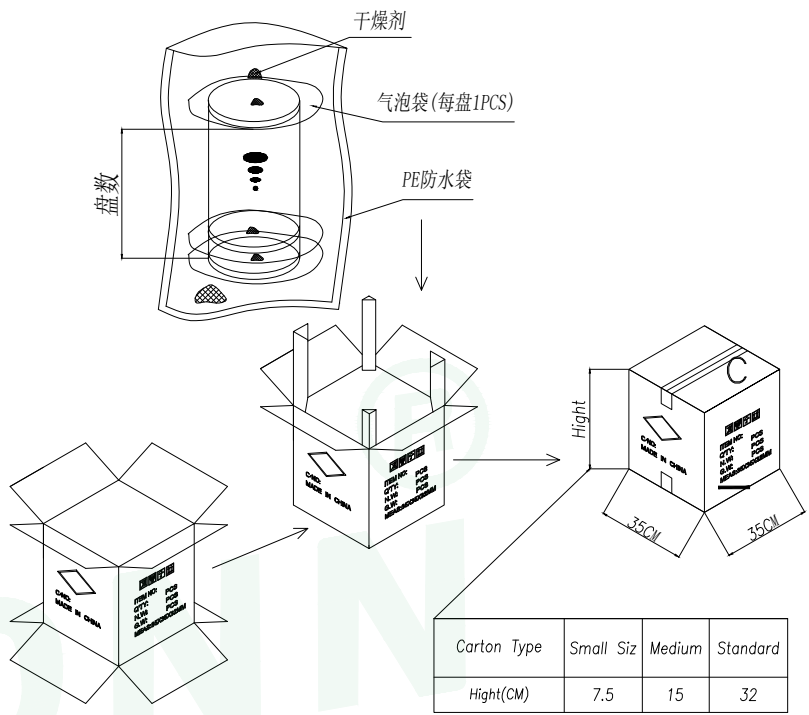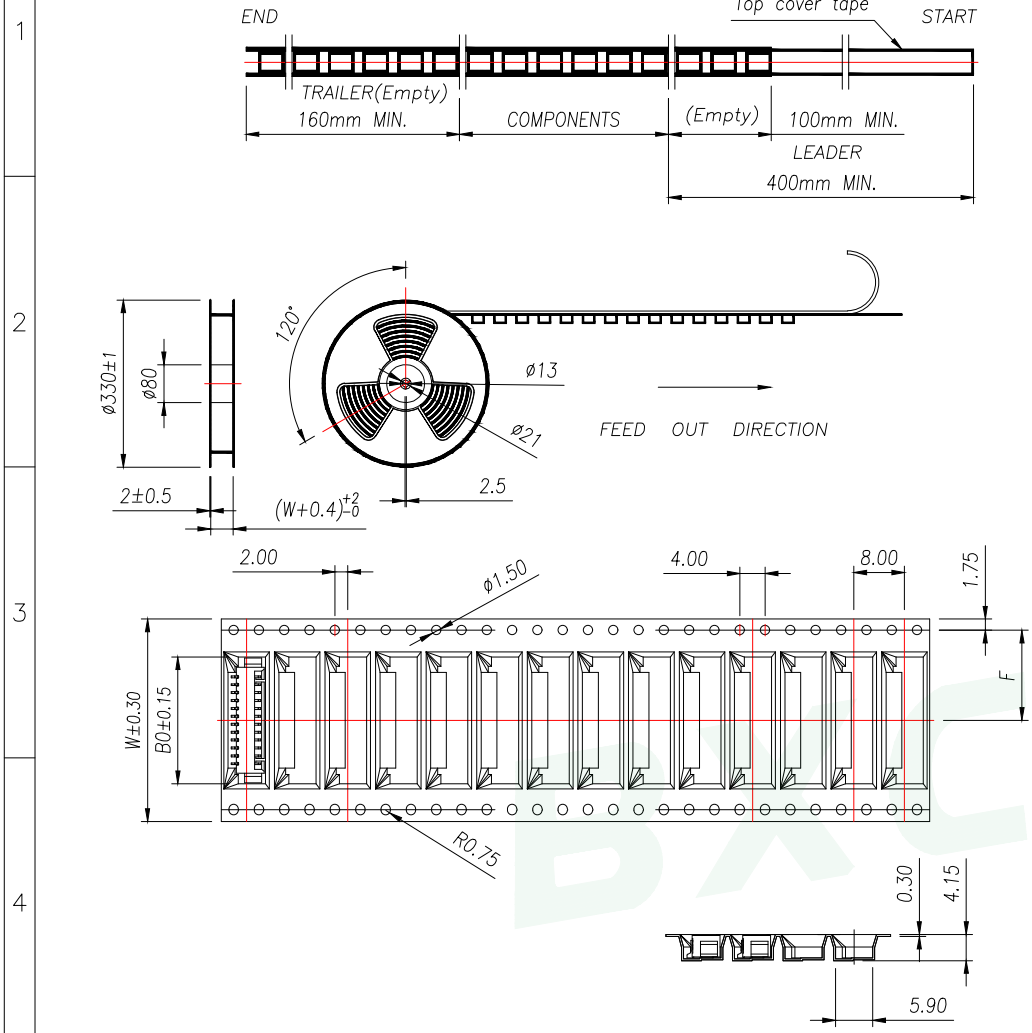

Carton Type	Small Siz	Medium	Standard
High(CM)	7.5	15	32

- NOTE:
- 1.10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE ± 0.2 mm.
 - 2.CARRIER CAMBER NOT TO EXCEED 1mm IN 100mm.
 - 3.ALL DIMENSIONS MEET EIA-481 REQUIREMENTS.
 - 4.MATERIAL: CLEAR ANTISTATIC PS, COLD SEALING.
 - 5.THICKNESS: 0.30 ± 0.05 mm.
 - 6.PACKING LENGTH PER REEL: 16.5 METERS.
 - 7.COMPONENT LOAD PER REEL: 2000 PCS.

PIN	NO.	Dim B0	Dim W	Dim F	PCS/RELL	RELL/CARTON	PCS/CARTON
9	WF-1F125A9P	16.30	32	14.2	2000	8	16000
10	WF-1F125A10P	17.55					
11	WF-1F125A11P	18.80					
12	WF-1F125A12P	20.05					
13	WF-1F125A13P	21.30	44	20.2	6	12000	
14	WF-1F125A14P	22.55					
15	WF-1F125A15P	23.80					
16	WF-1F125A16P	25.05					

GENERAL TOLERANCE		DONGGUAN BAOXUN PRECISION TECHNOLOGY CO., LTD				
DIM. TOL.		TITLE: 线对板针座 MX1.25 卧式贴片				
X ± 0.30		DWG. NO.: WF-1F125ANP		DRAWN: MAX		
X.X ± 0.25		PART NO.: WF-1F125ANP		CHECKED: ELLA		
X.XX ± 0.15		UNIT: mm		APPROVED: WILL		
X.XXX ± 0.15		SCALE: none	SHEET: 1 of 1	DWG. SIZE: A4	LAYER: bxconn	
GENERAL ANGLE: $\pm 3^\circ$						

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [BXCONN](#) manufacturer:

Other Similar products are found below :

[0015917161](#) [0022155065](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-](#)
[5028](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#)
[801-43-006-10-002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [820-22-006-30-001101](#)
[820-22-008-30-001101](#) [821-22-002-10-001101](#)