

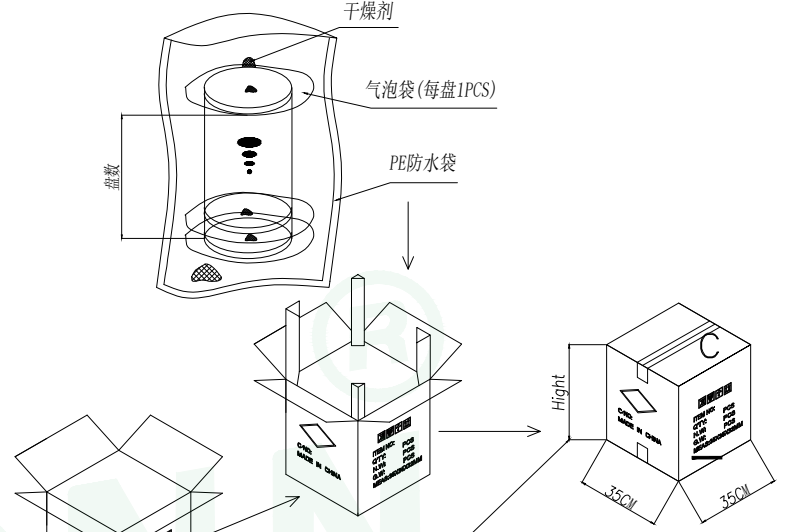
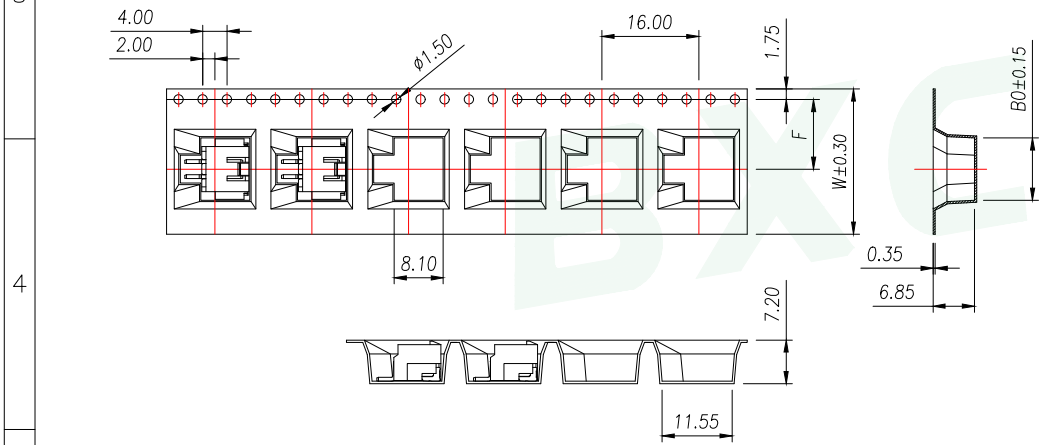


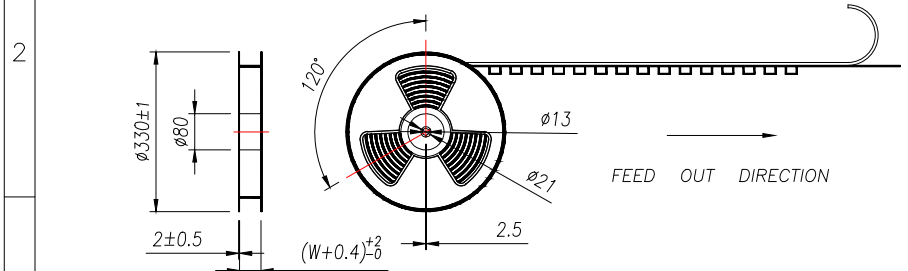

| REV. | DESCRIPTION | ECN NO. | NAME | DATE |
|------|-------------|---------|------|------|
|      |             |         |      |      |

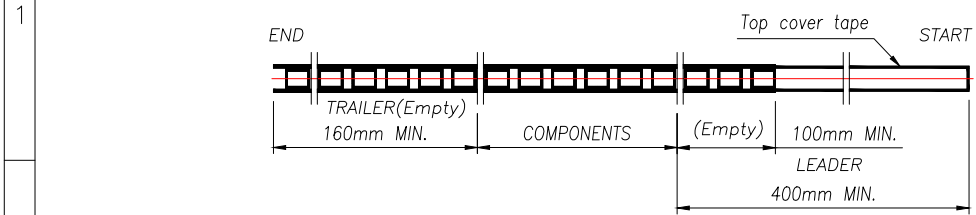

| Carton Type | Small Siz | Medium | Standard |
|-------------|-----------|--------|----------|
| Hight(CM)   | 7.5       | 15     | 32       |

- NOTE:
- 1.10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE  $\pm 0.2\text{mm}$ .
  - 2.CARRIER CAMBER NOT TO EXCEED 1mm IN 100mm.
  - 3.ALL DIMENSIONS MEET EIA-481 REQUIREMENTS.
  - 4.MATERIAL: CLEAR ANTISTATIC PS, COLD SEALING.
  - 5.THICKNESS:  $0.40 \pm 0.05\text{mm}$ .
  - 6.PACKING LENGHT PER REEL: 10 METERS.
  - 7.COMPONENT LOAD PER REEL: 600 PCS.


| PIN | NO.         | Dim B0 | Dim W | Dim F | PCS/RELL | RELL/CARTON | PCS/CARTON |
|-----|-------------|--------|-------|-------|----------|-------------|------------|
| 2   | WF-1F254B2P | 10.30  | 24.00 | 11.50 | 600      | 10          | 6000       |
| 3   | WF-1F254B3P | 12.80  |       |       |          |             |            |
| 4   | WF-1F254B4P | 15.30  |       |       |          |             |            |

|                              |  |   |  |               |               |  |
|------------------------------|--|---|--|---------------|---------------|--|
| GENERAL TOLERANCE            |  | DONGGUAN BAOXUN PRECISION TECHNOLOGY CO., LTD |  |               |               | <br> |
| DIM. TOL.                    |  | TITLE: 线对板针座 XHB2.54 带扣 卧式贴片                  |  |               |               |  |
| X $\pm 0.30$                 |  | DWG. NO.: WF-1F254BNP                         |  | DRAWN: MAX    |               |  |
| X.X $\pm 0.25$               |  | PART NO.: WF-1F254BNP                         |  | CHECKED: ELLA |               |  |
| X.XX $\pm 0.15$              |  | UNIT: mm                                      |  | SCALE: none   | SHEET: 1 of 1 | APPROVED: WILL   |
| X.XXX $\pm 0.15$             |  | DWG. SIZE: A4                                 |  | LAYER: bxconn |               |  |
| GENERAL ANGLE: $\pm 3^\circ$ |  |   |  |               |               |  |


|   |  |   |  |   |  |   |  |   |  |
|---|--|---|--|---|--|---|--|---|--|
| A |  | B |  | C |  | D |  | E |  |
|---|--|---|--|---|--|---|--|---|--|

|      |             |         |      |      |
|------|-------------|---------|------|------|
| REV. | DESCRIPTION | ECN NO. | NAME | DATE |
|      |             |         |      |      |


1

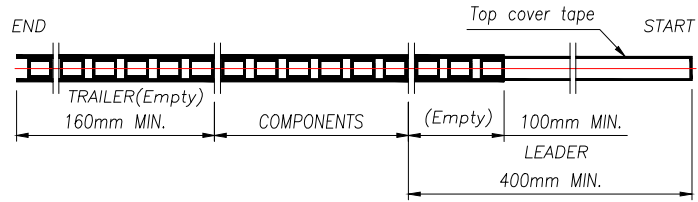



2

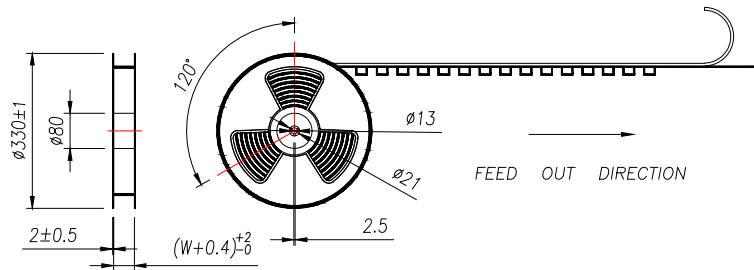

3

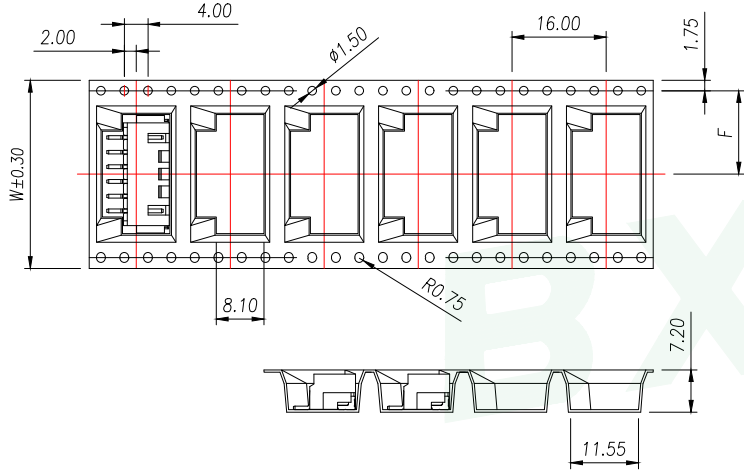

4

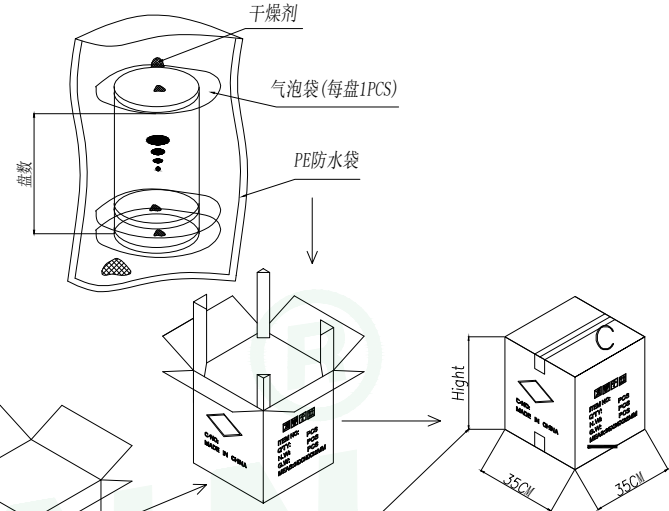

| Carton Type | Small Siz | Medium | Standard |
|-------------|-----------|--------|----------|
| Hight(CM)   | 7.5       | 15     | 32       |

- NOTE:
- 1.10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE  $\pm 0.2\text{mm}$ .
  - 2.CARRIER CAMBER NOT TO EXCEED 1mm IN 100mm.
  - 3.ALL DIMENSIONS MEET EIA-481 REQUIREMENTS.
  - 4.MATERIAL: CLEAR ANTISTATIC PS, COLD SEALING.
  - 5.THICKNESS:  $0.40 \pm 0.05\text{mm}$ .
  - 6.PACKING LENGTH PER REEL: 10 METERS.
  - 7.COMPONENT LOAD PER REEL: 600 PCS.

5

| PIN | NO.          | Dim B0 | Dim W | Dim F | PCS/RELL | RELL/CARTON | PCS/CARTON |
|-----|--------------|--------|-------|-------|----------|-------------|------------|
| 5   | WF-1F254B5P  | 17.80  | 32    | 14.2  | 600      | 8           | 4800       |
| 6   | WF-1F254B6P  | 20.30  |       |       |          |             |            |
| 7   | WF-1F254B7P  | 22.80  |       |       |          |             |            |
| 8   | WF-1F254B8P  | 25.30  | 44    | 20.2  |          | 6           | 3600       |
| 9   | WF-1F254B9P  | 27.80  |       |       |          |             |            |
| 10  | WF-1F254B10P | 30.30  |       |       |          |             |            |
| 11  | WF-1F254B11P | 32.80  | 56    | 26.2  | 5        | 3000        |            |
| 12  | WF-1F254B12P | 35.30  |       |       |          |             |            |

|                   |                      |   |               |                |               |
|-------------------|----------------------|---|---------------|----------------|---------------|
| GENERAL TOLERANCE |                      | DONGGUAN BAOXUN PRECISION TECHNOLOGY CO., LTD |               |                |               |
| DIM.              | TOL.                 | TITLE: 线对板针座 XHB2.54 带扣 卧式贴片                  |               |                |               |
| X                 |                      | DWG. NO.: WF-1F254BNP                         |               | DRAWN: MAX     |               |
| X.X               | $\pm 0.30$           | PART NO.: WF-1F254BNP                         |               | CHECKED: ELLA  |               |
| X.XX              | $\pm 0.25$           | UNIT: mm                                      |               | APPROVED: WILL |               |
| X.XXX             | $\pm 0.15$           | SCALE: none                                   | SHEET: 1 of 1 | DWG. SIZE: A4  | LAYER: bxconn |
| GENERAL           | ANGLE: $\pm 3^\circ$ |   |               |                |               |

**BXCONN**<sup>®</sup>

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [BXCONN](#) manufacturer:*

Other Similar products are found below :

[0015917161](#) [0022155065](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)  
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)  
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-](#)  
[5028](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#)  
[801-43-006-10-002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [820-22-006-30-001101](#)  
[820-22-008-30-001101](#) [821-22-002-10-001101](#)