


ALL DIMENSIONS ARE IN mm

Part Number	Class 2r Wire Size	Class 5f & 6f Wire Size	Stud Size	Wire Strip Length	Panduit Die Index No. For Class 2r Wire Circumferential Dies	Panduit Die Index No. For Class 5f & 6f Wire Circumferential Dies	Panduit Die Index No. For Class 5f & 6f Wire Nest/Indentor Dies	l ±2.76	o ±.50	i ±.50	a ±2.25	m (ref)	n ±1.25	d ±.50	b ±1.25	t
LCMB10-5-L	10 mm <sup>2</sup>	-----	M5	25.6	P21	-----	-----	43.8	6.20	4.50	24.0	9.8	6.0	5.50	11.0	1.20 ± .35
LCMB10-6-L	10 mm <sup>2</sup>	-----	M6	25.6	P21	-----	-----	43.8	6.20	4.50	24.0	9.8	6.0	6.60	11.0	1.20 ± .35
LCMB10-8-L	10 mm <sup>2</sup>	-----	M8	25.6	P21	-----	-----	43.8	6.20	4.50	24.0	8.5	8.0	9.00	13.0	1.05 ± .35
LCMB10-10-L	10 mm <sup>2</sup>	-----	M10	25.6	P21	-----	-----	43.8	7.14	4.36	24.0	8.5	8.0	11.00	14.5	1.65 ± .35
LCMB16-5-L	16 mm <sup>2</sup>	10 mm <sup>2</sup>	M5	28.8	P21	P21	-----	47.2	7.20	5.50	27.2	10.3	6.5	5.50	13.0	1.26 ± .40
LCMB16-6-L	16 mm <sup>2</sup>	10 mm <sup>2</sup>	M6	28.8	P21	P21	-----	47.2	7.20	5.50	27.2	10.3	6.5	6.60	13.0	1.26 ± .40
LCMB16-8-L	16 mm <sup>2</sup>	10 mm <sup>2</sup>	M8	28.8	P21	P21	-----	47.2	7.20	5.50	27.2	10.3	6.5	9.00	13.0	1.20 ± .40
LCMB16-10-L	16 mm <sup>2</sup>	10 mm <sup>2</sup>	M10	28.8	P21	P21	-----	49.4	7.20	5.50	27.2	10.2	8.0	11.00	15.0	1.10 ± .40
*LCMB25-5-L	25 mm <sup>2</sup>	16 mm <sup>2</sup>	M5	28.3	P29	P21	-----	48.7	8.80	6.90	26.7	10.0	8.0	5.50	14.0	1.60 ± .40
LCMB25-6-L	25 mm <sup>2</sup>	16 mm <sup>2</sup>	M6	28.3	P29	P21	-----	48.7	8.80	6.90	26.7	10.0	8.0	6.60	14.0	1.60 ± .40
LCMB25-8-L	25 mm <sup>2</sup>	16 mm <sup>2</sup>	M8	28.3	P29	P21	-----	48.7	8.80	6.90	26.7	10.0	8.0	9.00	15.5	1.60 ± .40
LCMB25-10-L	25 mm <sup>2</sup>	16 mm <sup>2</sup>	M10	28.3	P29	P21	-----	48.7	8.80	6.90	26.7	10.0	8.0	11.00	15.5	1.50 ± .40

\* cULus LISTED WIRE CONNECTOR

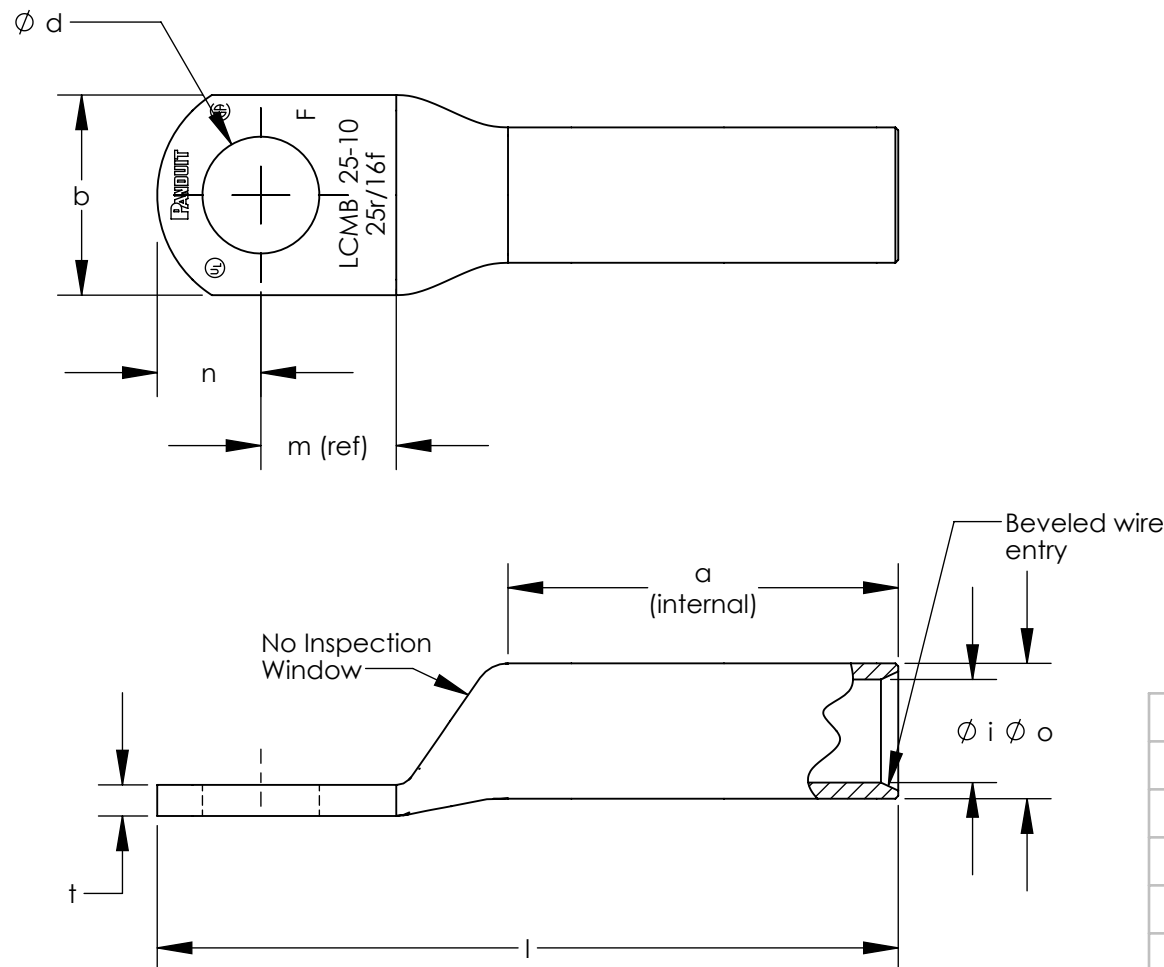

- NOTES:
1. Material: High conductivity seamless copper tube.
  2. Plating: Parts are annealed and tin plated.
  3. Wire Type: Class 2r, 5f & 6f Stranded Copper per DIN VDE 0295, IEC 60228 and HD 383.
  4. UL Listed Wire Connector: Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.
  5. UL Temperature Rating: 90° C
  6. C.S.A. Certified Wire Connector: Yes
  7. Parts are CE and tested per EN 61238-1:2003/IEC 61238-1:2003 Class B, with Class 2r wire 10mm<sup>2</sup> - 25mm<sup>2</sup>.

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
01	7/15	JHNU	TLCO	RGB	ADDED LCMB25-5-L	12J036BH-JC
00	7/13	JHNU	TLCO	RGB	DRAWING RELEASED	12J036BH-JC

TITLE <b>METRIC LUGS - LCMB ONE HOLE SERIES 10-25mm LONG BARREL CUSTOMER DRAWING</b>						
ITEM REVISION NAME 12J036BH/01						
DATASET FILE NAME 12J036BH-JC/01.SLDDRW						
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]						
.X ± .XXX ± .XX ± ANGLES ±						
THIRD ANGLE PROJECTION						
DRAWN BY JHNU						
DATE 7/13						
CHK TLCO						
SCALE NONE						
MATERIAL SEE NOTES						
DRAWING NUMBER 12J036BH-JC						
SHEET 1 OF 1						
SIZE B						

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Terminals](#) category:*

*Click to view products by [Panduit](#) manufacturer:*

Other Similar products are found below :

[HT-13-10](#) [71M-250-32-NB](#) [01-2065-1-0216](#) [00581P0075](#) [M10-10RX](#) [M10BCK](#) [60205-1](#) [604200-1](#) [60598-1-CUT-TAPE](#) [60617-1-C](#) [60873-1](#) [M14-516R/SK](#) [M14-6RSX](#) [M18-10FLX](#) [M18-8FBX](#) [M18-8R/LX](#) [M18BCK](#) [61314-6-C](#) [61-S](#) [61-SN-A](#) [62-NBM-A](#) [63-S](#) [640179-1](#) [640917-2-CUT-TAPE](#) [6501550002](#) [66107-2-C](#) [696683-1](#) [696834-1](#) [696861-1](#) [696931-1](#) [696999-1](#) [M8-516RK](#) [M86700006](#) [MA250DMFMX-A](#) [701-2007](#) [701-2307](#) [701-7761-03](#) [70F-110-32-PB](#) [718-N-A](#) [71M-187-20-NBL](#) [71M-250-32-NBL](#) [72F-187-20-NBL](#) [72M-250-32-NBL](#) [7310](#) [73F-250-32](#) [73F-250-32-NBL](#) [73F-250-32-NL](#) [F14-10C](#) [F-1M](#) [751-250](#)