


ALL DIMENSIONS ARE IN (mm)											
Part Number	Wire Size	Wire Class	Wire Strip Length	*UL Listed Stud Hole Diameter Size Range (1 or 2 Stud Holes)	$l \pm 2.76$	$o \pm .50$	$i \pm .50$	$a \pm 2.25$	c	b	t
LCMDX10-00-Q	10 mm ²	5f & 6f	16.0	5.50 - 11.0	81.2	7.20	5.50	14.5	62.7±1.25	15.0±1.25	1.10±.40
LCMDX16-00-Q	16 mm ²	5f & 6f	16.5	5.50 - 11.0	89.5	9.52	7.14	15.0	70.5±1.25	20.0±1.25	1.60±.40
LCMDX25-00-Q	25 mm ²	5f & 6f	19.0	6.60 - 11.0	92.5	10.40	8.20	17.5	70.5±2.25	21.5±2.25	1.50±.40
LCMDX35-00-Q	35 mm ²	5f & 6f	21.8	6.60 - 14.0	94.5	12.30	9.80	20.3	69.5±2.25	23.0±2.25	1.80±.40
LCMDX50-00-X	50 mm ²	5f & 6f	24.8	6.60 - 14.0	98.0	14.20	11.50	23.3	70.5±2.25	20.8±2.25	2.80±.40
LCMDX70-00-X	70 mm ²	5f & 6f	26.0	6.60 - 14.0	105.0	16.50	13.50	24.5	73.0±2.25	24.5±2.25	2.90±.40
LCMDX95-00-X	95 mm ²	5f & 6f	26.0	9.0 - 18.0	109.5	18.60	15.20	24.5	74.5±2.25	27.5±2.25	3.40±.45
LCMDX120-00-X	120 mm ²	5f & 6f	29.0	9.0 - 18.0	118.5	21.00	16.50	27.5	83.0±2.25	30.5±2.25	4.30±.45
LCMDX150-00-X	150 mm ²	5f & 6f	29.7	9.0 - 22.0	121.5	23.00	18.60	28.2	83.0±2.25	33.5±2.25	4.40±.50
LCMDX185-00-X	185 mm ²	5f & 6f	36.5	11.0 - 22.0	131.0	26.00	20.80	35.0	85.0±2.25	37.5±2.25	5.20±.50
LCMDX240-00-5	240 mm ²	5f & 6f	41.8	11.0 - 22.0	139.0	29.00	23.50	40.3	86.5±2.25	42.5±2.25	5.30±.55
LCMDX300-00-5	300 mm ²	5f	46.3	11.0 - 22.0	151.5	33.00	26.20	44.8	94.5±2.25	48.0±2.25	6.70±.55



- NOTES:
1. Material: High conductivity seamless copper tube.
 2. Plating: Parts are annealed and tin plated.
 3. WireType: Class 5 and 6 Flexible Stranded Copper Conductor per DIN VDE 0295, IEC 60228, and HD 383.
 4. UL Listed & CSA Certified Wire Connectors for applications up to 35kv, when crimped per instruction sheet included with Panduit packaging. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.
 5. UL & CSA Temperature Rating: 90°C
 6. *Stud holes to be centered along the centerline of the tongue (palm).

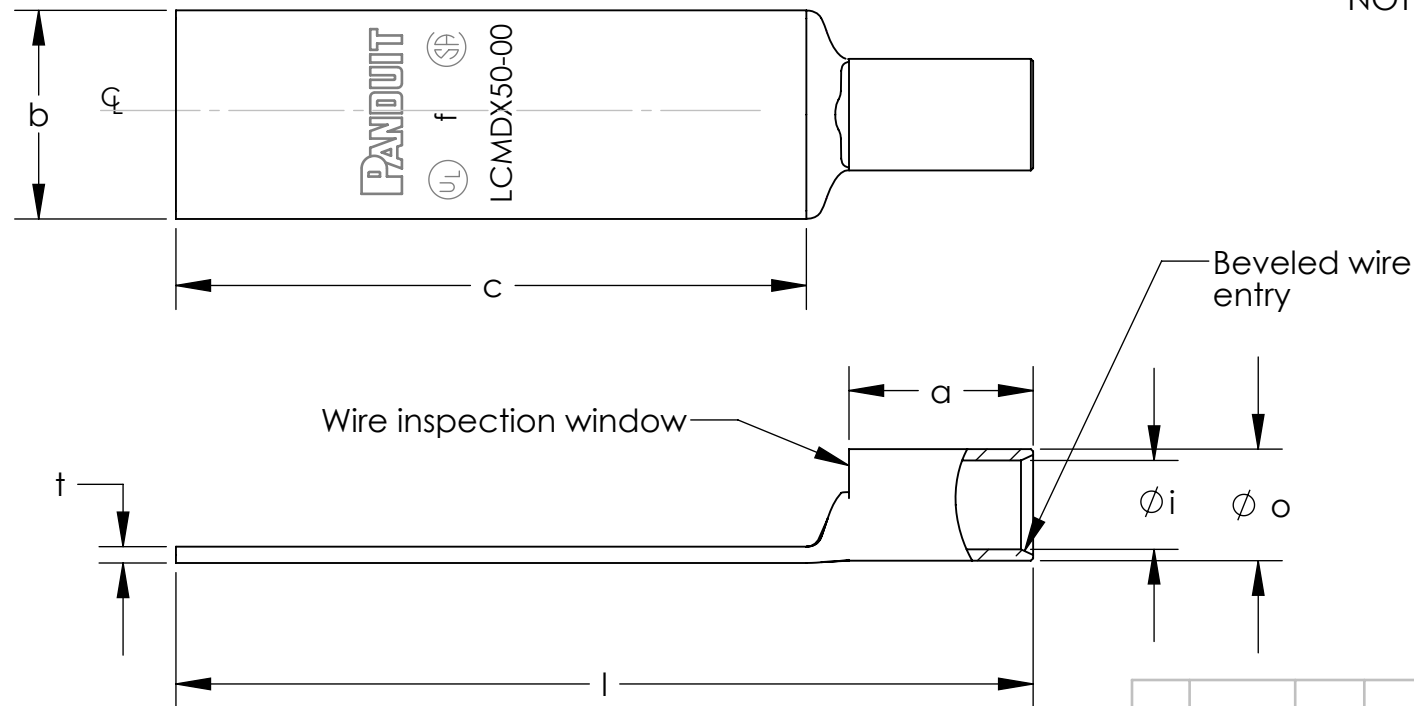

PANDUIT CORP. TINLEY PARK, ILLINOIS									
METRIC FLEX LUGS - LCMDX SERIES 10-300mm ² BLANK TONGUE CUSTOMER DRAWING									
					UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCES ARE: (.X) ± (.XXX) ± (.XX) ± ANGLES ±			UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION	
					DRAWN BY TLCO		MAT'L:		SCALE NONE
					DATE 5/11		SEE NOTES ABOVE		DRAWING NO / CAD FILE
					CHK'D TLCO				10N014BD-NC
00	11/12	TLCO	TLCO		DRAWING RELEASED	10N014BD-NC	RGB	RGB	
REV	DATE	BY	CHK		DESCRIPTION	ECN	-R	SUP	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Terminals](#) category:

Click to view products by [Panduit](#) manufacturer:

Other Similar products are found below :

[HT-13-10](#) [71M-250-32-NB](#) [01-2065-1-0216](#) [00581P0075](#) [M10-10RX](#) [M10BCK](#) [60205-1](#) [604200-1](#) [60598-1-CUT-TAPE](#) [60617-1-C](#) [60873-1](#) [M14-516R/SK](#) [M14-6RSX](#) [M18-10FLX](#) [M18-8FBX](#) [M18-8R/LX](#) [M18BCK](#) [61314-6-C](#) [61-S](#) [61-SN-A](#) [62-NBM-A](#) [63-S](#) [640179-1](#) [640917-2-CUT-TAPE](#) [6501550002](#) [66107-2-C](#) [696683-1](#) [696834-1](#) [696861-1](#) [696931-1](#) [696999-1](#) [M8-516RK](#) [M86700006](#) [MA250DMFMX-A](#) [701-2007](#) [701-2307](#) [701-7761-03](#) [70F-110-32-PB](#) [718-N-A](#) [71M-187-20-NBL](#) [71M-250-32-NBL](#) [72F-187-20-NBL](#) [72M-250-32-NBL](#) [7310](#) [73F-250-32](#) [73F-250-32-NBL](#) [73F-250-32-NL](#) [F14-10C](#) [F-1M](#) [751-250](#)