
THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL	TO THE INTERESTS OF DANDUIT CORD
THIS COFT IS FROVIDED ON A RESTRICTED DASIS AND IS NOT TO BE USED IN ANT WAT DETRIMENTAL	TO THE INTERESTS OF FANDOIT CORF.


ALL DIMENSIONS ARE IN (mm)														
Part Number	Wire Size	Wire Class	Stud Size	Wire Strip Length	l ±2.76	o ±.50	i ±.50	a ±2.25	m (ref)	c ±.50	n	d ±.50	b	t
LCMDX10-8-Q	10 mm ²	5f & 6f	M8	16.0	79.0	7.20	5.50	14.5	10.3	44.50	6.5±1.25	9.00	13.0±1.25	1.20±.40
LCMDX16-8-Q	16 mm²	5f & 6f	M8	16.5	81.5	8.80	6.90	15.0	10.0	44.50	8.0±1.25	9.00	15.5±1.25	1.60±.40
LCMDX25-8-Q	25 mm ²	5f & 6f	M8	19.0	86.5	10.40	8.20	17.5	12.3	44.50	8.5±2.25	9.00	15.5±2.25	2.05±.40
LCMDX25-10-Q	25 mm ²	5f & 6f	M10	19.0	86.5	10.40	8.20	17.5	12.3	44.50	8.5±2.25	11.00	15.5±2.25	2.05±.40
LCMDX25-12-Q	25 mm ²	5f & 6f	M12	19.0	<mark>92.</mark> 5	10.40	8.20	17.5	14.5	44.50	11.5±2.25	14.00	21.5±2.25	1.50±.40
LCMDX35-10-Q	35 mm ²	5f & 6f	M10	21.8	91.0	12.30	9.80	20.3	11.5	44.50	10.0±2.25	11.00	18.0±2.25	2.50±.40
LCMDX35-12-Q	35 mm ²	5f & 6f	M12	21.8	<mark>94.</mark> 5	12.30	9.80	20.3	14.0	44.50	11.0±2.25	14.00	23.0±2.25	1.80±.40
LCMDX50-10-X	50 mm ²	5f & 6f	M10	24.8	98.0	14.20	11.50	23.3	14.5	44.50	11.5±2.25	11.00	20.8±2.25	2.85±.40
LCMDX50-12-X	50 mm ²	5f & 6f	M12	24.8	98.0	14.20	11.50	23.3	14.5	44.50	11.5±2.25	14.00	20.8±2.25	2.80±.40
LCMDX70-10-X	70 mm ²	5f & 6f	M10	26.0	105.0	16.50	13.50	24.5	15.0	44.50	13.5±2.25	11.00	24.5±2.25	3.00±.40
LCMDX70-12-X	70 mm ²	5f & 6f	M12	26.0	105.0	16.50	13.50	24.5	15.0	44.50	13.5±2.25	14.00	24.5±2.25	3.00±.40
LCMDX95-12-X	95 mm²	5f & 6f	M12	26.0	109.5	18.60	15.20	24.5	15.5	44.50	14.5±2.25	14.00	27.5±2.25	3.50±.45
LCMDX95-14-X	95 mm²	5f & 6f	M14	26.0	109.5	18.60	15.20	24.5	15.5	44.50	14.5±2.25	16.00	27.5±2.25	3.40±.45
LCMDX120-12-X	120 mm²	5f & 6f	M12	29.0	115.0	21.00	16.50	27.5	18.0	44.50	16.5±2.25	14.00	30.5±2.25	4.45±.45
LCMDX120-14-X	120 mm ²	5f & 6f	M14	29.0	118.5	21.00	16.50	27.5	22.0	44.50	16.5±2.25	16.00	30.5±2.25	4.30±.45
LCMDX150-12-X	150 mm²	5f & 6f	M12	29.7	117.0	23.00	18.60	28.2	16.5	44.50	17.5±2.25	14.00	33.5±2.25	4.55±.50
LCMDX150-14-X	150 mm²	5f & 6f	M14	29.7	121.5	23.00	18.60	28.2	21.0	44.50	17.5±2.25	16.00	33.5±2.25	4.40±.50
LCMDX185-12-X	185 mm²	5f & 6f	M12	36.5	131.0	26.00	20.80	35.0	21.0	44.50	19.5±2.25	14.00	37.5±2.25	5.30±.50
LCMDX185-14-X	185 mm²	5f <mark>& 6</mark> f	M14	36.5	131.0	26.00	20.80	35.0	21.0	44.50	19.5±2.25	16.00	37.5±2.25	5.30±.50
LCMDX240-12-5	240 mm ²	5f <mark>& 6</mark> f	M12	41.8	139.0	29.00	23.50	40.3	22.0	44.50	20.0±2.25	14.00	42.5±2.25	5.40±.55
LCMDX240-14-5	240 mm ²	5f <mark>& 6</mark> f	M14	41.8	139.0	29.00	23.50	40.3	22.0	44.50	20.0±2.25	16.00	42.5±2.25	5.40±.55
LCMDX300-12-5	300 mm ²	5f	M12	46.3	151.5	33.00	26.20	44.8	26.5	44.50	23.5±2.25	14.00	48.0±2.25	6.70±.55
LCMDX300-14-5	300 mm ²	5f	M14	46.3	151.5	33.00	26.20	44.8	26.5	44.50	23.5±2.25	16.00	48.0±2.25	6.70±.55


NOTES: 1. Material: High conductivity seamless copper tube.

- 2. Plating: Parts are annealed and tin plated.
- 3. WireType: Class 5 and 6 Flexible Stranded Copper Conductor per DIN VDE 0295, IEC 60228, and HD 383.
- 4. UL Listed & CSA Certified Wire Connectors for applications up to 35kv, when crimped per instruction sheet included with Panduit packaging. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.



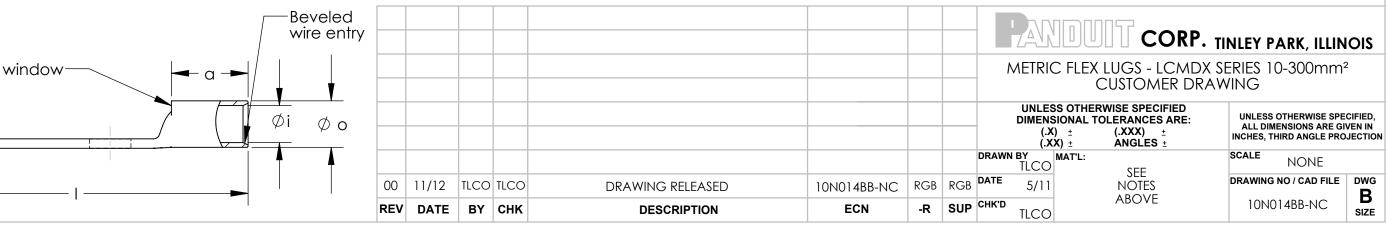

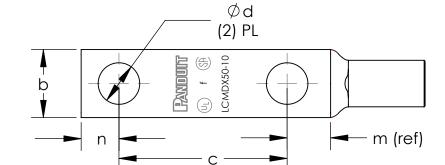

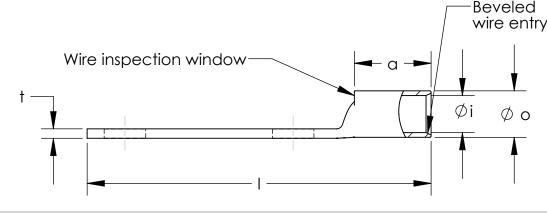



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Terminals category:

Click to view products by Panduit manufacturer:

Other Similar products are found below :

HT-13-10 71M-250-32-NB 01-2065-1-0216 00581P0075 M10-10RX M10BCK 60205-1 604200-1 60598-1-CUT-TAPE 60617-1-C 60873-1 M14-516R/SK M14-6RSX M18-10FLX M18-8FBX M18-8R/LX M18BCK 61314-6-C 61-S 61-SN-A 62-NBM-A 63-S 640179-1 640917-2-CUT-TAPE 6501550002 66107-2-C 696683-1 696834-1 696861-1 696931-1 696999-1 M8-516RK M86700006 MA250DMFMX-A 701-2007 701-2307 701-7761-03 70F-110-32-PB 718-N-A 71M-187-20-NBL 71M-250-32-NBL 72F-187-20-NBL 72M-250-32-NBL 7310 73F-250-32 73F-250-32-NBL 73F-250-32-NL F14-10C F-1M 751-250