


# Type TF Low TC Ultra-Precision Film Resistors

**Absolute TC to 5 ppm/°C, Values from 1 Kohm to 125 Megohms, Absolute Tolerance to ±0.01%**

Type TF precision resistors employ the Caddock Tetrinox® resistance films - the resistance system that sets a new standard for high value, ultra-stable precision resistors that provide an exceptional combination of performance characteristics:

- **Ultra-Precision** - Five standard resistance tolerances from ±1% to ±0.01%.
- **A Wide Range of Resistance Values** - from 1 Kohm to 125 Megohms.
- **Low Temperature Coefficient** - 5 ppm/°C, 10 ppm/°C, or 15 ppm/°C.
- **Long-Term Stability** - to 0.01% per 1,000 hours.

This approach to quantity production of ultra-precision discrete resistors is the result of combining our unique complex oxide resistance film technology with an advanced high thru-put laser manufacturing capability.

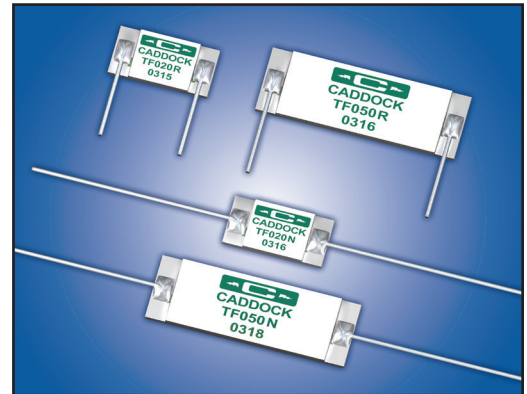


## Type TF - Standard Resistance Range - 1 Kohm to 10 Megohms

Model Number		Wattage @ +70°C	Maximum Continuous Oper. Voltage	Resistance		Dimensions inches (mm)	
Axial Leads	Radial Leads			Min.	Max.	A	B
TF020N	TF020R	0.33	300	1 K	2 Meg	.750 ±.020 (19.05 ±.51)	.375 ±.020 (9.53 ±.51)
TF050N	TF050R	0.75	1,400	10 K	10 Meg	1.500 ±.020 (38.10 ±.51)	.500 ±.020 (12.70 ±.51)

**Shelf Life:** Typically 0.0025% per year

**Load Stability:**



## Type TF - Extended Resistance Range - 2 Megohms to 125 Megohms

Model Number		Wattage @ +70°C	Maximum Continuous Oper. Voltage	Resistance		Dimensions inches (mm)	
Axial Leads	Radial Leads			Min.	Max.	A	B
TF626N	TF626R	0.33	300	2.01 Meg	35 Meg	.750 ±.020 (19.05 ±.51)	.375 ±.020 (9.53 ±.51)
TF656N	TF656R	0.75	1,400	10.01 Meg	125 Meg	1.500 ±.020 (38.10 ±.51)	.500 ±.020 (12.70 ±.51)

**Shelf Life:** Typically 0.005% per year

**Load Stability:** 1,000 hours at rated voltage at +70°C, maximum ΔR 0.03%

## Specifications:

Apply to all Type TF resistor models.

**Absolute Temperature Coefficient:** 5 ppm/°C, 10 ppm/°C, or 15 ppm/°C referenced to +25°C, ΔR taken at -15°C and +105°C.



**Resistance Tolerance:** ±0.01%, ±0.025%, ±0.05%, ±0.10%, or ±1.0%.

**Load Life:** For ±0.10% or tighter tolerance, 1,000 hours at +70°C. Load stability versus applied power is shown in the load stability curve on this page.

**Storage Temperature:** -55°C to +105°C.

**Leadwire:** Tinned Copper.

**Derating Curve:**

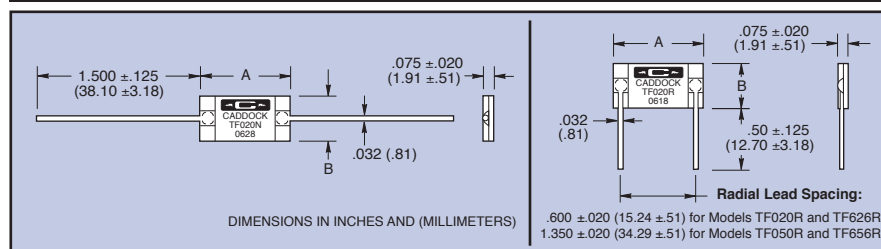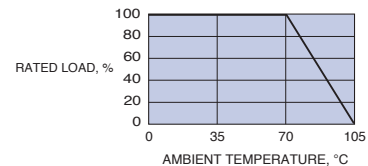


## Ordering Information:

<b>TF050R - 10.0 Meg - 0.01% - 10 ppm/°C</b>			
Model Number	Resistor Value	Tolerance	Temperature Coefficient

## Custom Type TF Resistors

Additional cost savings can be realized when your high volume ultra-precision Type TF resistor is optimized for:

- Lightning transient capability
- Voltage rating
- Power rating
- Mechanical configuration
- Ratio matched sets

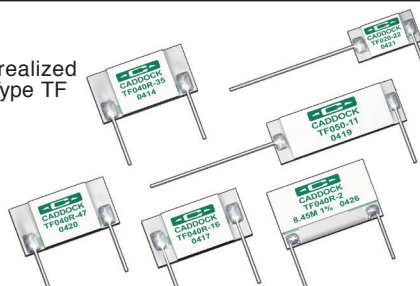

And for special requirements, custom Type TF resistors are available with:

- TC of 5 ppm/°C, 10 ppm/°C, 15 ppm/°C, 20 ppm/°C, or 25 ppm/°C.
- Shelf stability of 0.0025% per year.

Type TF resistors can also be produced with custom-spaced radial leads that will plug directly into your existing circuit layout.

**CADDOCK ELECTRONICS, INC.**

e-mail: [caddock@caddock.com](mailto:caddock@caddock.com) • web: [www.caddock.com](http://www.caddock.com)

For Caddock Distributors listed by country see [caddock.com/contact/dist.html](http://caddock.com/contact/dist.html)

**Sales and Applications Engineering**

17271 North Umpqua Hwy.

Roseburg, Oregon 97470-9422

Phone: (541) 496-0700

Fax: (541) 496-0408

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Thick Film Resistors - Through Hole](#) category:*

*Click to view products by [Caddock](#) manufacturer:*

Other Similar products are found below :

[M8340104M4701GCD03](#) [M8340105K3300GGD03](#) [M8340105K3922FGD03](#) [M8340106K1002JCD03](#) [M8340107K1002GGD03](#)  
[M8340107K1152FGD03](#) [M8340107K2701GCD03](#) [M8340107M2002GCD03](#) [M8340108K1000GCD03](#) [M8340108K5601GCD03](#)  
[M8340108M2203GCD03](#) [M8340109K1002JCD03](#) [M8340109K1003GCD03](#) [M8340109K5101GGD03](#) [FHV05010M0FKRB](#) [MOX-2-125005F](#) [MP850-3.00-1%](#) [hte24511kf](#) [SM-SP093](#) [ARC3.11 2M J A](#) [M8340105K1001GCD03](#) [M8340105K3002GGD03](#)  
[M8340105M1002JGD03](#) [M8340107K2001GGD03](#) [M8340107K4701GGD03](#) [M8340107K5101GGD03](#) [M8340107K5600GGD03](#)  
[M8340108K4990FGD03](#) [M8340108K49R9FGD03](#) [M8340108M10R0GGD03](#) [M8340109K2202GGD03](#) [M8340109K5601GCD03](#) [MOX-GRD-001](#) [MOX-SP020](#) [MOX-SP025E](#) [M8340107K2001GCD03](#) [M8340102M4701GBD04](#) [M8340102K1002GBD04](#)  
[M8340102K1002GAD04](#) [M8340109K2002GGD03](#) [M8340108K22R0GGD03](#) [M8340107M5100GGD03](#) [OE1305](#) [WMHP100-R22J](#)  
[M8340104K39R2FCD03](#) [M8340106MA012JHD03](#) [M8340107K1003GGD03](#) [MS126-9.09K-0.1%](#) [MS126-249K-0.1%](#) [MS-221-82R5](#)