THIS IS ISSUED IN STRICT CONFIDENCE THAT IT IS NOT USED AS A BASIS FOR MANUFACTURE OR SALE AND THAT IT IS NOT COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE PRIOR WRITTEN CONSENT OF CAL TEST ELECTRONICS, INC.

NOTES:


1. SPECIFICATION: JACKET: SILICONE. MULTI-LAYER, 1ST LAYER WHITE; 2ND LAYER "COLOR" OD: .146±.008 (3.7 mm) CONDUCTOR: BARE COPPÈR, STRANDING 195 x 0.07 mm = 0.75 mm2, 18 AWG.

2. RATING:

VOLTAGE: 1,000 V CAT IV PER IEC 61010-031 CURRENT: 12 A MAX. TEMPERATURE: -60° C TO $+180^{\circ}$ C.

3. AVAILABLE IN 3 STANDARD LENGTHS AND 6 COLORS - SEE MODEL NUMBER BELOW.

REVISIONS								
REV.	DESCRIPTIONS	DATE	APPROVED					
_	CLASS A RELEASED	7/11/99						
А	UPDATED FORMAT w/ CAGE CODE	4/18/04						

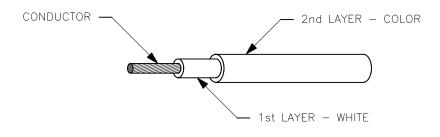

MODEL NUMBER CT2799-#-XXX

-COLOR: 0 - BLACK

2 - RED

4 - YELLOW 5 - GREEN

6 - BLUE

9 - WHITE

THIRD ANGLE PROJECTION		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	CONTRACT NO.			- 1 T	4 = 1-	-4!		22820 Savi Ranch Parkway	,
		TOLERANCES ARE: FRACTIONS DECIMALS ± 1/32 .XX ± .02 .XXX ± .005 DO NOT SCALE DRAWING		_		ai res	st Ele	ctronic	S	Yorba Linda, CA 92887-46	
$+\oplus$	-[-+		APPROVALS	DATE	TITLE	TITLE					
			drawn WDH	7/11/99	W	WIRE, TEST LEAD, SILICONE JACKET,					Τ,
			CHECKED			0.75 mm ₂ , 18 AWG, 12 A					
		FINISH	ENGR.		SIZE	CAGE CODE		DWG. NO.	D2	79900	REV.
NEXT ASSY	USED ON		DESIGN ACTIVITY		Α	43F4	15		۲ ۷	79900	А
APPLICATION					scale NONE			SHEET 1 OF 1			

-----LENGTH: 10 - 10 m PACKAGE

50 - 50 m SPOOL

100 - 100 m SPOOL

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Test Leads category:

Click to view products by Cal Test manufacturer:

Other Similar products are found below:

795-2384-10-25 1301430020 1510-24-105 15308 15408 15302 15409 BU-1149-A-36-0 BU-1481-E-12-0 BU-1481-E-24-0 1927617 2450 2524-A-60 LB1F-2R-RED LB1F-2R-YLW 2500 2524-A-48 2977-J-48 R948131000 380200 BU-1449-E-12-2 BU-1480-E-24-0 BU-1481-E-12-2 BU-1481-E-24-2 LB1F-2R-BLK LB1F-2R-BLUE LB1F-2R-WHT 6345 6432 6416 EM3782-24-3# R948161002 R948160002 R948170002 R948171002 R948163002 973604100 934160101 934160100 R948174000 CT3269 CT3258 CT3158-100 HSPL 8568/AWG16/200/RT HSPL 8568/AWG16/200/SW 28.0119-10020 28.0127-05025 28.0127-20025 49.0079-20021 49.0079-20024