



CT3197B User Manual



CT3197B HV Probe BNC Converter User Manual

© 2018 Cal Test Electronics. All rights reserved.

Unauthorized duplication of Cal Test Electronics documentation materials is strictly prohibited. Customers are permitted to duplicate and distribute Cal Test Electronics documentation for internal educational purposes only.

Safety Summary

To avoid personal injury and/or product damage, review and comply with the following safety precautions. These precautions apply to both operating and maintenance personnel and must be followed during all phases of operation, service, and repair of this probe.



A **WARNING** statement calls attention to an operating procedure, practice, or condition, which, if not followed correctly, could result in injury or death to personnel.



A **CAUTION** statement calls attention to an operating procedure, practice, or condition, which, if not followed correctly, could result in damage to or destruction of parts or the entire product.

Do Not Work Alone

Do not work alone when working with high voltages.

Dry Conditions

Hands, shoes, floor, and work bench must be dry. Avoid making measurements under humidity, dampness, or other environmental conditions that might affect safety.

Hazardous Contact

To avoid injury, remove jewelry such as rings, watches, and other metallic objects. Do not touch exposed connections and components when power is present.



Use Only in Office-Type Indoor Setting

The converter is designed to be used in office-type indoor environments. Do not operate high voltage probes:

- In the presence of noxious, corrosive, flammable fumes, gases, vapors, chemicals, or finely-divided particulates.
- In environments where there is a danger of any liquid being spilled on the probe.
- In air temperatures exceeding the specified operating temperatures.
- In atmospheric pressures outside the specified altitude limits or where the surrounding gas is not air.

Only Qualified Personnel

This converter is intended for personnel who are trained, experienced, or otherwise qualified to recognize hazardous situations and who are trained in the safety precautions necessary to avoid possible injury when using such a device.

Observe Maximum Working Voltage

Do not use this converter with any probe above its maximum working voltage ranges.

Must be Grounded

Do not rely on this converter for high voltage probe grounding. Always properly ground the high voltage probe with its ground lead before connecting to high voltage circuits. Always disconnect the probe from high voltage circuits before disconnecting the ground lead. Do not connect the probe ground lead to any point which is at a potential other than earth ground.

Cleaning

Use a soft cotton cloth lightly moistened with a mild solution of detergent and water. Do not allow any portion to be submerged at any time. Dry thoroughly before attempting to make voltage measurements. Do not use solvents or solvent fumes as they may cause deterioration or damage.



Compliance Statements

EC Declaration of Conformity

The product conforms to the applicable European Union requirements per the Low Voltage Directive (LVD) 2014/35/EU. Compliance was demonstrated to the following specification as listed in the official Journal of the European Communities:

IEC/EN 601010-031:2015 Safety requirements for electrical equipment for measurement, control and laboratory use. Part 031: Safety requirements for hand-held probe assemblies for electrical measurement and test.

EU RoHS Compliance

These accessories conform to the 2011/65/EU RoHS Directive.

Disposal



(Applicable in the European Union and other European countries with separate collection systems). This product is subject to Directive 2012/19/EU of the European Parliament and the Council of the European Union on waste electrical and electronic equipment (WEEE), and in jurisdictions adopting that Directive, is marked as being put on the market after August 13, 2005, and should not be disposed of as unsorted

municipal waste. Please utilize your local WEEE collection facilities in the disposition of this product.

Introduction

The CT3197B High Voltage Probe BNC Converter is designed as an impedance converter to adapt Cal Test High Voltage Oscilloscope Probes to Digital Multimeters (DMMs) that feature $10M\Omega$ input impedance.



Features

- Two (2) piece design
- High accuracy (± 0.5%)
- 50 MHz bandwidth
- Gold plated, beryllium copper contacts

Product Overview

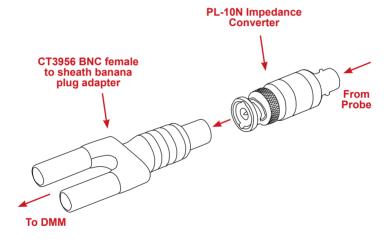


Figure 1 CT3197B: Description

Usage Instructions

- Connect the impedance converter to BNC Adapter
- Connect HV probe to assembled converter
- Plug assembled converter into DMM



Specifications

All specifications apply to the unit after a temperature stabilization time of 20 minutes over an ambient range of 25° C \pm 5° C.

PL-10N Electrical and Mechanical Characteristics	
Bandwidth	50 MHz
Accuracy	± 0.5%
Maximum Input Voltage (DC/AC)	250 VDC/ 200 Vrms
Maximum Working Power	1 W
Input Impedance	1.111 ΜΩ
Dimensions	48 mm (L) x Ø 16 mm (D)
Weight	25 g
CT3956 Electrical and Mechanical Characteristics	
Maximum Input Voltage (AC)	500 Vrms
Maximum Current	3 A
Input Impedance	50 Ω (BNC)
Dimensions (L x W x H)	70 mm x 28 mm x 14 mm
Weight	23 g



Service & Warranty Information

Limited One-Year Warranty

Cal Test Electronics warrants these products to be free from defective material or workmanship for a period of 1 year from the date of original purchase. Under this warranty, Cal Test Electronics is limited to repairing the defective device when returned to the factory, shipping charges prepaid, within the warranty period.

Units returned to Cal Test Electronics that have been subject to abuse, misuse, damage, or accident, or have been connected, installed, or adjusted contrary to the instructions furnished by Cal Test Electronics, or that have been repaired by unauthorized persons, will not be covered by this warranty.

Cal Test Electronics reserves the right to discontinue models, change specifications, price, or design of this device at any time without notice and without incurring any obligation whatsoever.

The purchaser agrees to assume all liabilities for any damages and/or bodily injury which may result from the use or misuse of this device by the purchaser, his employees, or agents.

This warranty is in lieu of all other representations or warranties expressed or implied and no agent or representative of Cal Test Electronics is authorized to assume any other obligation in connection with the sale and purchase of this device.

Service

If you have a need for calibration or repair services, technical, or sales support, please contact us:

22820 Savi Ranch Parkway Yorba Linda, CA 92887 800-572-1028 or 714-221-9330 caltestelectronics.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Test Accessories - Other category:

Click to view products by Cal Test manufacturer:

Other Similar products are found below:

AO1026 AO1035 AO1051 AO1059 149116 149118 RS40 RS41 AO1030 AO1032 AO1036 AO1058 4742 KTS288540 11-32-2733 00415 00163 PACC-ZD005 PACC-ZD007 700M20TH 628824000 MPT-VF B3 15010A0A0100M0 B3 15050A0D01A2M0 B3 1505A00A01A1M0 B3 15060A0D0100M0 98-CAL020 MO-SCREEN 68-020-01P CVRF02 CPAK8 RT-ZA19 LCR-OPT-02 1-1437358-1 4408 POMONA DME D110 T1 LMLH 50 FLUKE PM9082/001 85392-12 ST18/SMAM/SMAM/72 HO720 45025 45028 CT2300 CC545 VT-1000 CT3041 VS-AVT-CABLE-08 6172A 68-023-01