


THIS IS ISSUED IN STRICT CONFIDENCE THAT IT IS NOT USED AS A BASIS FOR MANUFACTURE OR SALE AND THAT IT IS NOT COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE PRIOR WRITTEN CONSENT OF CAL TEST ELECTRONICS, INC.

REVISIONS			
REV.	DESCRIPTIONS	DATE	APPROVED
-	CLASS A RELEASED	9/7/11	
A	Updated Note 1, material was BeCu; Deleted Note 2.	2/18/15	

NOTES:

- OUTER CONDUCTOR AND BODY - BRASS, NICKEL PLATED.  
CENTER CONDUCTOR - BRASS AND PHOS. BRONZE, GOLD PLATED.  
DIELECTRIC - (TEF) FLUOROCARBON.
- n/a
- SPECIFICATIONS:  
 FREQUENCY RANGE - DC TO 4 GHz.  
 ATTENUATION ACCURACY - 0 TO 6 dB ±0.3 dB.  
                                   7 TO 20 dB ±0.5 dB.  
                                   21 TO 30 dB ± 0.75 dB.  
 VSWR (MAX) - DC TO 4 GHz 1.25:1.  
 POWER - 2 W (AVG.) @ 25° C DERATED LINEARLY TO 0.5 W @ 125° C  
           250 W (PEAK) 5 μs PULSE WIDTH, 0.05% DUTY CYCLE.  
 IMPEDANCE - 50 Ω ±1 Ω TYP.  
 OPERATING TEMPERATURE: -65° C TO +125° C.  
 TEMPERATURE COEFFICIENT: 10-4 dB/dB/°C.

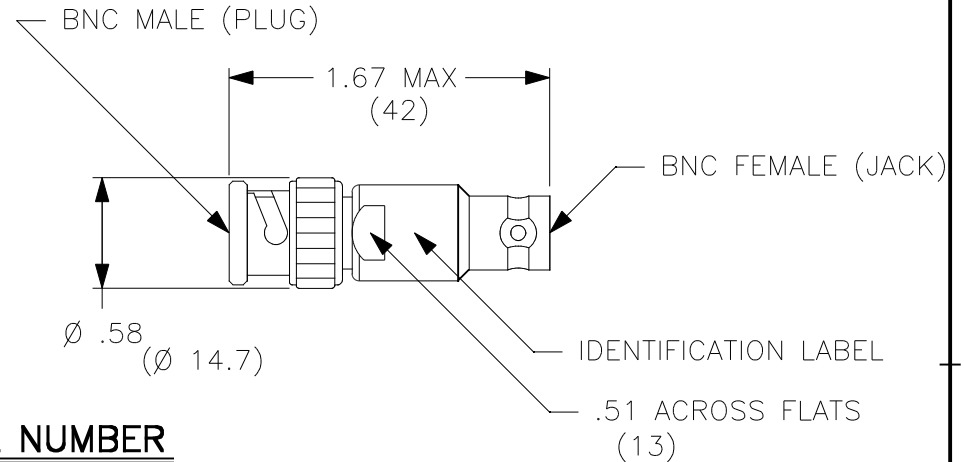

**MODEL NUMBER**  
**CT3369A-XX**

- ATTENUATION (dB):
- 03 - 3 dB
  - 06 - 6 dB
  - 08 - 8 dB
  - 10 - 10 dB
  - 14 - 14 dB
  - 20 - 20 dB
  - 30 - 30 dB

THIRD ANGLE PROJECTION		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS    DECIMALS ± 1/32        .XX ± .02 .XXX ± .005 DO NOT SCALE DRAWING	CONTRACT NO.		<b>Cal Test Electronics</b> 22820 Savi Ranch Parkway Yorba Linda, CA 92887-4610			
			APPROVALS	DATE	TITLE			
		MATERIAL	DRAWN    WDH	9/7/11	<b>ATTENUATOR, FIXED, BNC MALE TO FEMALE, 50Ω</b>			
		FINISH	CHECKED		SIZE	CAGE CODE	DWG. NO.	REV.
NEXT ASSY	USED ON		ENGR.		<b>A</b>	<b>43F45</b>	<b>P3369A0</b>	<b>A</b>
APPLICATION			DESIGN ACTIVITY		SCALE	1:1	SHEET	1 OF 1

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Attenuators - Interconnects](#) category:*

*Click to view products by [Cal Test](#) manufacturer:*

Other Similar products are found below :

[R414701000](#) [R411800121](#) [R413840115](#) [ATT-523F-05-SMA-02](#) [R413305000](#) [R411808121](#) [R412501124](#) [R414702000](#) [ATP8-10006KV](#)  
[R414705000](#) [R411710124](#) [R410220121](#) [CT3369A-20](#) [09AS102-K40S3](#) [R411802000](#) [ATT-263F-03-SMA-02](#) [R417320130](#) [R412508124](#)  
[R417030110](#) [ATT-523F-12-SMA-02](#) [ATT-263F-06-SMA-02](#) [ATT-0263-22-SMA-02](#) [ATT-263F-10-SMA-02](#) [ATT-523F-10-SMA-02](#)  
[R422030020](#) [R422020030](#) [R417506130](#) [ATT-0263-25-SMA-02](#) [R413810000](#) [R411810124](#) [R413803000](#) [R417330110](#) [ATT-0290-02-HEX-](#)  
[02](#) [R415603000](#) [R415620000](#) [R415606000](#) [R415610000](#) [ATT-0290-00-SMA-02](#) [AT-130V](#) [CATTEN-05R0-BNC](#) [CATTEN-04R0-BNC](#)  
[6620\\_SMA-50-1/199\\_NE](#) [6630\\_SMA-50-2/199\\_NE](#) [CATTEN-06R0-BNC](#) [ATT-0294-02-SMA-02](#) [ATT-0298-06-HEX-02](#) [6610\\_SMA-50-](#)  
[2/199\\_NE](#) [6605\\_SMA-50-1/199\\_NE](#) [6820.17.A](#) [6803.17.B](#)