


THIS IS ISSUED IN STRICT CONFIDENCE THAT IT IS NOT USED AS A BASIS FOR MANUFACTURE OR SALE AND THAT IT IS NOT COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE PRIOR WRITTEN CONSENT OF CAL TEST ELECTRONICS, INC.

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	6/15/2021	B. HANSEN

- NOTES:**
- ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.
 - ATTENUATOR TO MEET OR EXCEED ALL SPECIFICATIONS PER MIL-39012.
 - MATING DIMENSIONS IN ACCORDANCE WITH MIL-STD-348.
 - VSWR AND FREQUENCY RANGE SPECIFICATIONS ARE FOR REFERENCE AND ARE DEPENDANT ON CABLE TYPE AND OTHER APPLICATION SPECIFIC CONDITIONS.
 - MATERIAL:
 - CONNECTOR BODY: STAINLESS STEEL, PASSIVATED
 - CENTER CONTACT: BeCu, GOLD PLATED
 - DIELECTRIC: NORYL
 - ELECTRICAL:
 - IMPEDANCE: 50 Ω
 - FREQUENCY: DC - 18 GHz
 - POWER SENSITIVITY: <0.005 dB/dB/W (BIDIRECTIONAL IN POWER)
 - INPUT POWER: 2 W AVERAGE TO 25°C AMBIENT TEMPERATURE, DE-RATED LINEARLY TO 1.25 W @ 75°C AND 0.5 W @ 125°C, 500 W PEAK (5 μs PULSE, 0.2% DUTY CYCLE)
 - VSWR:
 - 1.15:1 @ DC - 4 GHz
 - 1.20:1 @ 4 - 8 GHz
 - 1.25:1 @ 8 - 12 GHz
 - 1.35:1 @ 12.4 - 18 GHz
 - ATTENUATOR CONFIGURATION: TEE PAD.
 - MECHANICAL:
 - TEMPERATURE RANGE: -55°C to +125°C
 - TEMPERATURE COEFFICIENT: <0.0004 dB/dB/°C
 - COUNTRY OF ORIGIAN: USA
 - RoHS AND REACH COMPLIANT.

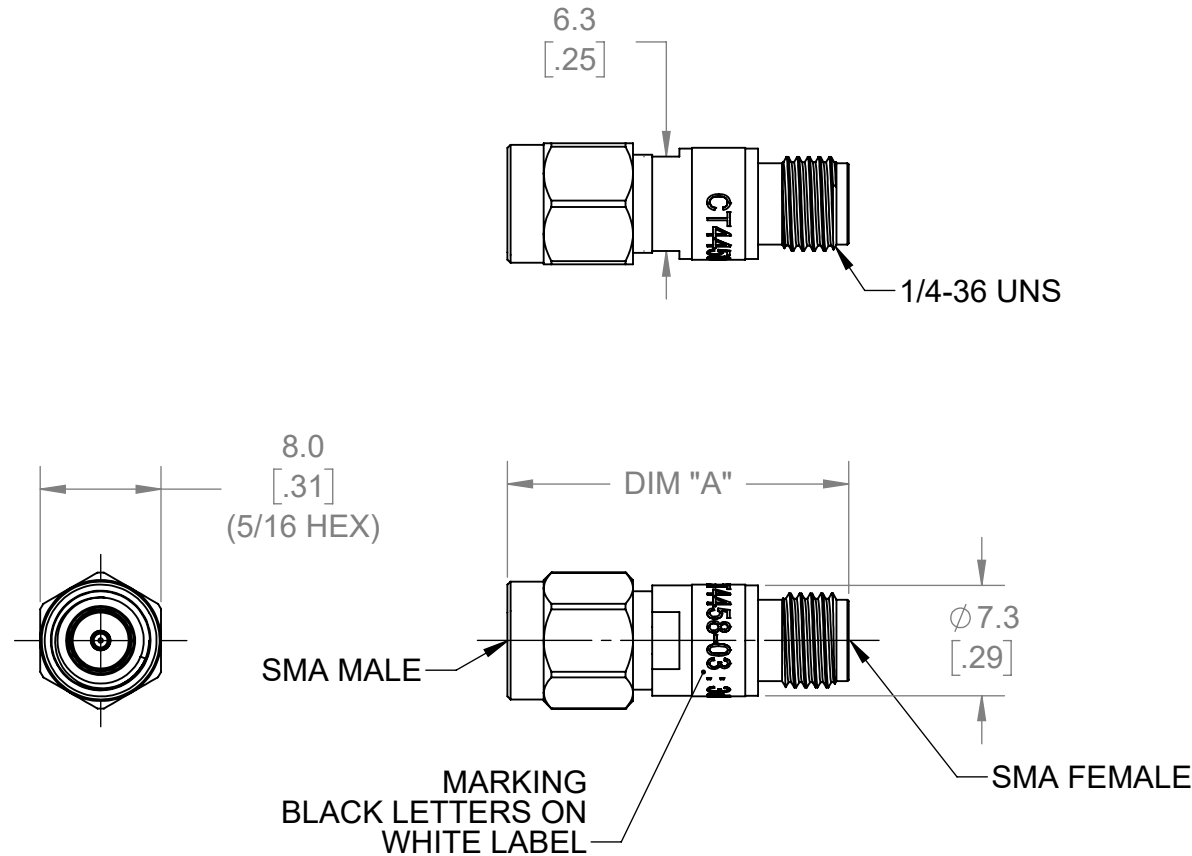

CT4458-30	30	1.0	27.0 [1.06]
CT4458-20	20	0.7	24.5 [0.96]
CT4458-10	10	0.5	22.5 [0.88]
CT4458-06	6	0.5	22.5 [0.88]
CT4458-03	3	0.5	22.5 [0.88]
MODEL NUMBER	ATTENUATION (dB)	ACCURACY (±dB)	DIMENSION "A"



ISOMETRIC VIEW
FULL SCALE

<h1>METRIC</h1>	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS TOLERANCES ARE: X.X = ±0.5 X.X* = ±0.5* X.XX = ±0.25 X.XXX = ±0.125 DO NOT SCALE DRAWING		PROJECT NO. A688		Cal Test Electronics 22820 Savi Ranch Parkway Yorba Linda, CA 92887	
	THIRD ANGLE PROJECTION	MATERIAL SEE NOTES	APPROVALS	DATE		
	TREATMENT SEE NOTES	CHECKER M. LEON	6/15/2021	ENGR. B. HANSEN	6/14/2021	SIZE B
	FINISH SEE NOTES	DESIGN ACTIVITY				
					DWG. NO. CT4458	REV. A
			SCALE 2:1		SHEET 1 OF 1	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Attenuators - Interconnects](#) category:

Click to view products by [Cal Test](#) manufacturer:

Other Similar products are found below :

[R414701000](#) [R411800121](#) [R413840115](#) [ATT-523F-05-SMA-02](#) [R413305000](#) [R411808121](#) [R412501124](#) [R414702000](#) [ATP8-10006KV](#)
[R414705000](#) [R411710124](#) [R410220121](#) [CT3369A-20](#) [09AS102-K40S3](#) [R411802000](#) [ATT-263F-03-SMA-02](#) [R417320130](#) [R412508124](#)
[R417030110](#) [ATT-523F-12-SMA-02](#) [ATT-263F-06-SMA-02](#) [ATT-0263-22-SMA-02](#) [ATT-263F-10-SMA-02](#) [ATT-523F-10-SMA-02](#)
[R422030020](#) [R422020030](#) [R417506130](#) [ATT-0263-25-SMA-02](#) [R413810000](#) [R411810124](#) [R413803000](#) [R417330110](#) [ATT-0290-02-HEX-](#)
[02](#) [R415603000](#) [R415620000](#) [R415606000](#) [R415610000](#) [ATT-0290-00-SMA-02](#) [AT-130V](#) [CATTEN-05R0-BNC](#) [CATTEN-04R0-BNC](#)
[6620_SMA-50-1/199_NE](#) [6630_SMA-50-2/199_NE](#) [CATTEN-06R0-BNC](#) [ATT-0294-02-SMA-02](#) [ATT-0298-06-HEX-02](#) [6610_SMA-50-](#)
[2/199_NE](#) [6605_SMA-50-1/199_NE](#) [6820.17.A](#) [6803.17.B](#)