


# CAMBLOCK PLUS

## 3.81mm Pitch Pluggable Screwless Terminal Block

PCB  
TERMINAL  
BLOCKS


- 2-12 pole solid block
- Screwless connectivity
- Pluggable male-female connectors
- Polarised mouldings
- 0.1 - 0.5mm<sup>2</sup> (26-21AWG) solid and stranded cable
- Moulded in green UL94-V0 flame retardant PA66
-  approved

### SPECIFICATION

Rating	UL=8A/300V, IEC=10A/250V
Insulation resistance	500MΩ/500V
Withstand voltage	AC2000V/1min
Contact resistance	20mΩ (max)
Working temperature	-40°C to +105°C
Mouldings	UL94-V0, flame retardant PA66
Spring	Stainless steel
Contact	Bronze, Ni plated

TYPE NO.	POLES	LENGTH
CSTBP92HE/2	2	8.41mm
CSTBP92HE/3	3	12.22mm
CSTBP92HE/4	4	16.03mm
CSTBP92HE/5	5	19.84mm
CSTBP92HE/6	6	23.65mm
CSTBP92HE/7	7	27.46mm
CSTBP92HE/8	8	31.27mm
CSTBP92HE/9	9	35.08mm
CSTBP92HE/10	10	38.89mm
CSTBP92HE/11	11	42.7mm
CSTBP92HE/12	12	46.51mm

CSTBP92HE

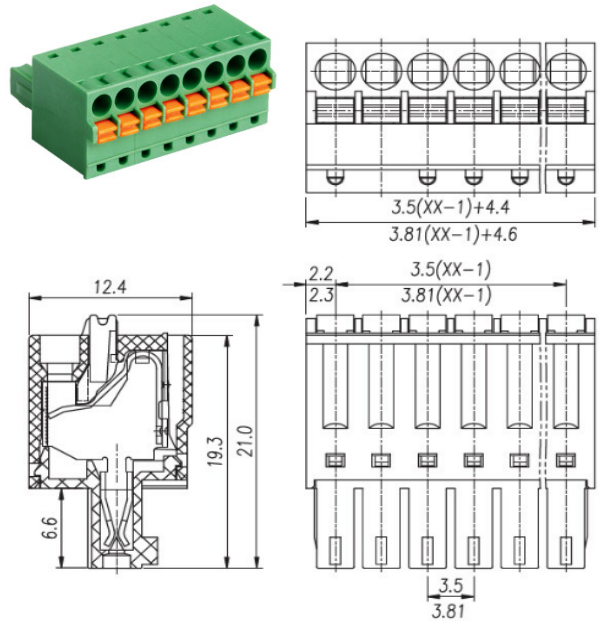

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Pluggable Terminal Blocks](#) category:*

*Click to view products by [CamdenBoss](#) manufacturer:*

Other Similar products are found below :

[57.510.0053](#) [MC 1.5/ 6-ST-3.5 GY AU](#) [ET02015000J0G](#) [860505](#) [860516](#) [860810](#) [GBPACX-12](#) [93.731.4953.0](#) [PV05-5,08-K](#) [PVP03-3,50](#)  
[PVS02-5,00](#) [1-1986160-3](#) [1377680000](#) [1531000000](#) [1546228-5](#) [ELFP03110](#) [ELFP10210](#) [ELFT07250](#) [ELVD12100](#) [ELVF09400](#)  
[ELVP03100](#) [ELXH071G0E](#) [1700410](#) [1746952](#) [1760336](#) [1809474](#) [1855000000](#) [19346](#) [1946309](#) [1950227](#) [1973592](#) [19892](#) [25.320.4053.1](#)  
[25.320.4553.9](#) [25.320.4753.1](#) [25.320.5453.1](#) [25.340.0353.1](#) [25.340.1053.1](#) [25.345.3553.0M001](#) [25.640.3553.1](#) [SH02-5,08](#) [SH06-3,81](#) [SH08-](#)  
[5,08](#) [SH08-5,08-K](#) [SH12-5,08](#) [SHS04-5,00](#) [30.303](#) [30.305](#) [30.306](#) [1719561](#)