

# 承認書

## SPECIFICATION FOR APPROVAL

客戶名稱  
CUSTOMER

客戶料號  
CUS. P/N

尺寸  
DIMENSION

**CRH10\*20\*6**

編號  
SERIAL NO.

NO. CF1025411268

日期  
DATE

2024年5月8日

出圖 DRAWING		
發行 ISSUE	復核 CHECKED	核準 APPROVAL
DATE: 2024/5/8		

承認 CUSTOMER APPROVAL



东莞市灿峰电子有限公司  
DONG GUAN CITY CAN FENG ELETRONICS CO., LTD

网址: www.canfengele.com E-mail: canfengdianzi@163.com

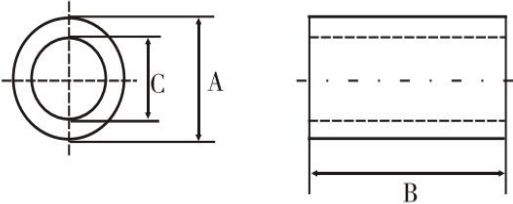
联系方式

王小姐: 13556646144

洪先生: 13809826886

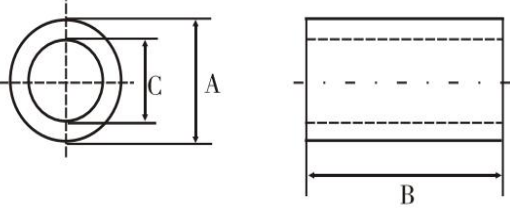
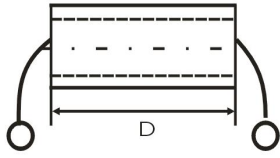
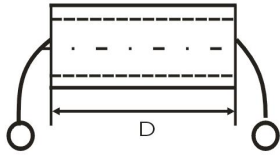


# 承認書

## SPECIFICATION FOR APPROVAL

規格 ITEM	CRH10*20*6		編號 SERIAL NO.	NO. CF1025411268	
1. 形狀尺寸 (單位mm) ; SHAPE & DIMENSION(unit/mm);  			A	10.00 ± 0.5	mm
			B	20.00 ± 0.5	mm
			C	6.50 ± 0.3	mm
			D		
			E		
			F		
			G		
			2. 電器性能檢測項目 ELECTTRONICAL REQUIREMENTS;		
<input type="checkbox"/> L		TEST FREQ		測試儀器 TESTING INSTRUMENTS	
<input type="checkbox"/> Q		TEST FREQ	KHZ MHZ	1. Q-METER: <input type="checkbox"/> HP-4342A <input type="checkbox"/> MQ-172	
<input checked="" type="checkbox"/> Z	Z1=40 Ω MIN 25MHZ	KHZ	Z3=	KHZ MHZ	2. LCR-METER: <input type="checkbox"/> TH2826
	Z2=80 Ω MIN 100MHZ	KHZ	Z4=	KHZ MHZ	3. IMPEDANCE ANALYZER: <input checked="" type="checkbox"/> E4991A <input checked="" type="checkbox"/> Agilent 16194A <input type="checkbox"/> TH2826
溫度 TEMP	25±5℃	濕度 HUMIDITY	60±8%		4. L-METER: <input type="checkbox"/> TH-2775B
繞線: WINDING	Z: Φ0.5*100L(mm)*0.5TS			5. DIGITAL MINI-OHM METER: VP2941A	
3. 外觀 THE LIMIT OF BREAKAGE:					
項目 Item			標準值 Standard Value		
一處缺陷的面积 Area of a breakage			≤1mm <sup>2</sup>		
总缺陷面积 ALL area of the breakage			≤2mm <sup>2</sup>		
缺陷深度 The depth of the breakage			≤0.4mm		
毛刺长度 The length of burr			≤0.2mm		
4. 包裝 PACKAGING:					
內包裝采用泡塑盒, 外包裝采用紙箱, 每箱產品外面都蓋上标签 (包括品名、數量、批號、檢驗員)。 Inner packing gdopts foam plastics box, outer packing adopts carton and each carton should have a qualified label outside(include the variey, quantity, batch number and inspector).					

# 檢 測 數 據

## INSPECTION DATA

規 格 ITEM		CRH10*20*6				編 號 SERIAL NO.		NO. CF1025411268					
1. 形狀尺寸(单位/毫米): SHAPE & DIMENSION(unit/mm):  						<input type="checkbox"/> L							
						<input type="checkbox"/> Q				KHZ MHZ			
						<input checked="" type="checkbox"/> Z		Z1=40 Ω MIN 25MHZ KHZ		Z1= KHZ MHZ			
								Z2=80 Ω MIN 100MHZ KHZ		Z4= KHZ MHZ			
						溫 度 TEMP		25±5°C		濕 度 HUMIDITY		60±8%	
						繞 线: WINDING		Z: Φ 0.5*100L(mm)*0.5TS					
項 目 ITEM	电 气 性 能 ELECTRONIC CHARACTERISTICS						尺 寸 DIMENSION(unit:mm)						
	Q	L(μH)	Z1(Ω)	Z2(Ω)	Z3(Ω)	Z4(Ω)	A	B	C	D	E	F	
			40	80			10	20	6.5		0		
+			/	/			0.5	0.5	0.3				
-			0	0			0.5	0.5	0.3				
1			60.8	99.2			9.99	20.06	6.51				
2			60.2	104.0			9.96	20.02	6.52				
3			60.8	102.4			9.84	20.08	6.51				
4			63.2	100.8			9.87	20.26	6.53				
5			68.1	99.4			9.85	20.00	6.49				
6			62.4	102.1			9.86	20.28	6.48				
7			64.0	99.5			10.02	20.04	6.53				
8			62.0	100.4			9.87	20.10	6.53				
9			61.1	103.1			9.94	20.14	6.49				
10			63.2	99.2			10.01	20.22	6.50				
X			62.6	101.0			9.92	20.12	6.51				
Y/N			Y	Y			Y	Y	Y				
2. 測試儀器 TESTING INSTRUMENTS E4991+16194A  						檢 測 INSPECTION		復 核 CHECK		確 認 APPROVAL			
													

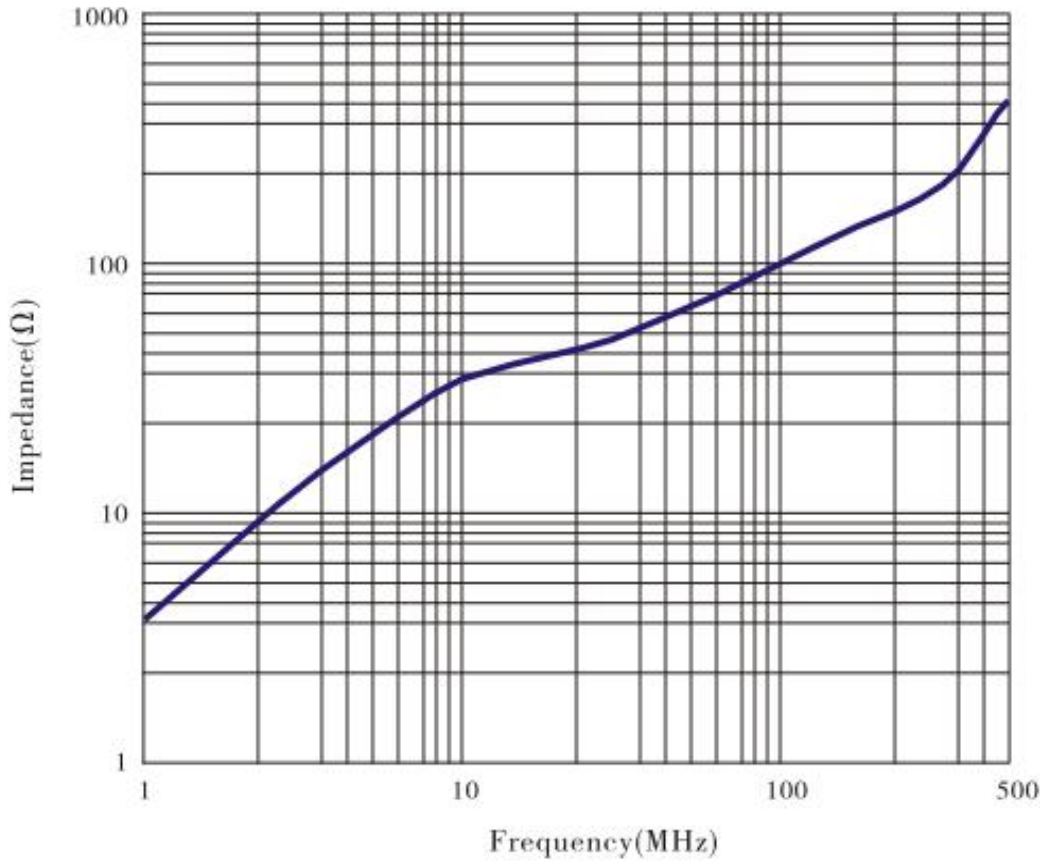
# 阻抗 - 頻率曲綫

IMPEDANCE V.S.FREQUENCY ( Z-Y )

規格 ITEM	CRH10*20*6	編號 SERIAL NO.	NO. CF1025411268
------------	------------	------------------	------------------

材质特性：  
MATERIAL CHARACTERISTICS

材料 牌号 Material	初始磁 导率 Initial Permeability	比损耗因子 Relative Loss Factor	比温度系数 Relative Temperature Coefficient	饱和磁通密度 Saturation Magnetic Flux Density	剩磁 Reman- ence	矫顽力 Coercivi- ty	居里温度 Curie Tempera- ture	电阻率 Electric Resistiv- ity	使用范围 Applied Frequenc- y Range	密度 Densit- y
Unit symbol	$\mu_i$ $\pm 20\%$	$\tan \delta / \mu_i$ $\times 10^{-6}$	$\alpha \mu_i \gamma$ $\times 10^{-6}$	Bs (MT)	Br (MT)	HC (A/m)	Tc (°C)	$\rho$ ( $\Omega \cdot m$ )	F Mhz	d g/cm <sup>3</sup>
F2	650	20(0.1MHz)	2-5	330(1600A/m)	150	35	>110	>10 <sup>5</sup>	0.1-1.5	5



测试条件； TESTING CONDITION;	檢 測 INSPECTION	復 核 CHECK	确 認 APPROVAL
1. 测试仪器： E4991 A+16194 A Testing Equipment:			
2. 测试频率区间： 1MHZ-500MHZ Testing Frequency Range:			
3. 测试绕组： $\Phi 0.5 \times 100L(mm) \times 0.5TS$ Testing Coil Specification:			

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [canfeng manufacturer](#):*

Other Similar products are found below :

[CD-20x10x10c](#) [CD-50x25x20](#) [CF2-10x4x6](#) [CF2-30x20x10](#) [CF2-32x20x10](#) [CF2-40x25x15](#) [CF2-50x32x20-100](#) [CF2-59\\*40\\*20](#) [CF2-80x50x25](#) [CF6N 14.2x28.5x6.35](#) [CFN40-26\\*9\\*20.6\\*17.5-2.6](#) [CFS2-14x8x10x15-4](#) [CFS9-19x6.5x14x12-1.8](#) [CFS9-23.5x6.5x15x19.5-1.4](#) [CFS9-23.5x6.5x19.5x15-1.8](#) [CFS9-23.8x6.3x19.5X15-1.8](#) [CFS9-25x5x21x12-1.4](#) [CFS9-25x5x21x15-1.5](#) [CFS9-28X13X20X11-7.2](#) [CFS9-28x22x12x8-2](#) [CFS9-28x7.7x23x12-2.4](#) [CFS9-29x10x8x22-2.4](#) [CFS9-33.5x12x6.5-1.8](#) [CFS9-33.5x12x6.8-1.8](#) [CFS9-36\\*9.4\\*28\\*14.8-2.0](#) [CFS9-40x6.5x35x12-1.8](#) [CFS9-49.6x6.5x43x12-1.4](#) [CFS9-57.2x6.5x51.6x12-1.2](#) [CFS9-57.2x6.5x51.6x18-1.2](#) [CFS9-7.5x5.5x5.3x11.5-3.3](#) [CN65-40.5x15x27.4](#) [CNF-100](#) [CNF-130A](#) [CNF-50A](#) [CNF-65](#) [CRH10\\*20\\*6.5](#) [CRH-10.4x10.4x5.8](#) [CRH-10.5\\*12.5\\*7.2](#) [CRH-10.5x15x5.5](#) [CRH-10.5x20x5.5](#) [CRH-10.5X20X6.5](#) [CRH-10.5x20x7.3](#) [CRH-10x14x6](#) [CRH-10x20x5.5](#) [CRH-11.5x25x5](#) [CRH-12.5x20x8](#) [CRH-12x15x6.5](#) [CRH-12x15x7.2](#) [CRH-12x16x8](#) [CRH12x20x5.6](#)