

承認書

SPECIFICATION FOR APPROVAL

客戶名稱
CUSTOMER

客戶料號
CUS. P/N

尺寸
DIMENSION




CRH-14.2x28.5x7.2

編號
SERIAL NO.

NO.1025657127

日期
DATE

2024年5月6日

出圖 DRAWING		
發行 ISSUE	復核 CHECKED	核準 APPROVAL
		
DATE: 2024/5/6		

承認 CUSTOMER APPROVAL



东莞市灿峰电子有限公司

DONG GUAN CITY CAN FENG ELETRONICS CO., LTD

网址: www.canfengele.com E-mail: canfengdianzi@163.com

联系方式

王小姐: 13556646144

洪先生: 13809826886

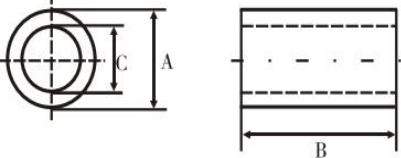
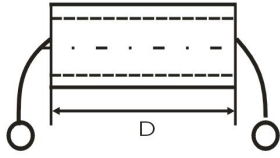



承認書

SPECIFICATION FOR APPROVAL

規格 ITEM	CRH-14.2x28.5x7.2		編號 SERIAL NO.	NO.1025657127	
1. 形狀尺寸 (單位mm) ; SHAPE & DIMENSION(unit/mm); 			A	14.20 ± 0.5	mm
			B	28.50 ± 0.7	mm
			C	7.20 ± 0.4	mm
			D		
			E		
			F		
			G		
			2. 電器性能檢測項目 ELECTTRONICAL REQUIREMENTS;		
<input type="checkbox"/> L		TEST FREQ		測試儀器 TESTING INSTRUMENTS	
<input type="checkbox"/> Q		TEST FREQ	KHZ MHZ	1. Q-METER: <input type="checkbox"/> HP-4342A <input type="checkbox"/> MQ-172	
<input checked="" type="checkbox"/> Z	Z1=90 Ω MIN 25MHZ	KHZ	Z3=	KHZ MHZ	2. LCR-METER: <input type="checkbox"/> TH2826
	Z2=180 Ω MIN 100MHZ	KHZ	Z4=	KHZ MHZ	3. IMPEDANCE ANALYZER: <input checked="" type="checkbox"/> HP-4191A <input type="checkbox"/> Agilent 16092A <input type="checkbox"/> TH2826
溫度 TEMP	25±5℃	濕度 HUMIDITY	60±8%	4. L-METER: <input type="checkbox"/> TH-2775B	
繞線: WINDING	Z: Φ0.5*100L(mm)*0.5TS			5. DIGITAL MINI-OHM METER: VP2941A	
3. 外觀 THE LIMIT OF BREAKACE:					
項目 Item			標準值 Standard Value		
一處缺陷的面积 Area of a breakage			≤1mm ²		
总缺陷面积 ALL area of the breakage			≤2mm ²		
缺陷深度 The depth of the breakge			≤0.4mm		
毛刺长度 The length of burr			≤0.2mm		
4. 包裝 PACKAGING:					
內包裝采用泡塑盒，外包裝采用紙箱，每箱產品外面都蓋上标签（包括品名、數量、批號、檢驗員）。 Inner packing gdopts foam plastics box,outer packing adopts carton and each carton should have a qualified label outside(include the variey,quantity,batch number and inspector).					

檢 測 數 據

INSPECTION DATA

規 格 ITEM	CRH-14.2x28.5x7.2					編 號 SERIAL NO.	NO.1025657127					
1. 形壯尺寸(单位/毫米): SHAPE & DIMENSION(unit/mm): = 	<input type="checkbox"/> L											
	<input type="checkbox"/> Q										KHZ MHZ	
	<input checked="" type="checkbox"/> Z		Z1=90 Ω MIN KHZ 25MHZ		Z1= KHZ MHZ							
			Z2=180 Ω MIN KHZ 100MHZ		Z4= KHZ MHZ							
	溫 度 TEMP		25±5°C		濕 度 HUMIDITY		60±8%					
	繞 线: WINDING		Z: Φ 0.5*100L(mm)*0.5TS									
項 目 ITEM	电 气 性 能 ELECTRONIC CHARACTERISTICS						尺 寸 DIMENSION(unit:mm)					
	Q	L(μH)	Z1(Ω)	Z2(Ω)	Z3(Ω)	Z4(Ω)	A	B	C	D	E	F
			90	180			14.2	28.5	7.2			
+			/	/			0.5	0.7	0.4			
-			0	0			0.5	0.7	0.4			
1			127.8	219.6			14.19	28.59	7.21			
2			128.1	211.3			14.14	28.53	7.22			
3			129.6	212.4			14.23	28.61	7.21			
4			131.6	208.8			14.17	28.87	7.24			
5			134.5	199.8			14.14	28.50	7.19			
6			127.9	212.4			14.26	28.90	7.18			
7			135.6	205.2			14.23	28.56	7.24			
8			138.7	221.4			14.26	28.64	7.24			
9			125.0	215.5			14.23	28.70	7.19			
10			97.2	223.8			14.21	28.81	7.20			
X			127.6	213.0			14.21	28.67	7.21			
Y/N			Y	Y			Y	Y	Y			
2. 測試儀器 TESTING INSTRUMENTS HP4191A+16092A 							檢 測 INSPECTION		復 核 CHECK		確 認 APPROVAL	
												

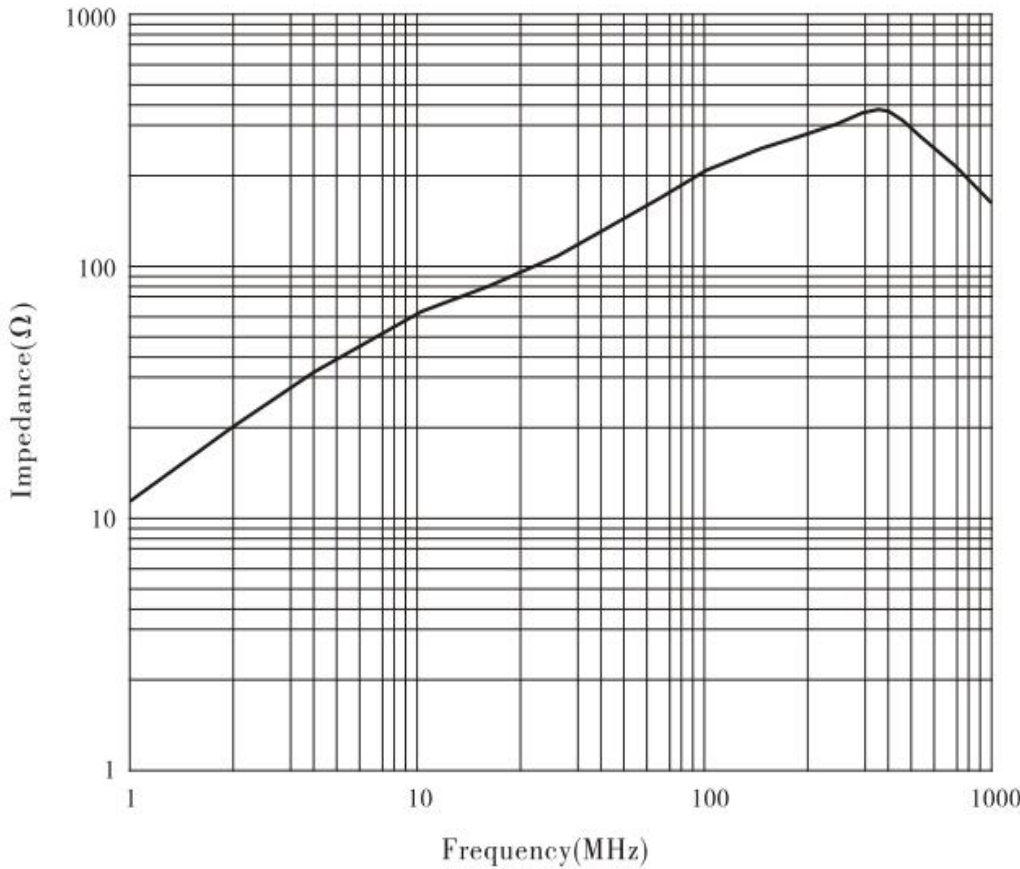
阻抗 - 頻率曲綫




IMPEDANCE V.S.FREQUENCY (Z-Y)

規格 ITEM	CRH-14. 2x28. 5x7. 2	編號 SERIAL NO.	NO.1025657127
------------	----------------------	------------------	---------------

材质特性：
MATERIAL CHARACTERISTICS

材料 牌号 Material	初始磁 导率 Initial Permeability	比损耗因子 Relative Loss Factor	比温度系数 Relative Temperature Coefficient	饱和磁通密度 Saturation Magnetic Flux Density	剩磁 Reman- ence	矫顽力 Coercivi- ty	居里温度 Curie Tempera- ture	电阻率 Electric Resistiv- ity	使用范围 Applied Frequenc- y Range	密度 Densit- y
Unit symbol	μ_i $\pm 20\%$	$\tan \delta / \mu_i$ $\times 10^{-6}$	$\alpha \mu_i \gamma$ $\times 10^{-6}$	Bs (MT)	Br (MT)	HC (A/m)	Tc (°C)	ρ ($\Omega \cdot m$)	F Mhz	d g/cm ³
F9	850	16(0.1MHz)	5-10	350(1600A/m)	200	20	>110	>10 ⁵	0.1-1.5	4.9



测试条件； TESTING CONDITION;	檢 測 INSPECTION	復 核 CHECK	确 認 APPROVAL
1. 测试仪器： HP 4191 A+16092 A Testing Equipment:			
2. 测试频率区间： 1MHZ-1000MHZ Testing Frequency Range:			
3. 测试绕组： Φ0.5*100L(mm)*0.5TS Testing Coil Specification:			

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [canfeng manufacturer](#):

Other Similar products are found below :

[CD-20x10x10c](#) [CD-50x25x20](#) [CF2-10x4x6](#) [CF2-30x20x10](#) [CF2-32x20x10](#) [CF2-40x25x15](#) [CF2-50x32x20-100](#) [CF2-59*40*20](#) [CF2-80x50x25](#) [CF6N 14.2x28.5x6.35](#) [CFN40-26*9*20.6*17.5-2.6](#) [CFS2-14x8x10x15-4](#) [CFS9-19x6.5x14x12-1.8](#) [CFS9-23.5x6.5x15x19.5-1.4](#) [CFS9-23.5x6.5x19.5x15-1.8](#) [CFS9-23.8x6.3x19.5X15-1.8](#) [CFS9-25x5x21x12-1.4](#) [CFS9-25x5x21x15-1.5](#) [CFS9-28X13X20X11-7.2](#) [CFS9-28x22x12x8-2](#) [CFS9-28x7.7x23x12-2.4](#) [CFS9-29x10x8x22-2.4](#) [CFS9-33.5x12x6.5-1.8](#) [CFS9-33.5x12x6.8-1.8](#) [CFS9-36*9.4*28*14.8-2.0](#) [CFS9-40x6.5x35x12-1.8](#) [CFS9-49.6x6.5x43x12-1.4](#) [CFS9-57.2x6.5x51.6x12-1.2](#) [CFS9-57.2x6.5x51.6x18-1.2](#) [CFS9-7.5x5.5x5.3x11.5-3.3](#) [CN65-40.5x15x27.4](#) [CNF-100](#) [CNF-130A](#) [CNF-50A](#) [CNF-65](#) [CRH10*20*6.5](#) [CRH-10.4x10.4x5.8](#) [CRH-10.5*12.5*7.2](#) [CRH-10.5x15x5.5](#) [CRH-10.5x20x5.5](#) [CRH-10.5X20X6.5](#) [CRH-10.5x20x7.3](#) [CRH-10x14x6](#) [CRH-10x20x5.5](#) [CRH-11.5x25x5](#) [CRH-12.5x20x8](#) [CRH-12x15x6.5](#) [CRH-12x15x7.2](#) [CRH-12x16x8](#) [CRH12x20x5.6](#)