

# 承認書

## SPECIFICATION FOR APPROVAL

客户名稱  
CUSTOMER

客户料号  
CUS. P/N

尺寸  
DIMENSION **CRH-21.2x28.5x12.7**

編號  
SERIAL NO. **NO. CF1025657141**

日期  
DATE **2024年5月6日**

出圖 DRAWING		
發行 ISSUE	復核 CHECKED	核準 APPROVAL
DATE: 2024/5/6		

承認 CUSTOMER APPROVAL



东莞市灿峰电子有限公司  
DONG GUAN CITY CAN FENG ELETRONICS CO., LTD

网址: www.canfengele.com E-mail: canfengdianzi@163.com

联系方式

王小姐: 13556646144  
洪先生: 13809826886

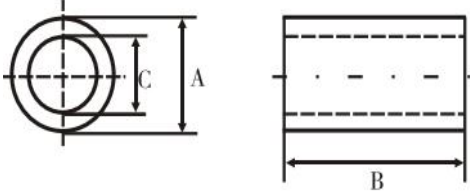
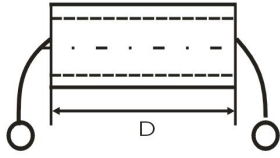



# 承認書

## SPECIFICATION FOR APPROVAL

規格 ITEM	CRH-21.2x28.5x12.7		編號 SERIAL NO.	NO. CF1025657141	
1. 形狀尺寸 (單位mm) ; SHAPE & DIMENSION(unit/mm);  			A	21.20 ± 0.7      mm	
			B	28.50 ± 1      mm	
			C	12.70 ± 0.6      mm	
			D		
			E		
			F		
			G		
			2. 電器性能檢測項目 ELECTTRONICAL REQUIREMENTS;		
<input type="checkbox"/> L		TEST FREQ	測試儀器 TESTING INSTRUMENTS		
<input type="checkbox"/> Q		TEST FREQ	KHZ MHZ	1. Q-METER: <input type="checkbox"/> HP-4342A <input type="checkbox"/> MQ-172	
<input checked="" type="checkbox"/> Z	Z1=60 Ω MIN 25MHZ	KHZ	Z3=	KHZ MHZ	2. LCR-METER: <input type="checkbox"/> TH2826
	Z2=150 Ω MIN 100MHZ	KHZ	Z4=	KHZ MHZ	3. IMPEDANCE ANALYZER: <input checked="" type="checkbox"/> HP-4191A <input type="checkbox"/> Agilent 16092A <input type="checkbox"/> TH2826
溫度 TEMP	25±5℃	濕度 HUMIDITY	60±8%	4. L-METER: <input type="checkbox"/> TH-2775B	
繞線: WINDING	Z: Φ0.5*100L(mm)*0.5TS			5. DIGITAL MINI-OHM METER: VP2941A	
3. 外觀 THE LIMIT OF BREAKACE:					
項目 Item			標準值 Standard Value		
一處缺陷的面积 Area of a breakage			≤1mm <sup>2</sup>		
总缺陷面积 ALL area of the breakage			≤2mm <sup>2</sup>		
缺陷深度 The depth of the breakge			≤0.4mm		
毛刺长度 The length of burr			≤0.2mm		
4. 包裝 PACKAGING:  內包裝采用泡塑盒, 外包裝采用紙箱, 每箱產品外面都蓋上标签 (包括品名、數量、批號、檢驗員)。 Inner packing gdopts foam plastics box, outer packing adopts carton and each carton should have a qualified label outside(include the variey, quantity, batch number and inspector).					

# 檢 測 數 據

## INSPECTION DATA

規 格 ITEM	CRH-21.2x28.5x12.7					編 號 SERIAL NO.	NO. CF1025657141					
1. 形壯尺寸(单位/毫米): SHAPE & DIMENSION(unit/mm): =  	<input type="checkbox"/> L											
	<input type="checkbox"/> Q										KHZ MHZ	
	<input checked="" type="checkbox"/> Z		Z1=60 Ω MIN 25MHZ KHZ		Z1=		KHZ MHZ					
			Z2=150 Ω MIN 100MHZ KHZ		Z4=		KHZ MHZ					
	溫 度 TEMP		25±5°C		濕 度 HUMIDITY		60±8%					
	繞 線: WINDING		Z: Φ 0.5*100L(mm)*0.5TS									
項 目 ITEM	电 气 性 能 ELECTRONIC CHARACTERISTICS						尺 寸 DIMENSION(unit:mm)					
	Q	L(μH)	Z1(Ω)	Z2(Ω)	Z3(Ω)	Z4(Ω)	A	B	C	D	E	F
			60	150			21.2	28.5	12.7			
+			/	/			0.7	1	0.6			
-			0	0			0.7	1	0.6			
1			91.8	234.0			21.18	28.59	12.73			
2			90.9	249.0			21.12	28.53	12.74			
3			91.6	246.0			21.24	28.61	12.71			
4			89.7	238.5			21.16	28.87	12.76			
5			91.9	243.0			21.12	28.50	12.69			
6			89.9	228.5			21.28	28.90	12.66			
7			91.0	242.8			21.24	28.56	12.76			
8			93.6	242.5			21.28	28.64	12.76			
9			93.0	245.7			21.24	28.70	12.69			
10			91.8	251.9			21.22	28.81	12.70			
X			91.5	242.2			21.21	28.67	12.72			
Y/N			Y	Y			Y	Y	Y			
2. 測試儀器 TESTING INSTRUMENTS HP4191A  							檢 測 INSPECTION		復 核 CHECK		確 認 APPROVAL	
												

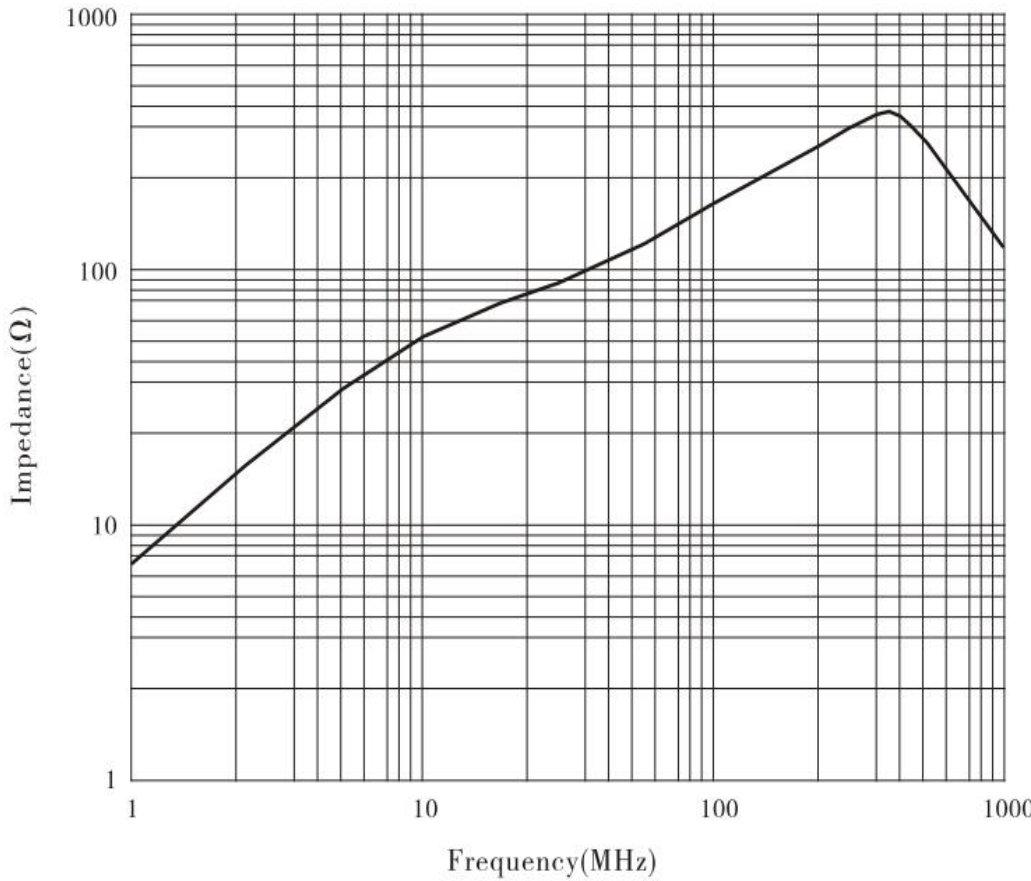
# 阻抗 - 频率曲线

IMPEDANCE V.S.FREQUENCY (Z-Y)

规格 ITEM	CRH-21. 2x28. 5x12. 7	编号 SERIAL NO.	NO. CF1025657141
------------	-----------------------	------------------	------------------

材质特性：  
MATERIAL CHARACTERISTICS

材料 牌号 Material	初始磁 导率 Initial Permeability	比损耗因子 Relative Loss Factor	比温度系数 Relative Temperature Coefficient	饱和磁通密度 Saturation Magnetic Flux Density	剩磁 Reman- ence	矫顽力 Coercivi- ty	居里温度 Curie Tempera- ture	电阻率 Electric Resistiv- ity	使用范围 Applied Frequenc y Range	密度 Densit y
Unit symbol	$\mu_i$ $\pm 20\%$	$\tan \delta / \mu_i$ $\times 10^{-6}$	$\alpha \mu_i \gamma$ $\times 10^{-6}$	Bs (MT)	Br (MT)	HC (A/m)	Tc (°C)	$\rho$ ( $\Omega \cdot m$ )	F Mhz	d g/cm <sup>3</sup>
F2	650	20(0.1MHz)	2-5	330(1600A/m)	150	35	>110	>10 <sup>5</sup>	0.1-1.5	5



测试条件； TESTING CONDITION;	检测 INSPECTION	复核 CHECK	确认 APPROVAL
1. 测试仪器： HP 4191 A Testing Equipment:			
2. 测试频率区间： 1MHZ-1000MHZ Testing Frequency Range:			
3. 测试绕组： Φ0.5*100L(mm)*0.5TS Testing Coil Specification:			

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [canfeng manufacturer](#):*

Other Similar products are found below :

[CSR9-170B](#) [CUF9-230C](#) [CSR9-200D](#) [CSR9-160B](#) [CUF9-250D](#) [CSR9-190C](#) [CUF9-300D](#) [CFS9-36\\*9.4\\*28\\*14.8-2.0](#) [CNF-50A](#) [CRH-16x50.8x8](#) [CFN40-26\\*9\\*20.6\\*17.5-2.6](#) [CF2-40x25x15](#) [CF2-80x50x25](#) [CF2-50x32x20-100](#) [CF2-59\\*40\\*20](#) [CD-20x10x10c](#) [CT2-26x28.5x13](#) [CN65-40.5x15x27.4](#) [CT2-36x15x23](#) [CSR9-130B](#) [CD-50x25x20](#) [CF2-32x20x10](#) [CRH-16x28x10](#) [CT2-28x28x16](#) [CF2-30x20x10](#) [CT9-16x8x9](#) [CRH-22.5x29x13.8](#) [CRH-14.2x20x9.5](#) [CT2-36x23x13](#) [CSR9-25x12x15](#) [CNF-100](#) [CT2-18x8x10](#) [CT2-25x8x15](#) [CT2-16x10x10](#) [CRH-14x15x7.2](#) [CRH-15x12x10.5](#) [CRH-22x24x15](#) [CNF-130A](#) [CSR9-80A](#) [CT9-25x20x15](#) [CRH17.5x28.5x11.5](#) [CRH17.5x28.5x10.5](#) [CT2-22.5x8x13.8](#) [CRH-22x20x15](#) [CRH14.2x28.5x9](#) [CFS9-28X13X20X11-7.2](#) [CRH-14.2x28.5x4.5](#) [CT2-22x8x14](#) [CNF-65](#) [CT2-28x13x16](#)