

承認書

SPECIFICATION FOR APPROVAL

客户名稱
CUSTOMER

客户料号
CUS. P/N

尺寸
DIMENSION **CRH-7.8x12.7x4.5**

編號
SERIAL NO. **NO. CF1025657168**

日期
DATE **2024年5月6日**

出圖 DRAWING		
發行 ISSUE	復核 CHECKED	核準 APPROVAL
DATE: 2024/5/6		

承認 CUSTOMER APPROVAL



东莞市灿峰电子有限公司

DONG GUAN CITY CAN FENG ELETRONICS CO., LTD

网址: www.canfengele.com E-mail: canfengdianzi@163.com

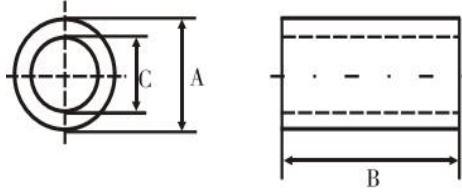
联系方式

王小姐: 13556646144

洪先生: 13809826886

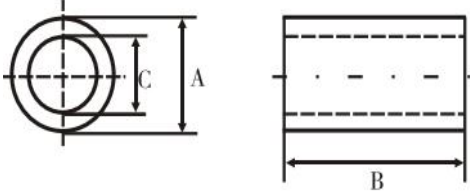
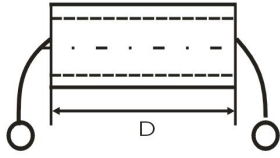



承認書

SPECIFICATION FOR APPROVAL

規格 ITEM	CRH-7.8x12.7x4.5		編號 SERIAL NO.	NO. CF1025657168	
1. 形狀尺寸 (單位mm) ; SHAPE & DIMENSION(unit/mm); 			A	7.80 ± 0.3 mm	
			B	12.70 ± 0.5 mm	
			C	4.50 ± 0.3 mm	
			D		
			E		
			F		
			G		
			2. 電器性能檢測項目 ELECTTRONICAL REQUIREMENTS;		
<input type="checkbox"/> L		TEST FREQ	測試儀器 TESTING INSTRUMENTS		
<input type="checkbox"/> Q		TEST FREQ	KHZ MHZ	1. Q-METER: <input type="checkbox"/> HP-4342A <input type="checkbox"/> MQ-172	
<input checked="" type="checkbox"/> Z	Z1=35 Ω MIN 25MHZ	KHZ	Z3=	KHZ MHZ	2. LCR-METER: <input type="checkbox"/> TH2826
	Z2=90 Ω MIN 100MHZ	KHZ	Z4=	KHZ MHZ	3. IMPEDANCE ANALYZER: <input type="checkbox"/> HP-4191A <input checked="" type="checkbox"/> Agilent 16092A <input checked="" type="checkbox"/> HP 4396B
溫度 TEMP	25±5℃	濕度 HUMIDITY	60±8%	4. L-METER: <input type="checkbox"/> TH-2775B	
繞線: WINDING	Z: Φ0.5*100L(mm)*0.5TS			5. DIGITAL MINI-OHM METER: VP2941A	
3. 外觀 THE LIMIT OF BREAKAGE:					
項目 Item			標準值 Standard Value		
一處缺陷的面积 Area of a breakage			≤1mm ²		
总缺陷面积 ALL area of the breakage			≤2mm ²		
缺陷深度 The depth of the breakge			≤0.4mm		
毛刺长度 The length of burr			≤0.2mm		
4. 包裝 PACKAGING: 內包裝采用泡塑盒, 外包裝采用紙箱, 每箱產品外面都蓋上标签 (包括品名、數量、批號、檢驗員)。 Inner packing gdopts foam plastics box, outer packing adopts carton and each carton should have a qualified label outside(include the variey, quantity, batch number and inspector).					

檢 測 數 據

INSPECTION DATA

規 格 ITEM	CRH-7.8x12.7x4.5					編 號 SERIAL NO.	NO. CF1025657168					
1. 形壯尺寸(单位/毫米): SHAPE & DIMENSION(unit/mm): = 							<input type="checkbox"/> L					
							<input type="checkbox"/> Q					KHZ MHZ
							<input checked="" type="checkbox"/> Z	Z1=35 Ω MIN	KHZ	Z1=	KHZ	
								Z2=90 Ω MIN	KHZ	Z4=	KHZ	
							溫 度 TEMP	25±5°C	濕 度 HUMIDITY	60±8%		
							绕 线: WINDING	Z: Φ 0.5*100L(mm)*0.5TS				
項 目 ITEM	电 气 性 能 ELECTRONIC CHARACTERISTICS						尺 寸 DIMENSION(unit:mm)					
	Q	L(μH)	Z1(Ω)	Z2(Ω)	Z3(Ω)	Z4(Ω)	A	B	C	D	E	F
+			35	90			7.8	12.7	4.5			
-			/	/			0.3	0.5	0.3			
—			0	0			0.3	0.5	0.3			
1			54.7	131.4			7.79	12.74	4.51			
2			53.6	133.2			7.77	12.71	4.51			
3			54.6	129.6			7.82	12.75	4.50			
4			52.9	134.1			7.78	12.87	4.52			
5			54.8	127.8			7.77	12.70	4.50			
6			53.0	128.1			7.83	12.88	4.49			
7			54.7	127.9			7.82	12.73	4.52			
8			52.2	127.5			7.83	12.76	4.52			
9			55.0	138.1			7.82	12.79	4.50			
10			54.3	134.8			7.81	12.84	4.50			
X			54.0	131.3			7.80	12.78	4.51			
Y/N			Y	Y			Y	Y	Y			
2. 測試儀器 TESTING INSTRUMENTS HP4396B+16092A 							檢 測 INSPECTION	復 核 CHECK	確 認 APPROVAL			
												

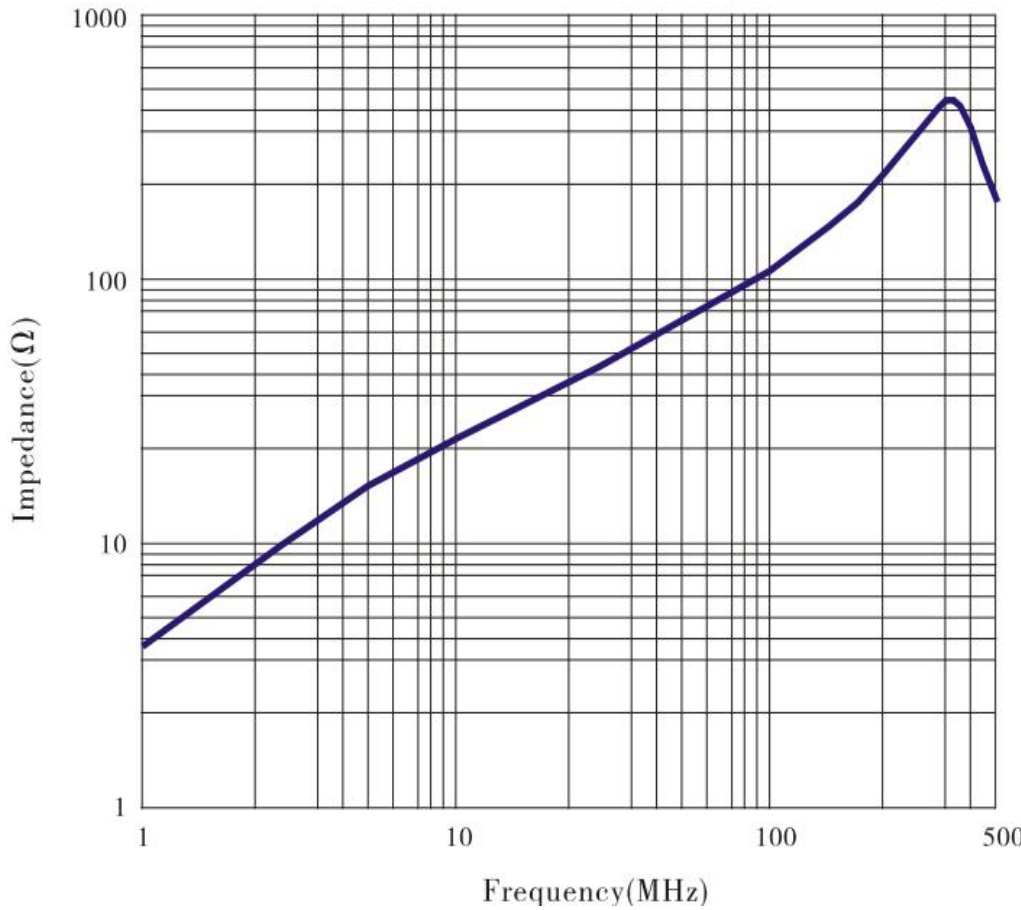
阻抗 - 頻率曲綫

IMPEDANCE V.S.FREQUENCY (Z-Y)

規格 ITEM	CRH-7. 8x12. 7x4. 5	編號 SERIAL NO.	NO. CF1025657168
------------	---------------------	------------------	------------------

材质特性：
MATERIAL CHARACTERISTICS

材料 牌号 Material	初始磁 导率 Initial Permeability	比损耗因子 Relative Loss Factor	比温度系数 Relative Temperature Coefficient	饱和磁通密度 Saturation Magnetic Flux Density	剩磁 Reman- ence	矫顽力 Coercivi- ty	居里温度 Curie Tempera- ture	电阻率 Electric Resistiv- ity	使用范围 Applied Frequenc y Range	密度 Densit y
Unit symbol	μ i $\pm 20\%$	$\tan \delta / \mu$ i $\times 10^{-6}$	$\alpha \mu$ i γ $\times 10^{-6}$	Bs (MT)	Br (MT)	HC (A/m)	Tc (°C)	ρ ($\Omega \cdot m$)	F Mhz	d g/cm ³
F2	650	20(0.1MHz)	2-5	330(1600A/m)	150	35	>110	>10 ⁵	0.1-1.5	5



测试条件； TESTING CONDITION;	檢 測 INSPECTION	復 核 CHECK	确 認 APPROVAL
1. 测试仪器： HP4396B+16092A Testing Equipment:			
2. 测试频率区间： 1MHZ-500MHZ Testing Frequency Range:			
3. 测试绕组： Φ0.5*100L(mm)*0.5TS Testing Coil Specification:			

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [canfeng manufacturer](#):

Other Similar products are found below :

[CSR9-170B](#) [CUF9-230C](#) [CSR9-200D](#) [CSR9-160B](#) [CUF9-250D](#) [CSR9-190C](#) [CUF9-300D](#) [CFS9-36*9.4*28*14.8-2.0](#) [CNF-50A](#) [CRH-16x50.8x8](#) [CFN40-26*9*20.6*17.5-2.6](#) [CF2-40x25x15](#) [CF2-80x50x25](#) [CF2-50x32x20-100](#) [CF2-59*40*20](#) [CD-20x10x10c](#) [CT2-26x28.5x13](#) [CN65-40.5x15x27.4](#) [CT2-36x15x23](#) [CSR9-130B](#) [CD-50x25x20](#) [CF2-32x20x10](#) [CRH-16x28x10](#) [CT2-28x28x16](#) [CF2-30x20x10](#) [CT9-16x8x9](#) [CRH-22.5x29x13.8](#) [CRH-14.2x20x9.5](#) [CT2-36x23x13](#) [CSR9-25x12x15](#) [CNF-100](#) [CT2-18x8x10](#) [CT2-25x8x15](#) [CT2-16x10x10](#) [CRH-14x15x7.2](#) [CRH-15x12x10.5](#) [CRH-22x24x15](#) [CNF-130A](#) [CSR9-80A](#) [CT9-25x20x15](#) [CRH17.5x28.5x11.5](#) [CRH17.5x28.5x10.5](#) [CT2-22.5x8x13.8](#) [CRH-22x20x15](#) [CRH14.2x28.5x9](#) [CFS9-28X13X20X11-7.2](#) [CRH-14.2x28.5x4.5](#) [CT2-22x8x14](#) [CNF-65](#) [CT2-28x13x16](#)