

承認書

SPECIFICATION FOR APPROVAL




客户名稱
CUSTOMER

客户料号
CUS. P/N

尺寸
DIMENSION **CT2-10x10x6.2**

編號
SERIAL NO. **NO.1026132117**

日期
DATE **2024年5月6日**

出圖 DRAWING		
發行 ISSUE	復核 CHECKED	核準 APPROVAL
		
DATE: 2024/5/6		

承認 CUSTOMER APPROVAL

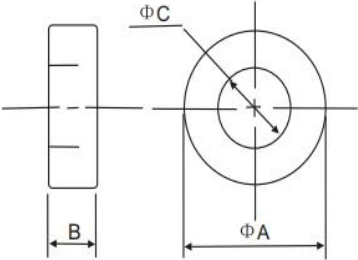


东莞市灿峰电子有限公司
DONG GUAN CITY CAN FENG ELETRONICS CO., LTD
网址: www.canfengele.com E-mail: canfengdianzi@163.com

联系方式
王小姐: 13556646144
洪先生: 13809826886

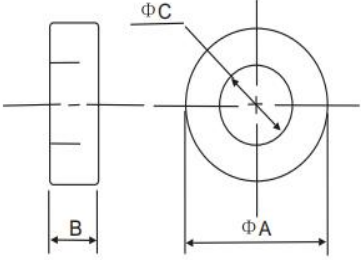
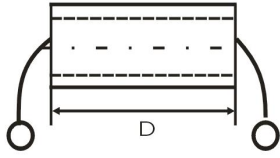



承認書

SPECIFICATION FOR APPROVAL

規格 ITEM	CT2-10x10x6.2		編號 SERIAL NO.	NO.1026132117	
1. 形狀尺寸 (單位mm) ; SHAPE & DIMENSION(unit/mm); 			A	10.00 ± 0.5	mm
			B	10.00 ± 0.5	mm
			C	6.20 ± 0.4	mm
			D		
			E		
			F		
			G		
			2. 電器性能檢測項目 ELECTTRONICAL REQUIREMENTS;		
<input type="checkbox"/> L		TEST FREQ		測試儀器 TESTING INSTRUMENTS	
<input type="checkbox"/> Q		TEST FREQ	KHZ MHZ	1. Q-METER: <input type="checkbox"/> HP-4342A <input type="checkbox"/> MQ-172	
<input checked="" type="checkbox"/> Z	Z1=20 Ω MIN 25MHZ	KHZ	Z3=	KHZ MHZ	2. LCR-METER: <input type="checkbox"/> TH2826
	Z2=80 Ω MIN 100MHZ	KHZ	Z4=	KHZ MHZ	3. IMPEDANCE ANALYZER: <input checked="" type="checkbox"/> HP-4191A <input type="checkbox"/> Agilent 16092A <input type="checkbox"/> TH2826
溫度 TEMP	25±5℃	濕度 HUMIDITY	60±8%		4. L-METER: <input type="checkbox"/> TH-2775B
繞線: WINDING	Z: Φ 0.5*100L(mm)*0.5TS			5. DIGITAL MINI-OHM METER: VP2941A	
3. 外觀 THE LIMIT OF BREAKAGE:					
項目 Item			標準值 Standard Value		
一處缺陷的面积 Area of a breakage			≤1mm ²		
总缺陷面积 ALL area of the breakage			≤2mm ²		
缺陷深度 The depth of the breakge			≤0.4mm		
毛刺长度 The length of burr			≤0.2mm		
4. 包裝 PACKAGING: 內包裝采用泡塑盒, 外包裝采用紙箱, 每箱產品外面都蓋上标签 (包括品名、數量、批號、檢驗員)。 Inner packing gdopts foam plastics box, outer packing adopts carton and each carton should have a qualified label outside(include the variey, quantity, batch number and inspector).					

檢 測 數 據

INSPECTION DATA

規 格 ITEM	CT2-10x10x6.2					編 號 SERIAL NO.	NO.1026132117							
1. 形壯尺寸(单位/毫米): SHAPE & DIMENSION(unit/mm): =							<input type="checkbox"/> L							
							<input type="checkbox"/> Q				KHZ MHZ			
							<input checked="" type="checkbox"/> Z		Z1=20 Ω MIN KHZ 25MHZ		Z1= KHZ MHZ			
									Z2=80 Ω MIN KHZ 100MHZ		Z4= KHZ MHZ			
							溫 度 TEMP		25±5°C		濕 度 HUMIDITY		60±8%	
							繞 線: WINDING		Z: Φ 0.5*100L(mm)*0.5TS					
項 目 ITEM	电 气 性 能 ELECTRONIC CHARACTERISTICS						尺 寸 DIMENSION(unit:mm)							
	Q	L(μH)	Z1(Ω)	Z2(Ω)	Z3(Ω)	Z4(Ω)	A	B	C	D	E	F		
			20	80			10	10	6.2					
+			/	/			0.5	0.5	0.4					
-			0	0			0.5	0.5	0.4					
1			50.1	122.4			9.99	10.03	6.21					
2			49.6	119.1			9.96	10.01	6.22					
3			50.6	122.9			10.02	10.04	6.21					
4			50.4	126.2			9.98	10.13	6.23					
5			48.7	128.8			9.96	10.00	6.19					
6			52.1	135.0			10.04	10.14	6.18					
7			51.6	123.7			10.02	10.02	6.23					
8			50.8	121.8			10.04	10.05	6.23					
9			51.0	124.4			10.02	10.07	6.19					
10			52.1	135.0			10.01	10.11	6.20					
X			50.7	125.9			10.00	10.06	6.21					
Y/N			Y	Y			Y	Y	Y					
2. 測試儀器 TESTING INSTRUMENTS HP 4191A							檢 測 INSPECTION		復 核 CHECK		確 認 APPROVAL			
														

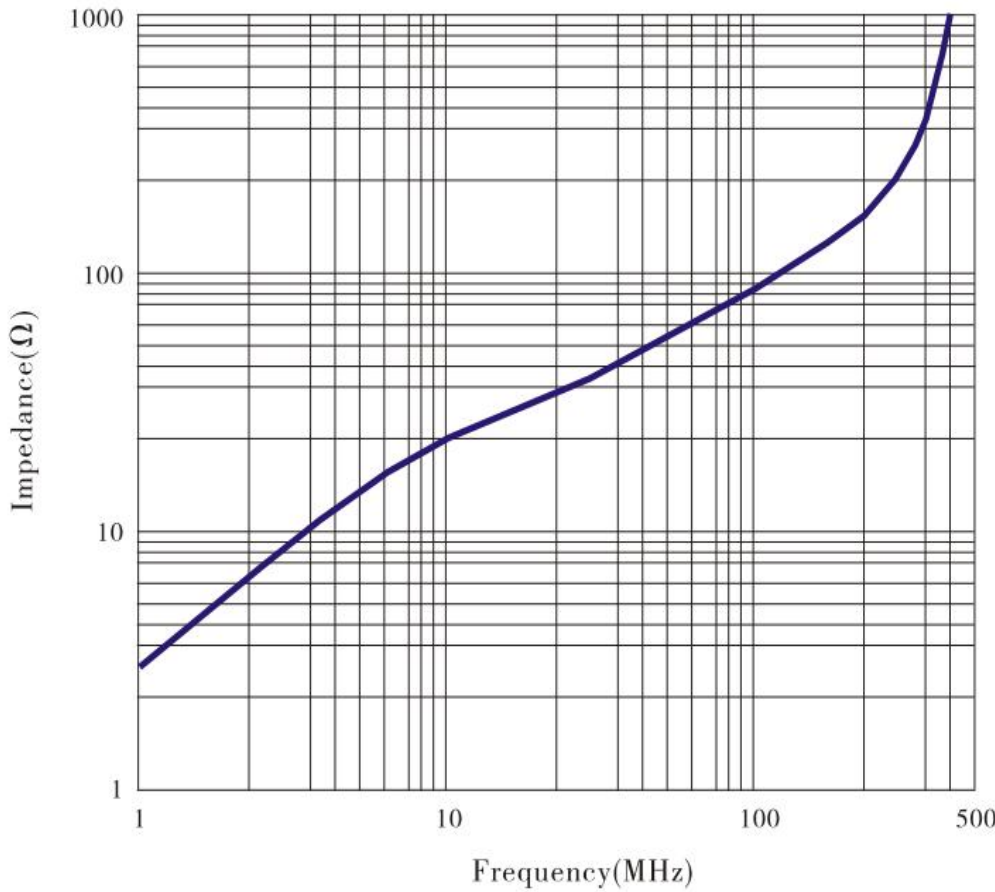
阻抗 - 頻率曲綫

IMPEDANCE V.S.FREQUENCY (Z-Y)

規格 ITEM	CT2-10x10x6.2	編號 SERIAL NO.	NO.1026132117
------------	---------------	------------------	---------------

材质特性：
MATERIAL CHARACTERISTICS

材料 牌号 Material	初始磁 导率 Initial Permeability	比损耗因子 Relative Loss Factor	比温度系数 Relative Temperature Coefficient	饱和磁通密度 Saturation Magnetic Flux Density	剩磁 Reman- ence	矫顽力 Coercivi- ty	居里温度 Curie Tempera- ture	电阻率 Electric Resistiv- ity	使用范围 Applied Frequenc- y Range	密度 Densit- y
Unit symbol	μ i $\pm 20\%$	$\tan \delta / \mu$ i $\times 10^{-6}$	$\alpha \mu$ i γ $\times 10^{-6}$	Bs (MT)	Br (MT)	HC (A/m)	Tc (°C)	ρ ($\Omega \cdot m$)	F Mhz	d g/cm ³
F2	650	20(0.1MHz)	2-5	330(1600A/m)	150	35	>110	>10 ⁵	0.1-1.5	5



测试条件；
TESTING CONDITION;

1. 测试仪器： HP 4191A
Testing Equipment:

2. 测试频率区间： 1MHZ-500MHZ
Testing Frequency Range:

3. 测试绕组： $\Phi 0.5 \times 100L(mm) \times 0.5TS$
Testing Coil Specification:

檢 測
INSPECTION

復 核
CHECK

确 認
APPROVAL



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [canfeng](#) manufacturer:

Other Similar products are found below :

[CSR9-170B](#) [CUF9-230C](#) [CSR9-200D](#) [CSR9-160B](#) [CUF9-250D](#) [CSR9-190C](#) [CUF9-300D](#) [CFS9-36*9.4*28*14.8-2.0](#) [CNF-50A](#) [CRH-16x50.8x8](#) [CFN40-26*9*20.6*17.5-2.6](#) [CF2-40x25x15](#) [CF2-80x50x25](#) [CF2-50x32x20-100](#) [CF2-59*40*20](#) [CD-20x10x10c](#) [CT2-26x28.5x13](#) [CN65-40.5x15x27.4](#) [CT2-36x15x23](#) [CSR9-130B](#) [CD-50x25x20](#) [CF2-32x20x10](#) [CRH-16x28x10](#) [CT2-28x28x16](#) [CF2-30x20x10](#) [CT9-16x8x9](#) [CRH-22.5x29x13.8](#) [CRH-14.2x20x9.5](#) [CT2-36x23x13](#) [CSR9-25x12x15](#) [CNF-100](#) [CT2-18x8x10](#) [CT2-25x8x15](#) [CT2-16x10x10](#) [CRH-14x15x7.2](#) [CRH-15x12x10.5](#) [CRH-22x24x15](#) [CNF-130A](#) [CSR9-80A](#) [CT9-25x20x15](#) [CRH17.5x28.5x11.5](#) [CRH17.5x28.5x10.5](#) [CT2-22.5x8x13.8](#) [CRH-22x20x15](#) [CRH14.2x28.5x9](#) [CFS9-28X13X20X11-7.2](#) [CRH-14.2x28.5x4.5](#) [CT2-22x8x14](#) [CNF-65](#) [CT2-28x13x16](#)