

承認書

SPECIFICATION FOR APPROVAL




客户名稱
CUSTOMER

客户料号
CUS. P/N

尺寸
DIMENSION **CT2-10x5x7**

編號
SERIAL NO. **NO. CF1026132198**

日期
DATE **2023年6月12日**

| 出圖 DRAWING | | |
|---|---|---|
| 發行 ISSUE | 復核 CHECKED | 核準 APPROVAL |
|  |  |  |
| DATE: 2023/6/12 | | |

| 承認 CUSTOMER APPROVAL |
|-------------------------|
| |

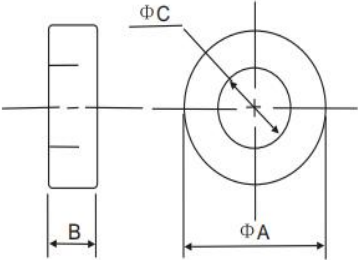


东莞市灿峰电子有限公司
DONG GUAN CITY CAN FENG ELETRONICS CO., LTD
网址: www.canfengele.com E-mail: canfengdianzi@163.com

联系方式
王小姐: 13556646144
洪先生: 13809826886

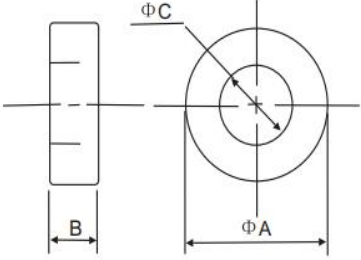
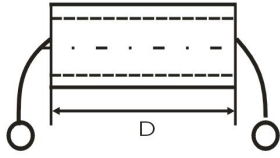



承認書

SPECIFICATION FOR APPROVAL

| | | | | | |
|---|------------------------|----------------|--|--|--|
| 規格 ITEM | CT2-10x5x7 | | 編號 SERIAL NO. | NO. CF1026132198 | |
| 1. 形狀尺寸 (單位mm) ; SHAPE & DIMENSION(unit/mm);  | | | A | 10.00 ± 0.5 | mm |
| | | | B | 5.00 ± 0.5 | mm |
| | | | C | 7.00 ± 0.5 | mm |
| | | | D | | |
| | | | E | | |
| | | | F | | |
| | | | G | | |
| | | | 2. 電器性能檢測項目 ELECTTRONICAL REQUIREMENTS; | | |
| <input type="checkbox"/> L | | TEST FREQ | | 測試儀器 TESTING INSTRUMENTS | |
| <input type="checkbox"/> Q | | TEST FREQ | KHZ MHZ | 1. Q-METER: <input type="checkbox"/> HP-4342A <input type="checkbox"/> MQ-172 | |
| <input checked="" type="checkbox"/> Z | Z1=30 Ω MIN 25MHZ | KHZ | Z3= | KHZ MHZ | 2. LCR-METER: <input type="checkbox"/> TH2826 |
| | Z2=65 Ω MIN 100MHZ | KHZ | Z4= | KHZ MHZ | 3. IMPEDANCE ANALYZER: <input checked="" type="checkbox"/> HP-4191A <input type="checkbox"/> Agilent 16092A <input type="checkbox"/> E4991A |
| 溫度 TEMP | 25±5℃ | 濕度 HUMIDITY | 60±8% | | 4. L-METER: <input type="checkbox"/> TH-2775B |
| 繞線: WINDING | Z: Φ0.5*100L(mm)*0.5TS | | | 5. DIGITAL MINI-OHM METER: VP2941A | |
| 3. 外觀 THE LIMIT OF BREAKAGE: | | | | | |
| 項目 Item | | | 標準值 Standard Value | | |
| 一處缺陷的面积 Area of a breakage | | | ≤1mm ² | | |
| 总缺陷面积 ALL area of the breakage | | | ≤2mm ² | | |
| 缺陷深度 The depth of the breakage | | | ≤0.4mm | | |
| 毛刺长度 The length of burr | | | ≤0.2mm | | |
| 4. 包裝 PACKAGING: 內包裝采用泡塑盒, 外包裝采用紙箱, 每箱產品外面都蓋上标签 (包括品名、數量、批號、檢驗員)。 Inner packing gdopts foam plastics box, outer packing adopts carton and each carton should have a qualified label outside(include the variey, quantity, batch number and inspector). | | | | | |

檢 測 數 據

INSPECTION DATA

| 規 格 ITEM | CT2-10x5x7 | | | | | 編 號 SERIAL NO. | NO. CF1026132198 | | | | | | | |
|---|---------------------------------------|-------|-------|-------|-------|-------------------|---|------|--|---|---|---|---|--|
| 1. 形壯尺寸(单位/毫米): SHAPE & DIMENSION(unit/mm): = | | | | | | | <input type="checkbox"/> L | | | | | | | |
|  | | | | | | | <input type="checkbox"/> Q | | | | KHZ MHZ | | | |
| | | | | | | | <input checked="" type="checkbox"/> Z | | Z1=30 Ω MIN 25MHZ KHZ Z2=65 Ω MIN 100MHZ KHZ | | Z1= KHZ Z4= KHZ MHZ | | | |
| | | | | | | | 溫 度 TEMP | | 25±5°C | | 濕 度 HUMIDITY | | 60±8% | |
| | | | | | | | 繞 線: WINDING | | Z: Φ 0.5*100L(mm)*0.5TS | | | | | |
| | | | | | | | | | | | | | | |
| 項 目 ITEM | 电 气 性 能 ELECTRONIC CHARACTERISTICS | | | | | | 尺 寸 DIMENSION(unit:mm) | | | | | | | |
| | Q | L(μH) | Z1(Ω) | Z2(Ω) | Z3(Ω) | Z4(Ω) | A | B | C | D | E | F | | |
| | | | 30 | 65 | | | 10 | 5 | 7 | | | | | |
| + | | | / | / | | | 0.5 | 0.5 | 0.5 | | | | | |
| - | | | 0 | 0 | | | 0.5 | 0.5 | 0.5 | | | | | |
| 1 | | | 46.6 | 94.4 | | | 9.99 | 5.02 | 7.01 | | | | | |
| 2 | | | 46.1 | 96.8 | | | 9.96 | 5.00 | 7.02 | | | | | |
| 3 | | | 47.0 | 87.4 | | | 10.02 | 5.02 | 7.01 | | | | | |
| 4 | | | 46.4 | 93.3 | | | 9.98 | 5.07 | 7.04 | | | | | |
| 5 | | | 47.3 | 93.3 | | | 9.96 | 5.00 | 6.99 | | | | | |
| 6 | | | 46.6 | 93.4 | | | 10.04 | 5.07 | 6.98 | | | | | |
| 7 | | | 46.0 | 93.3 | | | 10.02 | 5.01 | 7.04 | | | | | |
| 8 | | | 47.7 | 93.3 | | | 10.04 | 5.03 | 7.04 | | | | | |
| 9 | | | 47.5 | 93.3 | | | 10.02 | 5.04 | 6.99 | | | | | |
| 10 | | | 47.6 | 94.7 | | | 10.01 | 5.06 | 7.00 | | | | | |
| X | | | 46.9 | 93.3 | | | 10.00 | 5.03 | 7.01 | | | | | |
| Y/N | | | Y | Y | | | Y | Y | Y | | | | | |
| 2. 測試儀器 TESTING INSTRUMENTS HP 4191A | | | | | | | 檢 測 INSPECTION | | 復 核 CHECK | | 確 認 APPROVAL | | | |
| | | | | | | |  | |  | |  | |  | |

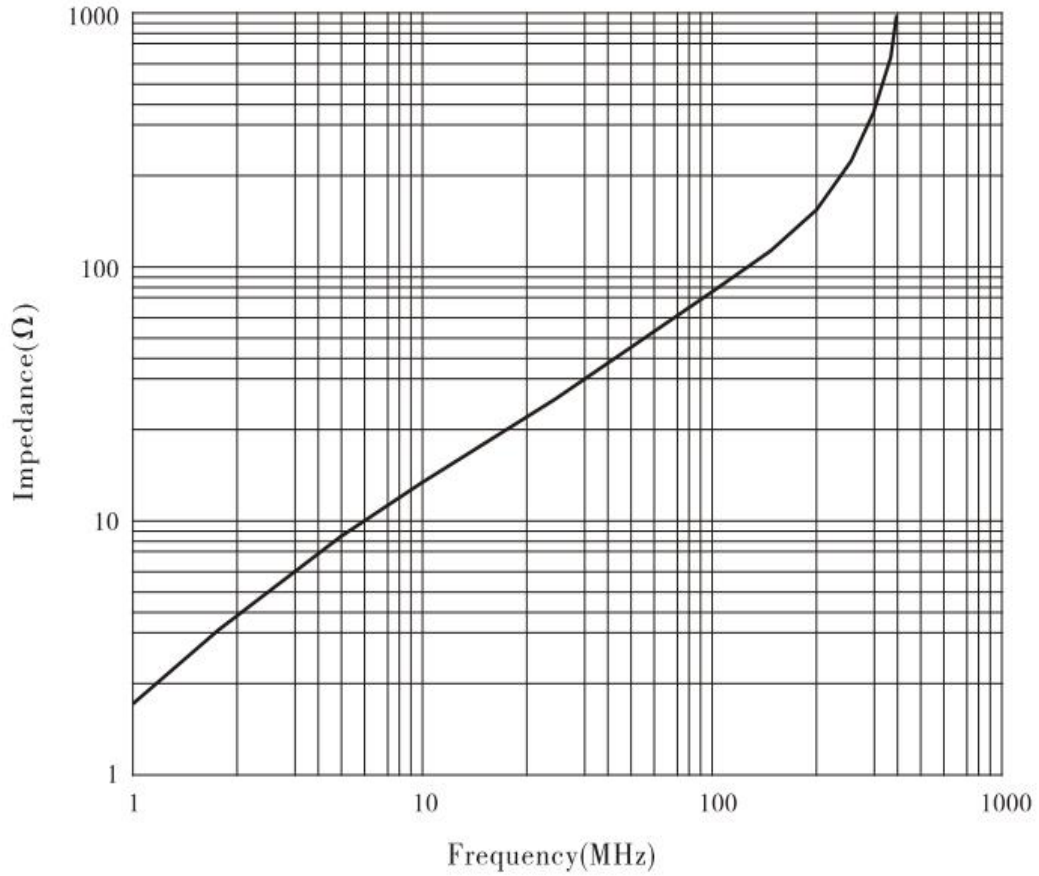
阻抗 - 頻率曲綫

IMPEDANCE V.S.FREQUENCY (Z-Y)

| | | | |
|------------|------------|------------------|------------------|
| 規格 ITEM | CT2-10x5x7 | 編號 SERIAL NO. | NO. CF1026132198 |
|------------|------------|------------------|------------------|

材质特性：
MATERIAL CHARACTERISTICS

| 材料 牌号 Material | 初始磁 导率 Initial Permeability | 比损耗因子 Relative Loss Factor | 比温度系数 Relative Temperature Coefficient | 饱和磁通密度 Saturation Magnetic Flux Density | 剩磁 Reman- ence | 矫顽力 Coercivi- ty | 居里温度 Curie Tempera- ture | 电阻率 Electric Resistiv- ity | 使用范围 Applied Frequency Range | 密度 Densit- y |
|----------------------|--------------------------------------|---|---|--|----------------------|------------------------|-----------------------------------|-------------------------------------|---------------------------------------|------------------------|
| Unit symbol | μ_i $\pm 20\%$ | $\tan \delta / \mu_i$ $\times 10^{-6}$ | $\alpha \mu_i \gamma$ $\times 10^{-6}$ | Bs (MT) | Br (MT) | HC (A/m) | Tc (°C) | ρ ($\Omega \cdot m$) | F Mhz | d g/cm ³ |
| F2 | 650 | 20(0.1MHz) | 2-5 | 260(1600A/m) | 150 | 35 | >140 | >10 ⁵ | 0.1-1.5 | 4.6 |



| | | | |
|---|-------------------|--------------|-----------------|
| 测试条件； TESTING CONDITION; | 檢 測 INSPECTION | 復 核 CHECK | 确 認 APPROVAL |
| 1. 测试仪器： HP 4191A Testing Equipment: | | | |
| 2. 测试频率区间： 1MHZ-1000MHZ Testing Frequency Range: | | | |
| 3. 测试绕组： Φ0.5*100L(mm)*0.5TS Testing Coil Specification: | | | |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [canfeng manufacturer](#):

Other Similar products are found below :

[CD-20x10x10c](#) [CD-50x25x20](#) [CF2-10x4x6](#) [CF2-30x20x10](#) [CF2-32x20x10](#) [CF2-40x25x15](#) [CF2-50x32x20-100](#) [CF2-59*40*20](#) [CF2-80x50x25](#) [CF6N 14.2x28.5x6.35](#) [CFN40-26*9*20.6*17.5-2.6](#) [CFS2-14x8x10x15-4](#) [CFS9-19x6.5x14x12-1.8](#) [CFS9-23.5x6.5x15x19.5-1.4](#) [CFS9-23.5x6.5x19.5x15-1.8](#) [CFS9-23.8x6.3x19.5X15-1.8](#) [CFS9-25x5x21x12-1.4](#) [CFS9-25x5x21x15-1.5](#) [CFS9-28X13X20X11-7.2](#) [CFS9-28x22x12x8-2](#) [CFS9-28x7.7x23x12-2.4](#) [CFS9-29x10x8x22-2.4](#) [CFS9-33.5x12x6.5-1.8](#) [CFS9-33.5x12x6.8-1.8](#) [CFS9-36*9.4*28*14.8-2.0](#) [CFS9-40x6.5x35x12-1.8](#) [CFS9-49.6x6.5x43x12-1.4](#) [CFS9-57.2x6.5x51.6x12-1.2](#) [CFS9-57.2x6.5x51.6x18-1.2](#) [CFS9-7.5x5.5x5.3x11.5-3.3](#) [CN65-40.5x15x27.4](#) [CNF-100](#) [CNF-130A](#) [CNF-50A](#) [CNF-65](#) [CRH10*20*6.5](#) [CRH-10.4x10.4x5.8](#) [CRH-10.5*12.5*7.2](#) [CRH-10.5x15x5.5](#) [CRH-10.5x20x5.5](#) [CRH-10.5X20X6.5](#) [CRH-10.5x20x7.3](#) [CRH-10x14x6](#) [CRH-10x20x5.5](#) [CRH-11.5x25x5](#) [CRH-12.5x20x8](#) [CRH-12x15x6.5](#) [CRH-12x15x7.2](#) [CRH-12x16x8](#) [CRH12x20x5.6](#)