
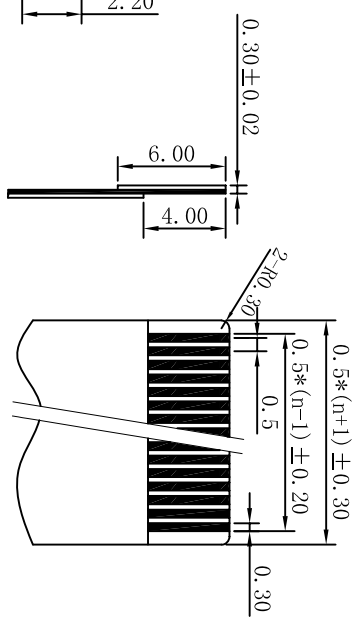



PCB Layout



适用扁平电缆

SPECIFICATIONS

- Pitch: 0.5
- Poles: 4~60
- Voltage rating: 50V DC/AC
- Current rating: 0.4A DC/AC
- Withstand Voltage: 200V AC/m
- Working Temperature: -20°C ~ +85°C
- Insulation Resistance: ≥500MΩ

Material
 Contact: Phosphor Bronze Tin-plated
 Solder tab: Phosphor Bronze Tin-plated
 Housing: Heat resistance plastic (UL94V-0)
 Slider: Heat resistance plastic (UL94V-0)
 Package: Pipe package

TOLERANCE TABLE

.0	±0.30
.00	±0.20
.000	±0.05

APPROVED: _____

CHECKED: _____

DRAWN: 舒梦

DATE: _____

DATE: _____

DATE: 2012-09-21

深圳市灿科盟实业有限公司
 CHANKLEMENT INDUSTRY CO., LTD

TITLE: PFC0.5-XP 下接 掀盖式

PROD. P/N	0.5K-DX-nPWB
UNIT	mm
SCALE	free
FILE NO.	Ckmtw-FPC-0053
REV.	A
	CJ00

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [FFC & FPC Connectors](#) category:

Click to view products by [Cankemeng](#) manufacturer:

Other Similar products are found below :

[HFW11R-1STE1H1LF](#) [FH29B-100S-0.2SHW\(99\)](#) [FA5S008HP1](#) [FH29B-120S-0.2SHW\(99\)](#) [FH29B-80S-0.2SHW\(99\)](#) [FHS-16](#) [FPH-2022G](#)
[52610-1075](#) [52610-1275](#) [52610-1934](#) [XF3M\(1\)-1415-1B-R100](#) [501864-3091-TR225](#) [0525594033](#) [086210010340800](#) [086222026001800](#)
[52271-2869-CUT-TAPE](#) [62674-201121DLF](#) [62684-36210E9ALF](#) [52610-1675](#) [52746-1671-TR250](#) [10051922-2810EHLF](#) [6-520415-9](#)
[BD021-09A-A1-0350-0200-0550-LD](#) [SFV6R-1STE9HLF](#) [XF3M-2915-1B-R100](#) [1658549-1](#) [62674-221121ALF](#) [46214008010800](#)
[046298003000883](#) [151660622](#) [842-816-2630-035](#) [AYF530665TA](#) [AYF351525](#) [046296011930846+](#) [AYF352325A](#) [046254020000800+](#)
[FH19C-13S-0.5SH\(99\)](#) [FH39J-51S-0.3SHW\(99\)](#) [AYF355125A](#) [AYF530365TA](#) [FH29B-44S-0.2SHW\(99\)](#) [SFW5R-2STAE9LF](#) [AYF351125A](#)
[AYF350725A](#) [62684-502100AHLF](#) [FH39-61S-0.3SHW\(99\)](#) [AYF414035A](#) [10064555-172520HLF](#) [AYF212335A](#) [504754-2500](#)