


通用FPC寸法
Applicable FPC

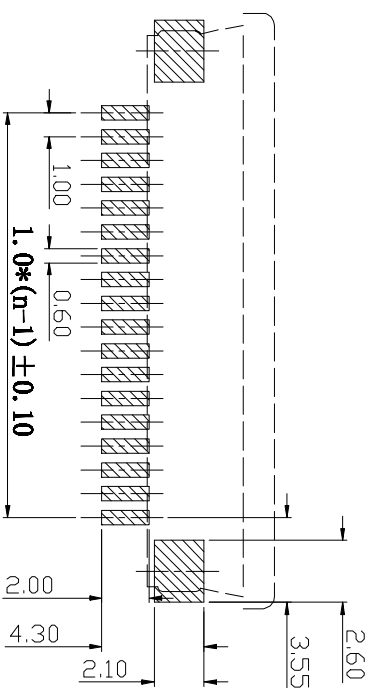

PCB 寸法
PCB Layout

- 备注:
- 1: 塑胶件表面应光洁、无毛刺; 无明显收缩、裂胶等现象.
 - 2: 额定电流 Current rating: 0.4A.
 - 3: 额定电压 Voltage rating: 50V.
 - 4: 耐压 Withstand voltage: 200V AC/minute.
 - 5: 接触电阻 Contact resistance: $\leq 20m\Omega$.
 - 6: 绝缘电阻 Insulation resistance: $500M\Omega$.
 - 7: 工作温度 Working temperature: $-20^{\circ}C$ — $+80^{\circ}C$

TOLERANCE TABLE

.0	±0.30
.00	±0.20
.000	±0.05

APPROVED:	DATE:	TITLE:	UNIT	SCALE	REV.
CHECKED:	DATE:	FPC1.0-XP 下接 抽拉式	mm	free	A
DRAWN:	DATE:	深圳市如科盟实业有限公司 CHANKLEMENT INDUSTRY CO., LTD	PROD. P/N	FILE NO.	CS-08-07/16
审核	2012-09-21		/	Chantw-FPC-0057	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [FFC & FPC Connectors](#) category:

Click to view products by [Cankemeng](#) manufacturer:

Other Similar products are found below :

[HFW11R-1STE1H1LF](#) [FH29B-100S-0.2SHW\(99\)](#) [FA5S008HP1](#) [FH29B-120S-0.2SHW\(99\)](#) [FH29B-80S-0.2SHW\(99\)](#) [FHS-16](#) [FPH-2022G](#)
[52610-1075](#) [52610-1275](#) [52610-1934](#) [XF3M\(1\)-1415-1B-R100](#) [501864-3091-TR225](#) [0525594033](#) [086210010340800](#) [086222026001800](#)
[52271-2869-CUT-TAPE](#) [62674-201121DLF](#) [62684-36210E9ALF](#) [52610-1675](#) [52746-1671-TR250](#) [10051922-2810EHLF](#) [6-520415-9](#)
[BD021-09A-A1-0350-0200-0550-LD](#) [SFV6R-1STE9HLF](#) [XF3M-2915-1B-R100](#) [1658549-1](#) [62674-221121ALF](#) [46214008010800](#)
[046298003000883](#) [151660622](#) [842-816-2630-035](#) [AYF530665TA](#) [AYF351525](#) [046296011930846+](#) [AYF352325A](#) [046254020000800+](#)
[FH19C-13S-0.5SH\(99\)](#) [FH39J-51S-0.3SHW\(99\)](#) [AYF355125A](#) [AYF530365TA](#) [FH29B-44S-0.2SHW\(99\)](#) [SFW5R-2STAE9LF](#) [AYF351125A](#)
[AYF350725A](#) [62684-502100AHLF](#) [FH39-61S-0.3SHW\(99\)](#) [AYF414035A](#) [10064555-172520HLF](#) [AYF212335A](#) [504754-2500](#)