


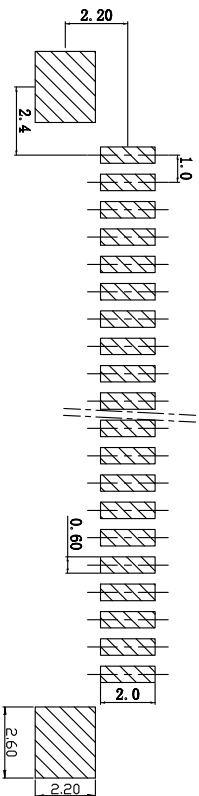
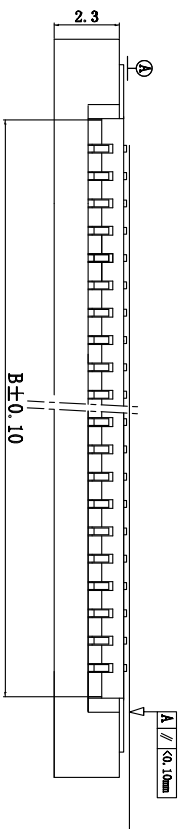



标记	版次	变更内容	日期
	A版	新版图面	2011-01-13
△	B版	设计变更, 焊片2.45修改为1.75mm	2017-10-06

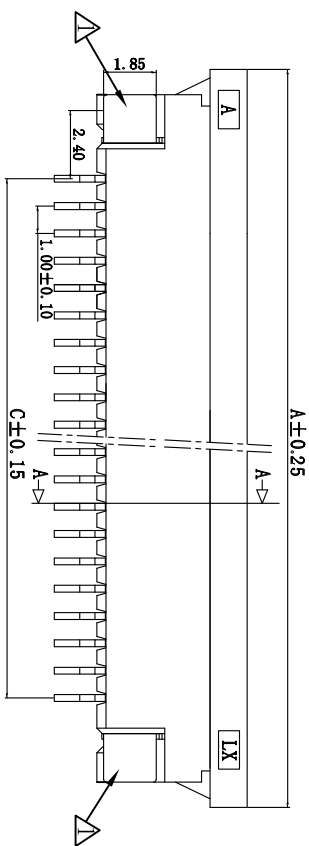

适用电缆 (proper cable) ($\delta=0.3mm$)

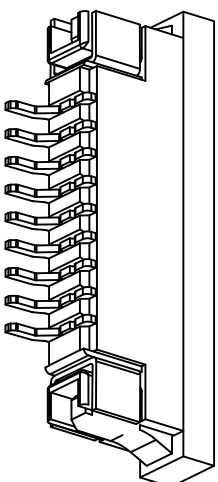

孔位	A	B	C	孔位	A	B	C
3	10.00	4.10	2.00	22	28.00	23.10	21.00
4	11.00	5.10	3.00	23	30.00	24.10	22.00
5	12.00	6.10	4.00	24	31.00	25.10	23.00
6	13.00	7.10	5.00	25	32.00	26.10	24.00
7	14.00	8.10	6.00	26	33.00	27.10	25.00
8	15.00	9.10	7.00	27	34.00	28.10	26.00
9	16.00	10.10	8.00	28	35.00	29.10	27.00
10	17.00	11.10	9.00	29	36.00	30.10	28.00
11	18.00	12.10	10.00	30	37.00	31.10	29.00
12	19.00	13.10	11.00	31	38.00	32.10	30.00
13	20.00	14.10	12.00	32	39.00	33.10	31.00
14	21.00	15.10	13.00	33	40.00	34.10	32.00
15	22.00	16.10	14.00	34	41.00	35.10	33.00
16	23.00	17.10	15.00	35	42.00	36.10	34.00
17	24.00	18.10	16.00	36	43.00	37.10	35.00
18	25.00	19.10	17.00	37	44.00	38.10	36.00
19	26.00	20.10	18.00	38	45.00	39.10	37.00
20	27.00	21.10	19.00	39	46.00	40.10	38.00
21	28.00	22.10	20.00	40	47.00	41.10	39.00

材料 Material
接触件 (Contact) : 磷青铜t=0.25mm 镀亮锡
Phosphor Bronze Tin-plated
焊片 (solder tab) : 磷青铜 t=0.20mm 镀亮锡
Phosphor Bronze Tin-plated
塑胶主体 (Housing) : LCP耐热树脂
(UL94V-0) Heat resistance plastic (UL94V-0)
锁条 (Slider) : PPS耐热树脂
(UL94V-0) Heat resistance plastic (UL94V-0)

技术参数 SPECIFICATIONS
 间距 (Pitch) : 1.0
 极数 (Poles) : 3~40
 额定电压 (Voltage rating) : 50V
 额定电流 (Current rating) : 0.5A
 耐电压值 (Withstand Voltage) : 500V
 工作温度 (Working Temperature) : -25℃~+85℃
 绝缘电阻 (Insulation Resistance) : $\geq 500M\Omega$
 接触电阻 (Contact resistance) : $\leq 30m\Omega$

TOLERANCE TABLE

.0	±0.30
.00	±0.20
.000	±0.05

APPROVED:

DATE:

CHECKED:

DATE:

DRAWN:

DATE:

Juli-Liu

2017-10-06

深圳市灿科盟实业有限公司
 KIMTW CHANKLEMENT INDUSTRY CO., LTD

TITLE: FP01.0-XP 下接 抽拉式

PROD. P/N	/
UNIT	mm
SCALE	free
FILE NO.	Ckmtw-FPC-0086
REV.	A
	LX00

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [FFC & FPC Connectors](#) category:

Click to view products by [Cankemeng](#) manufacturer:

Other Similar products are found below :

[00-6200-227-022-800](#) [006205250500825+](#) [006205280500825+](#) [FPH-1602G](#) [086222026001800](#) [52610-0675](#) [62674-201121DLF](#) [52746-1671-TR250](#) [10051922-1610EHLF](#) [10051922-2810EHLF](#) [686322124422](#) [XF3M-2915-1B-R100](#) [AYF353125A](#) [AYF530665TA](#) [AYF534065TA](#) [20FLH-RSM1-TB](#) [PCA-7F-25-HL-3-G](#) [207356-1](#) [52807-0430](#) [FFC05011-10SBB114W5M](#) [502250-8027](#) [FH28K-40S-0.5SH](#) [200528-0260](#) [FH28K-10S-0.5SH](#) [501951-1250](#) [X05B20U43T](#) [0.5K-DX-30PWB](#) [DS1020-08-10VBT12](#) [THD0515-34CL-GF](#) [X05A10L28G](#) [ECC2841061EU](#) [20539-030E-01](#) [1.0K-DHQX-16PWB](#) [1.0K-DHQX-30PWB](#) [1775333-6](#) [10054365-202110ELF](#) [10054365-242110ELF](#) [10054365-282110ELF](#) [10064555-392220HLF](#) [59453-041110EBHLF](#) [59453-091110EDHLF](#) [62674-241141ALF](#) [62684-432100ALF](#) [62684-451100AHLF](#) [62684-5721N0ALF](#) [HFW11R-1STE1MTLF](#) [HFW12R-1STE9LF](#) [HFW14R-1STE9MTLF](#) [HFW18S-2STE9LF](#) [HFW20R-1STAE1HLF](#)