
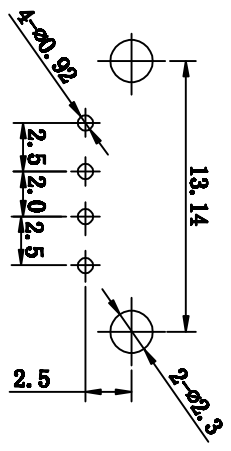
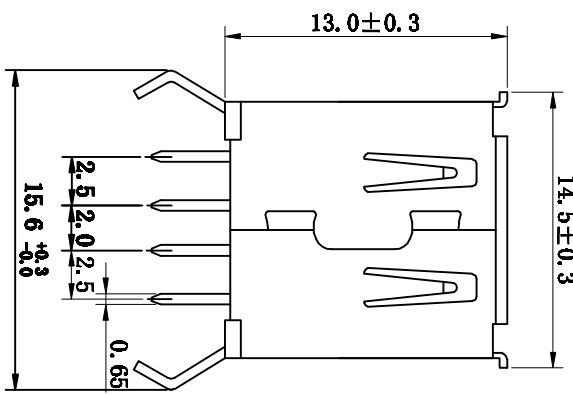


客户确认
日期

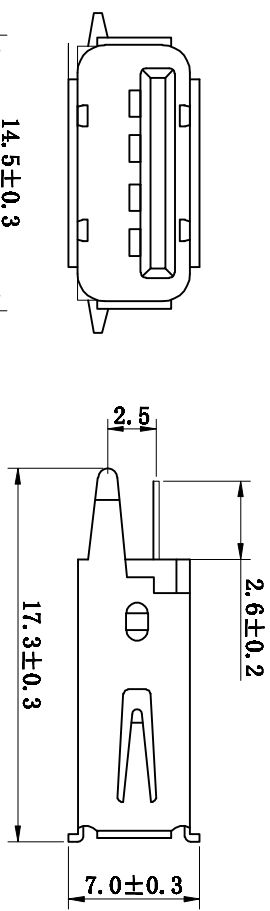

PCB Layout

Specifications:

Electrical:
 Contact Resistance: 30 milliohms MAX
 Dielectric Withstanding Voltage: 500V AC AT Sea Level
 Insulation Resistance: 1000 MEGA ohms MIN.
Mechanical:
 Mating Force: 4.0KG MAX
 Unmating Force: 0.7KG MIN
Material:
 Housing: High Temperature Thermoplastic UL94V-0
 Contact: Copper Alloy
 Shell: Copper Alloy
Finish:
 Contact: plated Gold in Mating Area;
 Tin/Lead On Solder Tails
 Shell: Tin/Lead plating
 Nickel plating

TOLERANCE TABLE	
.0	±0.20
.00	±0.10
.000	±0.05

APPROVED:	DATE:	C 深圳市灿科置实业有限公司 CHANKUANG INDUSTRIAL CO., LTD
CHECKED:	DATE:	
DRAWN:	DATE:	TITLE:
LXF	2009-07-20	USB-A/R-1*4P H=13.0mm 180度直插 铜 DIP 铜壳
CLIENT P/N	SCALE	UNIT
C3902703	free	mm
FILE NO.	REV.	SCALE
U-USBAS04P-F002	A	free

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [USB Connectors](#) category:

Click to view products by [Cankemeng](#) manufacturer:

Other Similar products are found below :

[950](#) [A-USB A-LP-SMT-C](#) [A-USB B-TOP-C](#) [MUSBD11135](#) [17-200721](#) [217450-1](#) [KMBVX-TH-5S-B30](#) [KUSBX-AS2N-W](#) [KUSBX-SMT2AP1S-W30](#) [935](#) [957](#) [30-498-6](#) [SK-60A-2](#) [1734082-1](#) [30-470](#) [30-489](#) [30-541](#) [MAB 5 S](#) [A-USB A-2P-C](#) [MIKROE-1451](#)
[USBFTVSCCG](#) [1-1734084-2](#) [MUSBA81130](#) [NK-27-32SL](#) [NK-L8-22C-5/8](#) [10135326-001LF](#) [4198](#) [690-024-633-031](#) [UB-20PMFP-LC7001](#)
[17-200011](#) [UB-20AFMM-LL7A01](#) [CAP-WCCMLPB1](#) [CAP-WCCMLPC1](#) [2274475-3](#) [914-614A2025S10200](#) [USB3FTV7SAGF059](#)
[USB3FTV2SAZNF459](#) [USB3FTV7SAZNF459](#) [HYCW153-USBD05-500B](#) [HYCW148-USBD05-117B](#) [HYCW149-USBD05-740B](#)
[HYCW214-USBA04-113B](#) [HYCW213-USBA04-113B](#) [KMMX-BSMT35S-1-B30TR](#) [2345986-1](#) [10082141-N340LF](#) [10117836-011LF](#)
[GSB3C3133DSYHR](#) [GT-USB-2014-CWG1](#) [GT-USB-7010ANS](#)