
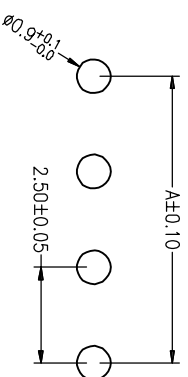
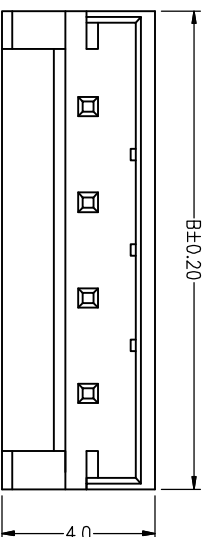


Pin 数	2P	3P	4P	5P	6P	7P	8P	9P	10P	11P	12P	13P	14P	15P
R-寸	2.50	5.00	7.50	10.0	12.5	15.0	17.5	20.0	22.5	25.0	27.5	30.0	32.5	35.0
A	7.5	10.0	12.5	15.0	17.5	20.0	22.5	25.0	27.5	30.0	32.5	35.0	37.5	40.0
B														

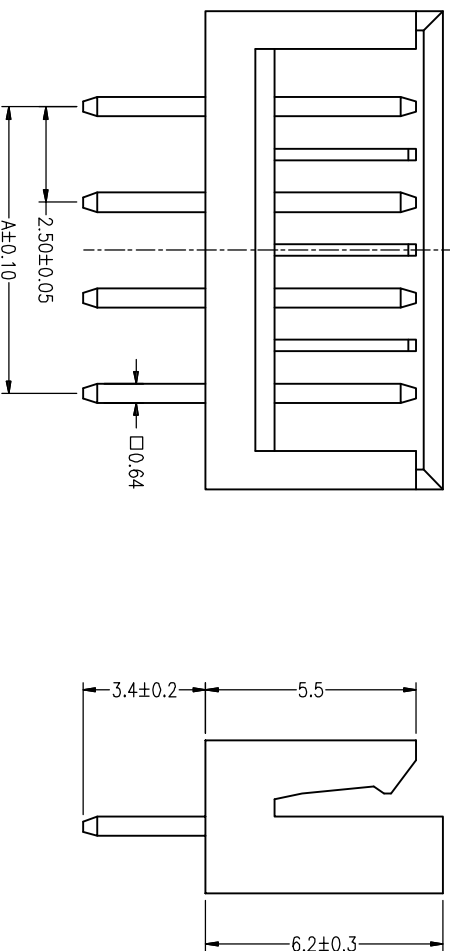

PCB Layout


SPECIFICATIONS

Current rating: 3A AC/DC
Voltage rating: 250V AC/DC
Contact resistance: 20m Ω max.
Withstand voltage: 1000V AC/min
Insulation resistance: 1000M Ω /min.
Temperature range: -25°C~+85°C
Applicable PC board thickness: 0.063"(1.6)

Material:

Part No: 2~15
Post: Brass. Tin/plated
Base: PA66 UL94V-2

TOLERANCE TABLE	
.0	±0.25
.00	±0.10
.000	±0.05

APPROVED:	DATE:	 深圳市灿科盟实业有限公司 CHANKEMENG INDUSTRY CO., LTD	
CHECKED:	DATE:		
DRAWN:	DATE:	TITLE:	
Juli-Liu	2014-01-10	2504S-XP	
CLIENT P/N	UNIT	SCALE	REV.
/	mm	free	A
FILE NO.	CKM-2504-00001		

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Cankemeng](#) manufacturer:

Other Similar products are found below :

[57102-F02-18ULF](#) [58102-G61-06LF](#) [0009485154](#) [009176003701906](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#) [622-0430](#) [622-3653LF](#)
[63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [644827-2](#) [65495-038](#) [65692-001LF](#) [65781-018](#) [65781-047](#) [65817-010LF](#)
[65817-015LF](#) [66207-023LF](#) [67016-026LF](#) [67095-007LF](#) [68631-112](#) [68645-018](#) [68648-049](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#)
[70-4853B](#) [707-5020](#) [707-5028](#) [71.350.2428.0](#) [71961-016LF](#) [733-134](#) [754199-000](#) [760-3052](#) [787-8014-00](#) [FCN-367T-T012/H](#) [80.063.4001.1](#)
[800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#) [803-41-018-10-001000](#) [803-43-014-20-](#)
[001000](#)