

## DV Series Chip type

### Features

- ◆ Chip type ,Low impedance
- ◆ Chip type with load life of 2000 hours at +105°C
- ◆ Designed for surface mounting on high density PC board
- ◆ Applicable to automatic mounting machine using carrier tape
- ◆ Complied to the RoHS directive
- ◆ For detail specifications, please refer to Engineering Bulletin NO. E173

ZV      Low Impedance → DV




### Specifications

Item	Performance Characteristics						
Operating Temperature Range	-55~ +105°C						
Rated Voltage Range	6.3~50 VDC						
Capacitance Range	1 to 1500 μF						
Capacitance Tolerance	±20%(120Hz,+20°C)						
Leakage Current (+20°C,max.)	I≤0.01 CV or 3 (μA)After 2 minutes whichever is greater measured with rated working voltage applied.						
Dissipation Factor (tan δ , at 20°C , 120Hz)	Working voltage(VDC)	6.3	10	16	25	35	50
	D.F. (%) max.	24	19	16	14	14	12
Low Temperature Characteristics (at 120Hz)	Impedance ratio max						
	Working voltage(VDC)	6.3	10	16	25	35	50
	Z-25°C/Z+20°C	2	2	2	2	2	2
Load Life	Z-55°C/Z+20°C	8	6	4	4	3	3
	Test conditions						
	Duration time	:2000 Hrs					
Shelf Life	Ambient temperature	:+105°C					
	Applied voltage	:Rated DC working voltage					
	After test requirement at +20°C :						
Resistance to soldering heat	Capacitance change	:Within ±30% of initial value					
	Dissipation factor	:Less than 300% of specified value					
	Leakage current	:Less than specified value					
The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them at 250°C for 30 seconds.							
Leakage current		Less than specified value					
Capacitance change		Within ±10% of initial value					
tan δ		Less than specified value					

### Multiplier for Ripple Current vs. Frequency

CAP(μF)\Frequency(Hz)	60(50)	120	400	1K	10K	50K-100K
CAP≤10	0.47	0.59	0.76	0.85	0.97	1.0
10<CAP≤100	0.52	0.65	0.80	0.89	0.97	1.0

### Diagram of Dimensions:(unit:mm)

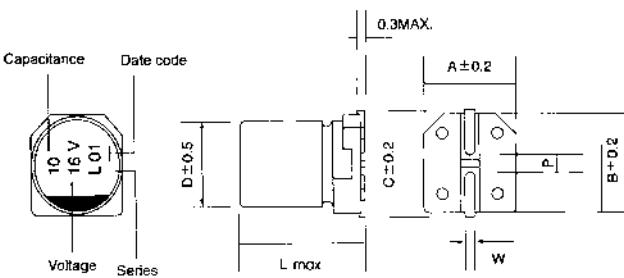

φD	L	A	B	C	W	P
4	5.5	4.3	4.3	4.9	0.5~0.8	1.0
5	5.5	5.3	5.3	5.9	0.5~0.8	1.4
6.3	5.5	6.6	6.6	7.2	0.5~0.8	2.2
6.3	7.7	6.6	6.6	7.2	0.5~0.8	2.2
8	6.5	8.3	8.3	9.0	0.5~0.8	2.3
8	10.5	8.3	8.3	9.0	0.7~1.1	3.1
10	10.5	10.3	10.3	11.0	0.7~1.1	4.5

## Case Size

Φ DxL(mm)

WV (SV) Cap (μF)	6.3 (8)			10 (13)			16 (20)			25 (32)			35 (44)			50 (63)		
	Size	Ripple	Impedance															
1.0																4X5.5	55	4.5
2.2																4X5.5	55	4.5
3.3																4X5.5	55	4.5
4.7																4X5.5	85	2.3
6.8										4X5.5	70	2.8	4X5.5	88	2.2	5X5.5	75	3.8
10							4X5.5	80	2.2	4X5.5	85	2.1	4X5.5	90	2.0	5X5.5	95	2.8
													5X5.5	125	1.4	6.3X5.5	130	2.2
																6.3X5.5	140	1.6
15							4X5.5	85	2.0	5X5.5	125	1.9	5X5.5	140	1.2	6.3X5.5	155	1.1
22	4X5.5	75	2.2	4X5.5	80	2.2	4X5.5	90	1.98	5X5.5	145	1.2	5X5.5	155	1.1	6.3X5.5	170	1.05
							5X5.5	140	1.2	6.3X5.5	160	1.15	6.3X5.5	170	1.05			
27	4X5.5	79	1.98	5X5.5	125	1.9	5X5.5	170	0.74	6.3X5.5	200	0.62	6.3X5.5	210	0.6	6.3X7.7	180	1.2
33	4X5.5	82	1.9	4X5.5	90	1.85	6.3X5.5	185	0.6	5X5.5	160	1.05	6.3X5.5	230	0.54	6.3X7.7	190	0.71
	5X5.5	130	1.3	5X5.5	150	1.2				6.3X5.5	220	0.58	8X6.5	260	0.51	8X6.5	200	0.7
47	4X5.5	86	1.88	5X5.5	165	1.1	5X5.5	195	1.05	6.3X5.5	220	0.56	6.3X5.5	240	0.53	6.3X7.7	230	0.7
	5X5.5	150	1.1	6.3X5.5	180	0.59	6.3X5.5	210	0.58	6.3X7.7	230	0.54	8X6.5	250	0.49	8X6.5	240	0.69
56	5X5.5	150	1.10	6.3X5.5	210	0.57	6.3X5.5	220	0.56	6.3X5.5	230	0.54	6.3X7.7	250	0.49	8X10.5	300	0.52
68	5X5.5	160	0.9	6.3X5.5	220	0.55	6.3X5.5	230	0.54	6.3X5.5	240	0.48	6.3X7.7	265	0.4	8X10.5	320	0.5
	6.3X5.5	220	0.55				8X6.5	240	0.50	8X6.5	260	0.45						
100	5X5.5	170	0.8	6.3X5.5	240	0.53	6.3X5.5	255	0.52	6.3X7.7	290	0.38	6.3X7.7	300	0.38	8X10.5	350	0.46
	6.3X5.5	230	0.53				8X6.5	300	0.36	8X10.5	420	0.28						
150	6.3X5.5	235	0.51	6.3X5.5	250	0.49	6.3X7.7	265	0.45	8X10.5	480	0.25	8X10.5	510	0.24	10X10.5	600	0.25
	8X6.5	250	0.48	8X6.5	260	0.47	8X6.5	270	0.44									
220	6.3X5.5	240	0.48	6.3X7.7	270	0.44	6.3X7.7	275	0.43	8X10.5	530	0.22	8X10.5	570	0.21	10X10.5	650	0.23
	6.3X7.7	260	0.45	8X6.5	285	0.40	8X6.5	285	0.41									
330	6.3X7.7	275	0.36	8X10.5	500	0.25	8X10.5	550	0.25	8X10.5	570	0.2	10X10.5	650	0.15			
	8X6.5	290	0.34															
470	8X10.5	450	0.28	8X10.5	550	0.25	8X10.5	590	0.22	10X10.5	650	0.15						
680	8X10.5	500	0.25	10X10.5	680	0.2	10X10.5	720	0.16									
1000	8X10.5	530	0.20	10X10.5	740	0.15												
	10X10.5	570	0.17															
1200	10X10.5	600	0.16															
1500	10X10.5	650	0.13															

Ripple Current ( mA, rms ) at 105°C 100KHz

Max Impedance ( Ω ) at 20°C 100 KHz

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for Aluminium Electrolytic Capacitors - SMD category:***

***Click to view products by Capxon manufacturer:***

Other Similar products are found below :

[EEV-FK1E332W](#) [ULV2H1R8MNL1GS](#) [MAL214099813E3](#) [CA025M4R70REB-0405](#) [HUB1800-S](#) [34610](#) [RYK-50V101MG5TT-FL](#)  
[107AXZ016MQ5](#) [RVJ-50V101MH10U-R](#) [EMVH101GRA221MMN0S](#) [MAL214097402E3](#) [MAL215375471E3](#) [MAL224699909E3](#)  
[MAL224699813E3](#) [MAL215099014E3](#) [MAL215099017E3](#) [MAL215099117E3](#) [MAL215099818E3](#) [AEH1010331M025R](#)  
[AEA1010221M035R](#) [AEA1010470M080R](#) [AEH1010221M025R](#) [AEA1010102M016R](#) [AEA0810331M025R](#) [AEA1213331M050R](#)  
[AEH1012471M016R](#) [MAL213967339E3](#) [ZSC00AF2211EARL](#) [VB1E100MB054000CE0](#) [RVT0J471M0607](#) [RVT1000UF10V34RV0081](#)  
[XT100UF50V90RV0067](#) [RVE100UF16V67RV0046](#) [RVT100UF16V67RV0120](#) [XT47UF50V90RV0082](#) [XT22UF50V90RV0083](#)  
[RST22UF50V026](#) [RST10UF16V013](#) [RST100UF25V004](#) [RST100UF35V009](#) [RST47UF25V035](#) [RST47UF50V038](#) [RST220UF25V019](#)  
[RSL220UF25V021](#) [XT10UF25V90RV0068](#) [FZ100UF50V90RV0066](#) [RST100UF16V003](#) [XT100UF10V90RV0060](#) [XT100UF16V90RV0061](#)  
[RT100UF35V90RV0102](#)