

KF SERIES ■ LOW IMPEDANCE 105°C TYPE

KEY FEATURES



- ALUMINUM ELECTROLYTIC CAPACITOR ■ THT type
- Endurance: 105°C ■ 2 000 hours up to 5 000 hours
- Low impedance and high ripple current
- High reliability
- Wide voltage range



SPECIFICATIONS

| Items | | Performance Characteristics | | | | | | | | | |
|---|-----------------------------------|--|---|-----|---|-----|--|-----|-----|----|-----|
| Operating Temperature Range | | -40 ~ +105°C | | | | | -25 ~ +105°C | | | | |
| Rated Voltage Range | V _R | 6.3 ~ 100V DC | | | | | 160 ~ 450V DC | | | | |
| Surge Voltage | V _S | (V _R ≤ 315V): V _S = 1.15·V _R | | | | | (V _R > 315V): V _S = 1.10·V _R | | | | |
| Capacitance Range | C _R | 1 ~ 15000μF | | | | | 1 ~ 330μF | | | | |
| Cap. Tolerance | ΔC | ±20% (120Hz ■ 20°C) | | | | | | | | | |
| Leakage Current (20°C ■ V _R applied) | I _{LEAK} | ≤ 0.01·C _R ·V _R or 3μA ■ After 2 minutes | | | | | ≤ 0.03·C _R ·V _R or 3μA ■ After 2 minutes | | | | |
| | | [I _{LEAK} (μA) ; C _R (μF) ; V _R (V)] | | | | | | | | | |
| Dissipation Factor % (20°C ■ 120Hz) | tanδ | V _R (V DC) | 6.3 | 10 | 16 | 25 | 35 | 50 | 63 | 80 | 100 |
| | | tanδ (%) | 18 | 16 | 14 | 12 | 10 | 9 | 8 | 8 | 8 |
| | | V _R (V DC) | 160 | 200 | 250 | 350 | 400 | 420 | 450 | | |
| | | tanδ (%) | 12 | 12 | 12 | 15 | 15 | 17 | 17 | | |
| | | For C _R > 1000μF, add 2% per every multiple 1000μF of rated capacitance value | | | | | | | | | |
| Low Temperature Characteristics at 120Hz | Z ratio max. | V _R (V DC) | 6.3 | 10 | 16 | 25 | 35 | 50 | 63 | 80 | 100 |
| | | Z-25°C/Z+20°C | 4 | 3 | 3 | 3 | 3 | 3 | 2 | 2 | 2 |
| | | Z-40°C/Z+20°C | 8 | 6 | 4 | 3 | 3 | 3 | 3 | 3 | 3 |
| | | V _R (V DC) | 160 | 200 | 250 | 350 | 400 | 450 | | | |
| | | Z-25°C/Z+20°C | 2 | 2 | 3 | 5 | 5 | 6 | | | |
| | | Z-25°C/Z+20°C | For C _R ≥ 1000μF | | Add 0.5 for every multiple 1000μF of C _R value | | | | | | |
| Z-40°C/Z+20°C | For C _R ≥ 1000μF | | Add 1 for every multiple 1000μF of C _R value | | | | | | | | |
| Lifetime Test | | | | | | | | | | | |
| Endurance 105°C (V _R & I _R applied) | Test | 2 000 hours | ø D 5 ~ 6.3 mm ■ ≤ 100V | | | | | | | | |
| | | 3 000 hours | ø D 8 mm ■ ≤ 100V | | | | | | | | |
| | | 5 000 hours | ø D ≥ 10 mm ■ ≤ 100V | | | | | | | | |
| | | 2 000 hours | All ø D ■ ≥ 160V | | | | | | | | |
| | ΔC/C _R | ≤ ±20% of initial measured value | | | | | | | | | |
| tanδ | ≤ 200% of initial specified value | | | | | | | | | | |
| I _{Leak} | ≤ the initial specified value | | | | | | | | | | |
| Shelf Life 105°C (V _R = 0) | Test | 1 000 hours | | | | | | | | | |
| | | ΔC/C _R | ≤ ±20% of initial measured value | | | | | | | | |
| | | tanδ | ≤ 200% of initial specified value | | | | | | | | |
| | I _{Leak} | ≤ the initial specified value | | | | | | | | | |
| Before measurement: Restore capacitor to 20°C, apply V _R for 30 min according JIS-C-5101-4 | | | | | | | | | | | |

STANDARD RATINGS

Part number shows bulk version with straight leads

| V _R (V) | C _R (μF) | ∅ D (mm) | L (mm) | Z - Max. Impedance +20°C - 100kHz (mΩ) | I _R - Max. Ripple Current +105°C - 100kHz (mA rms) | CapXon Part Number |
|-----------------------|------------------------|-------------|-----------|---|--|--------------------|
| 6.3 | 100 | 5 | 11 | 1000 | 170 | KF101M6R3C110A |
| | 120 | 5 | 11 | 920 | 175 | KF121M6R3C110A |
| | 150 | 5 | 11 | 900 | 185 | KF151M6R3C110A |
| | 150 | 6.3 | 11 | 810 | 220 | KF151M6R3E110A |
| | 180 | 6.3 | 11 | 760 | 240 | KF181M6R3E110A |
| | 220 | 6.3 | 11 | 650 | 310 | KF221M6R3E110A |
| | 270 | 6.3 | 11 | 540 | 340 | KF271M6R3E110A |
| | 330 | 8 | 11.5 | 420 | 390 | KF331M6R3F115A |
| | 470 | 8 | 11.5 | 250 | 450 | KF471M6R3F115A |
| | 560 | 8 | 11.5 | 230 | 490 | KF561M6R3F115A |
| | 680 | 8 | 11.5 | 210 | 550 | KF681M6R3F115A |
| | 820 | 8 | 16 | 200 | 620 | KF821M6R3F160A |
| | 1000 | 8 | 16 | 180 | 750 | KF102M6R3F160A |
| | 1000 | 10 | 12.5 | 170 | 770 | KF102M6R3G125A |
| | 1200 | 10 | 16 | 160 | 860 | KF122M6R3G160A |
| | 1500 | 10 | 16 | 140 | 1100 | KF152M6R3G160A |
| | 1800 | 10 | 20 | 110 | 1250 | KF182M6R3G200A |
| | 2200 | 10 | 20 | 90 | 1380 | KF222M6R3G200A |
| | 2200 | 10 | 25 | 95 | 1470 | KF222M6R3G250A |
| | 2700 | 10 | 25 | 75 | 1490 | KF272M6R3G250A |
| | 2700 | 13 | 20 | 75 | 1550 | KF272M6R3I200A |
| | 3300 | 13 | 20 | 36 | 1650 | KF332M6R3I200A |
| | 4700 | 13 | 30 | 36 | 2100 | KF472M6R3I300A |
| | 4700 | 13 | 25 | 40 | 1900 | KF472M6R3I250A |
| | 5600 | 13 | 30 | 34 | 2160 | KF562M6R3I300A |
| | 6800 | 16 | 25 | 32 | 2350 | KF682M6R3J250A |
| 8200 | 16 | 31.5 | 27 | 2550 | KF822M6R3J315A | |
| 10000 | 16 | 35.5 | 24 | 2700 | KF103M6R3J355A | |
| 15000 | 18 | 35.5 | 23 | 2950 | KF153M6R3K355A | |
| 10 | 22 | 5 | 11 | 2700 | 98 | KF220M010C110A |
| | 33 | 5 | 11 | 2600 | 100 | KF330M010C110A |
| | 47 | 5 | 11 | 1340 | 150 | KF470M010C110A |
| | 56 | 5 | 11 | 1230 | 160 | KF560M010C110A |
| | 68 | 5 | 11 | 1050 | 170 | KF680M010C110A |
| | 100 | 5 | 11 | 800 | 210 | KF101M010C110A |
| | 120 | 6.3 | 11 | 750 | 250 | KF121M010E110A |
| | 150 | 6.3 | 11 | 610 | 290 | KF151M010E110A |
| | 180 | 6.3 | 11 | 460 | 320 | KF181M010E110A |
| | 220 | 6.3 | 11 | 350 | 340 | KF221M010E110A |
| | 270 | 8 | 11.5 | 300 | 400 | KF271M010F115A |
| | 330 | 8 | 11.5 | 270 | 460 | KF331M010F115A |
| | 470 | 8 | 11.5 | 250 | 580 | KF471M010F115A |
| | 560 | 8 | 11.5 | 170 | 550 | KF561M010F115A |

See "PACKAGING INFORMATION" to taped or formed products.

STANDARD RATINGS

Part number shows bulk version with straight leads

| V _R (V) | C _R (μF) | ∅ D (mm) | L (mm) | Z - Max. Impedance +20°C - 100kHz (mΩ) | I _R - Max. Ripple Current +105°C - 100kHz (mA rms) | CapXon Part Number |
|-----------------------|------------------------|-------------|-----------|---|--|--------------------|
| 10 | 560 | 10 | 12.5 | 160 | 635 | KF561M010G125A |
| | 680 | 10 | 12.5 | 110 | 765 | KF681M010G125A |
| | 820 | 10 | 16 | 100 | 890 | KF821M010G160A |
| | 1000 | 10 | 16 | 76 | 1040 | KF102M010G160A |
| | 1200 | 10 | 16 | 67 | 1200 | KF122M010G160A |
| | 1500 | 10 | 20 | 62 | 1400 | KF152M010G200A |
| | 1800 | 10 | 25 | 58 | 1550 | KF182M010G250A |
| | 2200 | 10 | 25 | 52 | 1650 | KF222M010G250A |
| | 2200 | 13 | 20 | 41 | 1750 | KF222M010I200A |
| | 2700 | 13 | 20 | 35 | 1900 | KF272M010I200A |
| | 3300 | 13 | 25 | 31 | 2000 | KF332M010I250A |
| | 4700 | 16 | 25 | 30 | 2100 | KF472M010J250A |
| | 5600 | 16 | 25 | 28 | 2290 | KF562M010J250A |
| | 6800 | 16 | 31.5 | 26 | 2650 | KF682M010J315A |
| | 8200 | 16 | 35.5 | 26 | 2770 | KF822M010J355A |
| 10000 | 18 | 35.5 | 24 | 2850 | KF103M010K355A | |
| 16 | 10 | 5 | 11 | 4700 | 74 | KF100M016C110A |
| | 22 | 5 | 11 | 2600 | 100 | KF220M016C110A |
| | 33 | 5 | 11 | 2000 | 114 | KF330M016C110A |
| | 47 | 5 | 11 | 1100 | 155 | KF470M016C110A |
| | 56 | 5 | 11 | 820 | 180 | KF560M016C110A |
| | 68 | 5 | 11 | 690 | 195 | KF680M016C110A |
| | 100 | 6.3 | 11 | 500 | 265 | KF101M016E110A |
| | 120 | 6.3 | 11 | 470 | 270 | KF121M016E110A |
| | 150 | 6.3 | 11 | 410 | 290 | KF151M016E110A |
| | 180 | 6.3 | 11 | 380 | 315 | KF181M016E110A |
| | 180 | 8 | 11.5 | 340 | 370 | KF181M016F115A |
| | 220 | 8 | 11.5 | 250 | 480 | KF221M016F115A |
| | 270 | 8 | 11.5 | 210 | 520 | KF271M016F115A |
| | 330 | 8 | 11.5 | 156 | 590 | KF331M016F115A |
| | 470 | 10 | 12.5 | 124 | 750 | KF471M016G125A |
| | 560 | 10 | 12.5 | 105 | 785 | KF561M016G125A |
| | 680 | 10 | 16 | 92 | 1100 | KF681M016G160A |
| | 820 | 10 | 16 | 78 | 1180 | KF821M016G160A |
| | 1000 | 10 | 20 | 65 | 1350 | KF102M016G200A |
| | 1200 | 10 | 25 | 61 | 1500 | KF122M016G250A |
| | 1500 | 10 | 30 | 56 | 1600 | KF152M016G300A |
| | 1500 | 13 | 20 | 60 | 1380 | KF152M016I200A |
| | 1800 | 10 | 25 | 50 | 1730 | KF182M016G250A |
| | 1800 | 13 | 20 | 47 | 1800 | KF182M016I200A |
| | 2200 | 13 | 25 | 38 | 2000 | KF222M016I250A |
| 2200 | 13 | 20 | 40 | 1880 | KF222M016I200A | |
| 2700 | 13 | 25 | 33 | 2450 | KF272M016I250A | |

See "PACKAGING INFORMATION" to taped or formed products.

STANDARD RATINGS

Part number shows bulk version with straight leads

| V _R (V) | C _R (μF) | ∅ D (mm) | L (mm) | Z - Max. Impedance +20°C - 100kHz (mΩ) | I _R - Max. Ripple Current +105°C - 100kHz (mA rms) | CapXon Part Number |
|-----------------------|------------------------|-------------|-----------|---|--|--------------------|
| 16 | 3300 | 13 | 30 | 30 | 2640 | KF332M016I300A |
| | 3300 | 16 | 25 | 30 | 2790 | KF332M016J250A |
| | 4700 | 16 | 31.5 | 26 | 2880 | KF472M016J315A |
| | 5600 | 16 | 35.5 | 25 | 2990 | KF562M016J355A |
| | 6800 | 18 | 35.5 | 24 | 3200 | KF682M016K355A |
| | 8200 | 18 | 35.5 | 24 | 3320 | KF822M016K355A |
| | 10000 | 18 | 40 | 24 | 3550 | KF103M016K400A |
| 25 | 4.7 | 5 | 11 | 3950 | 68 | KF4R7M025C110A |
| | 5.6 | 5 | 11 | 3250 | 75 | KF5R6M025C110A |
| | 6.8 | 5 | 11 | 2980 | 80 | KF6R8M025C110A |
| | 10 | 5 | 11 | 2560 | 85 | KF100M025C110A |
| | 22 | 5 | 11 | 1950 | 125 | KF220M025C110A |
| | 33 | 5 | 11 | 1420 | 155 | KF330M025C110A |
| | 47 | 5 | 11 | 1100 | 190 | KF470M025C110A |
| | 47 | 6.3 | 11 | 1000 | 220 | KF470M025E110A |
| | 56 | 6.3 | 11 | 790 | 250 | KF560M025E110A |
| | 68 | 6.3 | 11 | 650 | 280 | KF680M025E110A |
| | 100 | 6.3 | 11 | 350 | 370 | KF101M025E110A |
| | 120 | 6.3 | 11 | 330 | 380 | KF121M025E110A |
| | 150 | 8 | 11.5 | 310 | 410 | KF151M025F115A |
| | 180 | 8 | 11.5 | 250 | 455 | KF181M025F115A |
| | 220 | 8 | 11.5 | 150 | 550 | KF221M025F115A |
| | 270 | 10 | 12.5 | 125 | 720 | KF271M025G125A |
| | 330 | 10 | 12.5 | 114 | 820 | KF331M025G125A |
| | 470 | 10 | 16 | 76 | 1200 | KF471M025G160A |
| | 560 | 10 | 16 | 72 | 1250 | KF561M025G160A |
| | 680 | 10 | 20 | 65 | 1320 | KF681M025G200A |
| | 820 | 10 | 20 | 52 | 1400 | KF821M025G200A |
| | 820 | 10 | 25 | 52 | 1530 | KF821M025G250A |
| | 1000 | 13 | 20 | 45 | 1650 | KF102M025I200A |
| | 1200 | 13 | 25 | 41 | 1980 | KF122M025I250A |
| | 1500 | 13 | 25 | 38 | 2210 | KF152M025I250A |
| | 1800 | 16 | 25 | 36 | 2510 | KF182M025J250A |
| | 2200 | 16 | 25 | 35 | 2650 | KF222M025J250A |
| | 2700 | 16 | 25 | 31 | 2820 | KF272M025J250A |
| 3300 | 16 | 31.5 | 26 | 3240 | KF332M025J315A | |
| 4700 | 16 | 35.5 | 24 | 3650 | KF472M025J355A | |
| 5600 | 18 | 35.5 | 24 | 3720 | KF562M025K355A | |
| 6800 | 18 | 40 | 24 | 3850 | KF682M025K400A | |
| 35 | 4.7 | 5 | 11 | 3650 | 85 | KF4R7M035C110A |
| | 5.6 | 5 | 11 | 3090 | 92 | KF5R6M035C110A |
| | 6.8 | 5 | 11 | 2820 | 97 | KF6R8M035C110A |
| | 10 | 5 | 11 | 2370 | 105 | KF100M035C110A |

See "PACKAGING INFORMATION" to taped or formed products.

STANDARD RATINGS

Part number shows bulk version with straight leads

| V _R (V) | C _R (μF) | ∅ D (mm) | L (mm) | Z - Max. Impedance +20°C • 100kHz (mΩ) | I _R - Max. Ripple Current +105°C • 100kHz (mA rms) | CapXon Part Number |
|-----------------------|------------------------|-------------|-----------|---|--|--------------------|
| 35 | 22 | 5 | 11 | 1500 | 150 | KF220M035C110A |
| | 33 | 5 | 11 | 1210 | 180 | KF330M035C110A |
| | 47 | 6.3 | 11 | 800 | 280 | KF470M035E110A |
| | 56 | 6.3 | 11 | 640 | 310 | KF560M035E110A |
| | 68 | 8 | 11.5 | 520 | 350 | KF680M035F115A |
| | 100 | 8 | 11.5 | 250 | 450 | KF101M035F115A |
| | 120 | 8 | 11.5 | 220 | 510 | KF121M035F115A |
| | 150 | 8 | 11.5 | 191 | 540 | KF151M035F115A |
| | 180 | 10 | 12.5 | 172 | 650 | KF181M035G125A |
| | 220 | 10 | 12.5 | 114 | 750 | KF221M035G125A |
| | 270 | 10 | 16 | 95 | 910 | KF271M035G160A |
| | 330 | 10 | 16 | 79 | 1050 | KF331M035G160A |
| | 470 | 10 | 20 | 65 | 1200 | KF471M035G200A |
| | 560 | 10 | 25 | 61 | 1500 | KF561M035G250A |
| | 680 | 13 | 20 | 56 | 1570 | KF681M035I200A |
| | 820 | 13 | 20 | 48 | 1700 | KF821M035I200A |
| | 1000 | 13 | 25 | 42 | 1900 | KF102M035I250A |
| | 1200 | 13 | 30 | 39 | 2130 | KF122M035I300A |
| | 1500 | 16 | 25 | 36 | 2270 | KF152M035J250A |
| | 1800 | 16 | 31.5 | 35 | 2700 | KF182M035J315A |
| 2200 | 16 | 31.5 | 34 | 2780 | KF222M035J315A | |
| 2700 | 16 | 35.5 | 29 | 2850 | KF272M035J355A | |
| 3300 | 18 | 35.5 | 26 | 3100 | KF332M035K355A | |
| 4700 | 18 | 40 | 24 | 3500 | KF472M035K400A | |
| 50 | 1 | 5 | 11 | 4000 | 40 | KF010M050C110A |
| | 2.2 | 5 | 11 | 2800 | 55 | KF2R2M050C110A |
| | 3.3 | 5 | 11 | 2200 | 60 | KF3R3M050C110A |
| | 4.7 | 5 | 11 | 2000 | 90 | KF4R7M050C110A |
| | 5.6 | 5 | 11 | 1930 | 105 | KF5R6M050C110A |
| | 6.8 | 5 | 11 | 1890 | 110 | KF6R8M050C110A |
| | 10 | 5 | 11 | 1820 | 120 | KF100M050C110A |
| | 22 | 6.3 | 11 | 1250 | 150 | KF220M050E110A |
| | 33 | 6.3 | 11 | 800 | 250 | KF330M050E110A |
| | 47 | 6.3 | 11 | 650 | 290 | KF470M050E110A |
| | 56 | 8 | 11.5 | 490 | 310 | KF560M050F115A |
| | 68 | 8 | 11.5 | 330 | 375 | KF680M050F115A |
| | 100 | 10 | 12.5 | 170 | 480 | KF101M050G125A |
| | 120 | 10 | 12.5 | 156 | 530 | KF121M050G125A |
| | 150 | 10 | 12.5 | 132 | 590 | KF151M050G125A |
| | 180 | 10 | 16 | 114 | 860 | KF181M050G160A |
| 220 | 10 | 16 | 96 | 930 | KF221M050G160A | |
| 270 | 10 | 20 | 78 | 1060 | KF271M050G200A | |

See "PACKAGING INFORMATION" to taped or formed products.

STANDARD RATINGS

Part number shows bulk version with straight leads

| V _R (V) | C _R (μF) | ∅ D (mm) | L (mm) | Z - Max. Impedance +20°C - 100kHz (mΩ) | I _R - Max. Ripple Current +105°C - 100kHz (mA rms) | CapXon Part Number |
|-----------------------|------------------------|-------------|-----------|---|--|--------------------|
| 50 | 330 | 10 | 25 | 65 | 1150 | KF331M050G250A |
| | 470 | 13 | 20 | 55 | 1590 | KF471M050I200A |
| | 560 | 13 | 20 | 50 | 1740 | KF561M050I200A |
| | 680 | 13 | 25 | 44 | 1930 | KF681M050I250A |
| | 820 | 13 | 30 | 39 | 2100 | KF821M050I300A |
| | 1000 | 16 | 25 | 36 | 2300 | KF102M050J250A |
| | 1200 | 16 | 31.5 | 36 | 2650 | KF122M050J315A |
| | 1500 | 16 | 35.5 | 34 | 2750 | KF152M050J355A |
| | 1800 | 16 | 35.5 | 34 | 2850 | KF182M050J355A |
| | 2200 | 18 | 35.5 | 32 | 3040 | KF222M050K355A |
| | 2700 | 18 | 40 | 27 | 3070 | KF272M050K400A |
| 3300 | 18 | 40 | 25 | 3100 | KF332M050K400A | |
| 63 | 1 | 5 | 11 | 4000 | 33 | KF010M063C110A |
| | 2.2 | 5 | 11 | 2800 | 45 | KF2R2M063C110A |
| | 3.3 | 5 | 11 | 2200 | 58 | KF3R3M063C110A |
| | 4.7 | 5 | 11 | 2000 | 65 | KF4R7M063C110A |
| | 5.6 | 5 | 11 | 1900 | 95 | KF5R6M063C110A |
| | 6.8 | 5 | 11 | 1820 | 100 | KF6R8M063C110A |
| | 10 | 5 | 11 | 1750 | 110 | KF100M063C110A |
| | 22 | 6.3 | 11 | 800 | 180 | KF220M063E110A |
| | 33 | 8 | 11.5 | 610 | 270 | KF330M063F115A |
| | 47 | 8 | 11.5 | 560 | 300 | KF470M063F115A |
| | 56 | 8 | 11.5 | 380 | 330 | KF560M063F115A |
| | 68 | 10 | 12.5 | 210 | 480 | KF680M063G125A |
| | 100 | 10 | 16 | 140 | 610 | KF101M063G160A |
| | 120 | 10 | 16 | 130 | 620 | KF121M063G160A |
| | 150 | 10 | 16 | 110 | 700 | KF151M063G160A |
| | 180 | 10 | 20 | 100 | 800 | KF181M063G200A |
| | 220 | 10 | 20 | 80 | 920 | KF221M063G200A |
| | 270 | 13 | 20 | 65 | 1150 | KF271M063I200A |
| | 330 | 13 | 20 | 55 | 1250 | KF331M063I200A |
| | 470 | 13 | 25 | 53 | 1620 | KF471M063I250A |
| | 560 | 13 | 25 | 49 | 1680 | KF561M063I250A |
| | 680 | 13 | 30 | 43 | 1950 | KF681M063I300A |
| | 820 | 16 | 25 | 38 | 2150 | KF821M063J250A |
| 1000 | 16 | 31.5 | 34 | 2350 | KF102M063J315A | |
| 1200 | 16 | 35.5 | 32 | 2550 | KF122M063J355A | |
| 1500 | 18 | 35.5 | 31 | 2710 | KF152M063K355A | |
| 1800 | 18 | 40 | 27 | 3000 | KF182M063K400A | |
| 80 | 1 | 5 | 11 | 4300 | 24 | KF010M080C110A |
| | 2.2 | 5 | 11 | 3200 | 36 | KF2R2M080C110A |

See "PACKAGING INFORMATION" to taped or formed products.

STANDARD RATINGS

Part number shows bulk version with straight leads

| V _R (V) | C _R (μF) | ∅ D (mm) | L (mm) | Z - Max. Impedance +20°C - 100kHz (mΩ) | I _R - Max. Ripple Current +105°C - 100kHz (mA rms) | CapXon Part Number |
|-----------------------|------------------------|-------------|-----------|---|--|--------------------|
| 80 | 3.3 | 5 | 11 | 2700 | 47 | KF3R3M080C110A |
| | 4.7 | 5 | 11 | 2500 | 63 | KF4R7M080C110A |
| | 5.6 | 5 | 11 | 2300 | 85 | KF5R6M080C110A |
| | 6.8 | 5 | 11 | 1850 | 92 | KF6R8M080C110A |
| | 10 | 5 | 11 | 1700 | 105 | KF100M080C110A |
| | 22 | 6.3 | 11 | 830 | 175 | KF220M080E110A |
| | 33 | 8 | 11.5 | 610 | 280 | KF330M080F115A |
| | 47 | 8 | 11.5 | 550 | 310 | KF470M080F115A |
| | 56 | 8 | 11.5 | 410 | 360 | KF560M080F115A |
| | 68 | 8 | 16 | 280 | 400 | KF680M080F160A |
| | 100 | 8 | 20 | 220 | 500 | KF101M080F200A |
| | 120 | 10 | 16 | 180 | 580 | KF121M080G160A |
| | 150 | 10 | 20 | 150 | 680 | KF151M080G200A |
| | 180 | 10 | 20 | 112 | 800 | KF181M080G200A |
| | 220 | 13 | 20 | 90 | 900 | KF221M080I200A |
| | 270 | 13 | 20 | 95 | 1080 | KF271M080I200A |
| | 330 | 13 | 25 | 85 | 1210 | KF331M080I250A |
| | 470 | 16 | 25 | 70 | 1500 | KF471M080J250A |
| | 560 | 16 | 25 | 62 | 1640 | KF561M080J250A |
| | 680 | 18 | 25 | 59 | 1680 | KF681M080K250A |
| 820 | 18 | 31.5 | 56 | 1780 | KF821M080K315A | |
| 1000 | 18 | 31.5 | 45 | 1850 | KF102M080K315A | |
| 1200 | 18 | 35.5 | 42 | 1960 | KF122M080K355A | |
| 1500 | 18 | 40 | 36 | 2160 | KF152M080K400A | |
| 100 | 1 | 5 | 11 | 4400 | 30 | KF010M100C110A |
| | 2.2 | 5 | 11 | 3300 | 42 | KF2R2M100C110A |
| | 3.3 | 5 | 11 | 2800 | 55 | KF3R3M100C110A |
| | 4.7 | 5 | 11 | 2600 | 72 | KF4R7M100C110A |
| | 5.6 | 5 | 11 | 2330 | 100 | KF5R6M100C110A |
| | 6.8 | 6.3 | 11 | 1950 | 115 | KF6R8M100E110A |
| | 10 | 6.3 | 11 | 1770 | 130 | KF100M100E110A |
| | 22 | 8 | 11.5 | 850 | 220 | KF220M100F115A |
| | 33 | 10 | 12.5 | 690 | 320 | KF330M100G125A |
| | 47 | 10 | 12.5 | 580 | 370 | KF470M100G125A |
| | 56 | 10 | 12.5 | 430 | 400 | KF560M100G125A |
| | 56 | 10 | 16 | 420 | 440 | KF560M100G160A |
| | 68 | 10 | 16 | 350 | 470 | KF680M100G160A |
| | 100 | 10 | 25 | 300 | 560 | KF101M100G250A |
| | 120 | 10 | 25 | 220 | 660 | KF121M100G250A |
| | 150 | 13 | 20 | 174 | 780 | KF151M100I200A |
| | 180 | 13 | 20 | 142 | 820 | KF181M100I200A |
| 220 | 13 | 25 | 130 | 950 | KF221M100I250A | |

See "PACKAGING INFORMATION" to taped or formed products.

STANDARD RATINGS

Part number shows bulk version with straight leads

| V _R (V) | C _R (μF) | ∅ D (mm) | L (mm) | Z - Max. Impedance +20°C - 100kHz (mΩ) | I _R - Max. Ripple Current +105°C - 100kHz (mA rms) | CapXon Part Number |
|-----------------------|------------------------|-------------|-----------|---|--|--------------------|
| 100 | 270 | 13 | 30 | 110 | 1120 | KF271M100I300A |
| | 330 | 16 | 25 | 100 | 1440 | KF331M100J250A |
| | 470 | 16 | 31.5 | 90 | 1650 | KF471M100J315A |
| | 560 | 16 | 35.5 | 85 | 1720 | KF561M100J355A |
| | 680 | 18 | 35.5 | 80 | 1790 | KF681M100K355A |
| | 820 | 18 | 35.5 | 71 | 1840 | KF821M100K355A |
| | 1000 | 18 | 40 | 66 | 1930 | KF102M100K400A |
| 160 | 1 | 6.3 | 11 | 12000 | 45 | KF010M160E110A |
| | 2.2 | 6.3 | 11 | 9900 | 55 | KF2R2M160E110A |
| | 3.3 | 8 | 11.5 | 4310 | 70 | KF3R3M160F115A |
| | 4.7 | 8 | 11.5 | 4160 | 80 | KF4R7M160F115A |
| | 5.6 | 10 | 12.5 | 3610 | 91 | KF5R6M160G125A |
| | 6.8 | 10 | 16 | 3120 | 100 | KF6R8M160G160A |
| | 10 | 10 | 12.5 | 3000 | 126 | KF100M160G125A |
| | 10 | 10 | 16 | 2690 | 140 | KF100M160G160A |
| | 22 | 10 | 16 | 1300 | 205 | KF220M160G160A |
| | 33 | 10 | 20 | 1100 | 260 | KF330M160G200A |
| | 47 | 10 | 20 | 1650 | 276 | KF470M160G200A |
| | 47 | 13 | 20 | 910 | 320 | KF470M160I200A |
| | 56 | 13 | 20 | 670 | 340 | KF560M160I200A |
| | 56 | 13 | 25 | 660 | 370 | KF560M160I250A |
| | 68 | 13 | 25 | 560 | 450 | KF680M160I250A |
| | 100 | 16 | 25 | 470 | 540 | KF101M160J250A |
| | 120 | 16 | 25 | 350 | 560 | KF121M160J250A |
| | 150 | 16 | 31.5 | 260 | 710 | KF151M160J315A |
| | 180 | 16 | 35.5 | 220 | 760 | KF181M160J355A |
| | 220 | 16 | 35.5 | 190 | 820 | KF221M160J355A |
| 270 | 18 | 35.5 | 180 | 990 | KF271M160K355A | |
| 330 | 18 | 40 | 160 | 1180 | KF331M160K400A | |
| 200 | 1 | 6.3 | 11 | 7760 | 45 | KF010M200E110A |
| | 2.2 | 6.3 | 11 | 5180 | 55 | KF2R2M200E110A |
| | 3.3 | 8 | 11.5 | 4250 | 71 | KF3R3M200F115A |
| | 4.7 | 8 | 11.5 | 5000 | 78 | KF4R7M200F115A |
| | 4.7 | 10 | 12.5 | 4120 | 85 | KF4R7M200G125A |
| | 5.6 | 8 | 11.5 | 4500 | 90 | KF5R6M200F115A |
| | 5.6 | 10 | 12.5 | 3550 | 95 | KF5R6M200G125A |
| | 6.8 | 8 | 16 | 3250 | 115 | KF6R8M200F160A |
| | 6.8 | 10 | 16 | 2710 | 140 | KF6R8M200G160A |
| | 10 | 8 | 11.5 | 3750 | 115 | KF100M200F115A |
| | 10 | 10 | 16 | 2020 | 150 | KF100M200G160A |

See "PACKAGING INFORMATION" to taped or formed products.

STANDARD RATINGS

Part number shows bulk version with straight leads

| V _R (V) | C _R (μF) | ∅ D (mm) | L (mm) | Z - Max. Impedance +20°C - 100kHz (mΩ) | I _R - Max. Ripple Current +105°C - 100kHz (mA rms) | CapXon Part Number |
|-----------------------|------------------------|-------------|-----------|---|--|--------------------|
| 200 | 22 | 10 | 16 | 1800 | 186 | KF220M200G160A |
| | 22 | 10 | 20 | 1400 | 205 | KF220M200G200A |
| | 33 | 10 | 20 | 1000 | 280 | KF330M200G200A |
| | 33 | 13 | 20 | 800 | 330 | KF330M200I200A |
| | 47 | 10 | 20 | 720 | 311 | KF470M200G200A |
| | 47 | 13 | 20 | 650 | 360 | KF470M200I200A |
| | 47 | 13 | 25 | 620 | 400 | KF470M200I250A |
| | 56 | 13 | 20 | 450 | 430 | KF560M200I200A |
| | 68 | 13 | 25 | 420 | 480 | KF680M200I250A |
| | 68 | 16 | 25 | 350 | 540 | KF680M200J250A |
| | 100 | 16 | 25 | 300 | 780 | KF101M200J250A |
| | 100 | 16 | 31.5 | 280 | 820 | KF101M200J315A |
| | 120 | 16 | 25 | 280 | 740 | KF121M200J250A |
| | 120 | 16 | 31.5 | 260 | 830 | KF121M200J315A |
| | 150 | 16 | 31.5 | 250 | 840 | KF151M200J315A |
| | 150 | 16 | 35.5 | 230 | 860 | KF151M200J355A |
| | 180 | 18 | 31.5 | 200 | 920 | KF181M200K315A |
| | 220 | 18 | 35.5 | 190 | 1050 | KF221M200K355A |
| 220 | 18 | 40 | 160 | 1090 | KF221M200K400A | |
| 250 | 1 | 6.3 | 11 | 6540 | 50 | KF010M250E110A |
| | 2.2 | 8 | 11.5 | 4120 | 72 | KF2R2M250F115A |
| | 3.3 | 8 | 11.5 | 3850 | 75 | KF3R3M250F115A |
| | 4.7 | 8 | 11.5 | 3500 | 85 | KF4R7M250F115A |
| | 4.7 | 10 | 12.5 | 2950 | 100 | KF4R7M250G125A |
| | 5.6 | 8 | 11.5 | 2930 | 95 | KF5R6M250F115A |
| | 5.6 | 10 | 12.5 | 2900 | 105 | KF5R6M250G125A |
| | 6.8 | 8 | 16 | 2800 | 124 | KF6R8M250F160A |
| | 6.8 | 10 | 12.5 | 2800 | 126 | KF6R8M250G125A |
| | 6.8 | 10 | 16 | 1860 | 140 | KF6R8M250G160A |
| | 10 | 8 | 16 | 1800 | 141 | KF100M250F160A |
| | 10 | 10 | 12.5 | 1750 | 144 | KF100M250G125A |
| | 10 | 10 | 16 | 1600 | 160 | KF100M250G160A |
| | 22 | 10 | 16 | 1400 | 190 | KF220M250G160A |
| | 22 | 10 | 20 | 1300 | 210 | KF220M250G200A |
| | 33 | 10 | 20 | 1400 | 224 | KF330M250G200A |
| | 33 | 10 | 25 | 1250 | 248 | KF330M250G250A |
| | 33 | 13 | 20 | 900 | 310 | KF330M250I200A |
| | 47 | 13 | 20 | 600 | 375 | KF470M250I200A |
| | 47 | 13 | 25 | 450 | 405 | KF470M250I250A |
| | 56 | 13 | 25 | 420 | 420 | KF560M250I250A |
| | 68 | 16 | 25 | 380 | 490 | KF680M250J250A |
| | 100 | 16 | 31.5 | 270 | 675 | KF101M250J315A |

See "PACKAGING INFORMATION" to taped or formed products.

STANDARD RATINGS

Part number shows bulk version with straight leads

| V _R (V) | C _R (μF) | ∅ D (mm) | L (mm) | Z - Max. Impedance +20°C - 100kHz (mΩ) | I _R - Max. Ripple Current +105°C - 100kHz (mA rms) | CapXon Part Number |
|-----------------------|------------------------|-------------|-----------|---|--|--------------------|
| 250 | 120 | 16 | 31.5 | 260 | 692 | KF121M250J315A |
| | 120 | 16 | 35.5 | 250 | 730 | KF121M250J355A |
| | 150 | 16 | 35.5 | 240 | 750 | KF151M250J355A |
| | 150 | 18 | 31.5 | 230 | 750 | KF151M250K315A |
| | 180 | 18 | 35.5 | 210 | 830 | KF181M250K355A |
| | 220 | 18 | 31.5 | 200 | 850 | KF221M250K315A |
| | 220 | 18 | 40 | 190 | 910 | KF221M250K400A |
| 350 | 1 | 6.3 | 11 | 7900 | 50 | KF010M350E110A |
| | 1 | 8 | 11.5 | 6350 | 58 | KF010M350F115A |
| | 2.2 | 8 | 11.5 | 5300 | 75 | KF2R2M350F115A |
| | 2.2 | 10 | 12.5 | 4020 | 86 | KF2R2M350G125A |
| | 3.3 | 10 | 12.5 | 3800 | 90 | KF3R3M350G125A |
| | 3.3 | 10 | 16 | 3520 | 100 | KF3R3M350G160A |
| | 4.7 | 10 | 16 | 3130 | 118 | KF4R7M350G160A |
| | 4.7 | 10 | 20 | 2770 | 130 | KF4R7M350G200A |
| | 5.6 | 10 | 16 | 2760 | 120 | KF5R6M350G160A |
| | 5.6 | 10 | 20 | 2580 | 132 | KF5R6M350G200A |
| | 6.8 | 10 | 16 | 2430 | 148 | KF6R8M350G160A |
| | 6.8 | 10 | 25 | 1650 | 180 | KF6R8M350G250A |
| | 10 | 10 | 16 | 1640 | 165 | KF100M350G160A |
| | 10 | 10 | 25 | 1350 | 200 | KF100M350G250A |
| | 22 | 13 | 20 | 1220 | 220 | KF220M350I200A |
| | 33 | 13 | 20 | 1020 | 263 | KF330M350I200A |
| | 33 | 13 | 25 | 860 | 290 | KF330M350I250A |
| | 47 | 16 | 25 | 760 | 389 | KF470M350J250A |
| | 47 | 16 | 31.5 | 620 | 430 | KF470M350J315A |
| | 56 | 16 | 35.5 | 600 | 460 | KF560M350J355A |
| | 68 | 16 | 31.5 | 570 | 475 | KF680M350J315A |
| | 100 | 16 | 35.5 | 560 | 481 | KF101M350J355A |
| | 100 | 18 | 31.5 | 560 | 487 | KF101M350K315A |
| 100 | 18 | 35.5 | 550 | 513 | KF101M350K355A | |
| 120 | 18 | 35.5 | 540 | 525 | KF121M350K355A | |
| 120 | 18 | 40 | 520 | 560 | KF121M350K400A | |
| 150 | 18 | 40 | 500 | 590 | KF151M350K400A | |
| 400 | 1 | 8 | 11.5 | 16500 | 36 | KF010M400F115A |
| | 2.2 | 8 | 11.5 | 13000 | 65 | KF2R2M400F115A |
| | 2.2 | 10 | 12.5 | 13000 | 76 | KF2R2M400G125A |
| | 3.3 | 8 | 9 | 14000 | 78 | KF3R3M400F090A |
| | 3.3 | 8 | 11.5 | 12000 | 86 | KF3R3M400F115A |
| | 4.7 | 8 | 11.5 | 11000 | 89 | KF4R7M400F115A |
| | 4.7 | 10 | 12.5 | 10000 | 105 | KF4R7M400G125A |

See "PACKAGING INFORMATION" to taped or formed products.

STANDARD RATINGS

Part number shows bulk version with straight leads

| V _R (V) | C _R (μF) | ∅ D (mm) | L (mm) | Z - Max. Impedance +20°C - 100kHz (mΩ) | I _R - Max. Ripple Current +105°C - 100kHz (mA rms) | CapXon Part Number |
|-----------------------|------------------------|-------------|-----------|---|--|--------------------|
| 400 | 5.6 | 8 | 16 | 8000 | 105 | KF5R6M400F160A |
| | 5.6 | 10 | 12.5 | 9000 | 120 | KF5R6M400G125A |
| | 6.8 | 10 | 12.5 | 7700 | 144 | KF6R8M400G125A |
| | 6.8 | 10 | 16 | 7500 | 160 | KF6R8M400G160A |
| | 10 | 10 | 14 | 5000 | 201 | KF100M400G140A |
| | 10 | 10 | 16 | 3800 | 213 | KF100M400G160A |
| | 10 | 10 | 20 | 3600 | 235 | KF100M400G200A |
| | 15 | 10 | 20 | 3000 | 240 | KF150M400G200A |
| | 22 | 13 | 16 | 2800 | 268 | KF220M400I160A |
| | 22 | 13 | 20 | 2650 | 295 | KF220M400I200A |
| | 33 | 13 | 20 | 1800 | 399 | KF330M400I200A |
| | 33 | 13 | 25 | 1600 | 440 | KF330M400I250A |
| | 33 | 16 | 20 | 1900 | 459 | KF330M400J200A |
| | 47 | 16 | 20 | 1600 | 539 | KF470M400J200A |
| | 47 | 16 | 25 | 1400 | 580 | KF470M400J250A |
| | 56 | 16 | 25 | 1030 | 587 | KF560M400J250A |
| | 56 | 16 | 31.5 | 850 | 650 | KF560M400J315A |
| | 68 | 16 | 31.5 | 800 | 800 | KF680M400J315A |
| | 68 | 18 | 25 | 760 | 774 | KF680M400K250A |
| | 100 | 18 | 31.5 | 700 | 854 | KF101M400K315A |
| 100 | 18 | 35.5 | 680 | 900 | KF101M400K355A | |
| 120 | 18 | 35.5 | 580 | 930 | KF121M400K355A | |
| 420 | 1 | 8 | 11.5 | 17000 | 38 | KF010M420F115A |
| | 2.2 | 10 | 12.5 | 12100 | 58 | KF2R2M420G125A |
| | 3.3 | 10 | 12.5 | 11000 | 87 | KF3R3M420G125A |
| | 4.7 | 10 | 16 | 8500 | 102 | KF4R7M420G160A |
| | 5.6 | 10 | 16 | 6800 | 109 | KF5R6M420G160A |
| | 6.8 | 10 | 16 | 6000 | 160 | KF6R8M420G160A |
| | 10 | 10 | 20 | 3700 | 180 | KF100M420G200A |
| | 22 | 13 | 25 | 2700 | 330 | KF220M420I250A |
| | 33 | 16 | 25 | 1800 | 480 | KF330M420J250A |
| | 47 | 16 | 31.5 | 1100 | 620 | KF470M420J315A |
| | 56 | 16 | 35.5 | 900 | 670 | KF560M420J355A |
| | 68 | 18 | 31.5 | 800 | 750 | KF680M420K315A |
| 100 | 18 | 35.5 | 700 | 820 | KF101M420K355A | |
| 450 | 1 | 8 | 11.5 | 17350 | 45 | KF010M450F115A |
| | 2.2 | 10 | 16 | 10250 | 65 | KF2R2M450G160A |
| | 3.3 | 10 | 16 | 10000 | 89 | KF3R3M450G160A |
| | 4.7 | 10 | 20 | 5000 | 105 | KF4R7M450G200A |
| | 5.6 | 10 | 20 | 4750 | 110 | KF5R6M450G200A |
| | 6.8 | 10 | 20 | 4050 | 135 | KF6R8M450G200A |

See "PACKAGING INFORMATION" to taped or formed products.


STANDARD RATINGS

Part number shows bulk version with straight leads

| V _R (V) | C _R (μF) | ∅ D (mm) | L (mm) | Z - Max. Impedance +20°C - 100kHz (mΩ) | I _R - Max. Ripple Current +105°C - 100kHz (mA rms) | CapXon Part Number |
|--------------------|---------------------|----------|--------|--|---|--------------------|
| 450 | 10 | 10 | 20 | 7000 | 163 | KF100M450G200A |
| | 10 | 10 | 25 | 3750 | 180 | KF100M450G250A |
| | 10 | 13 | 20 | 6800 | 189 | KF100M450I200A |
| | 22 | 13 | 25 | 2800 | 320 | KF220M450I250A |
| | 33 | 16 | 25 | 2200 | 460 | KF330M450J250A |
| | 33 | 18 | 20 | 2700 | 458 | KF330M450K200A |
| | 47 | 16 | 35.5 | 1050 | 650 | KF470M450J355A |
| | 47 | 18 | 25 | 1650 | 596 | KF470M450K250A |
| | 56 | 18 | 31.5 | 950 | 730 | KF560M450K315A |
| | 68 | 18 | 31.5 | 800 | 721 | KF680M450K315A |
| | 68 | 18 | 35.5 | 750 | 760 | KF680M450K355A |
| | 100 | 18 | 35.5 | 1100 | 825 | KF101M450K355A |
| | 100 | 18 | 40 | 740 | 880 | KF101M450K400A |
| 120 | 18 | 40 | 1000 | 980 | KF121M450K400A | |

See "PACKAGING INFORMATION" to taped or formed products.

DIMENSIONS - All dimensions in mm

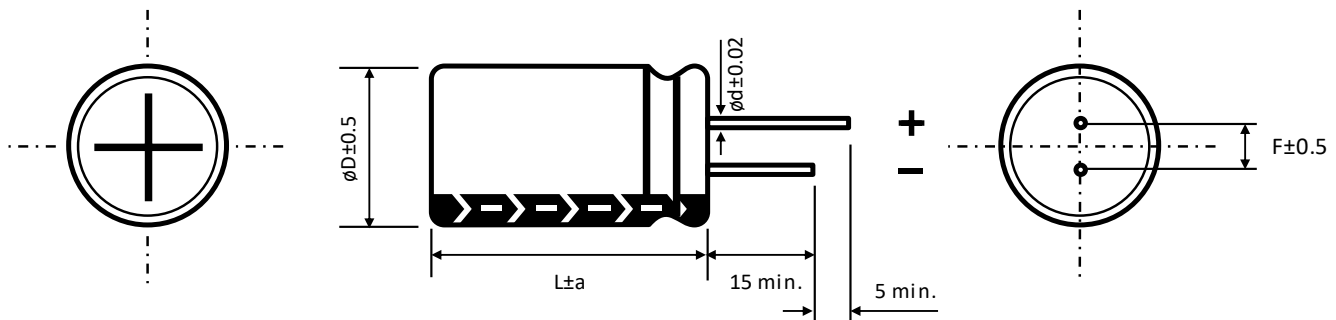

| ∅ D | 5 | 6.3 | 8 | | 10 | 13 | 16 | 18 |
|-----|-----|-----|--------|--------|-----|----|-----|-----|
| F | 2 | 2.5 | 3.5 | | 5 | 5 | 7.5 | 7.5 |
| ∅ d | 0.5 | | L < 20 | L ≥ 20 | 0.6 | | 0.8 | |
| | | | 0.5 | 0.6 | | | | |





| a | ∅ D < 16 | | ∅ D = 16 | | ∅ D = 18 | |
|---|----------|-----|----------------|-------------------|----------------|---------------------|
| | 1.5 | 1.5 | L = 25 to 35.5 | L < 25 and L ≥ 40 | L = 25 to 31.5 | L < 25 and L ≥ 35.5 |
| | | | 1.5 | 2 | 1.5 | 2 |

MULTIPLIER K_f for RIPPLE CURRENT vs. FREQUENCY

| C _R (μF) / Frequency (Hz) | 50/60 | 100/120 | 400 | 1k | 10k | 100k |
|--------------------------------------|-------|---------|------|------|------|------|
| C _R ≤ 10 | 0.47 | 0.59 | 0.76 | 0.85 | 0.97 | 1 |
| 10 < C _R ≤ 100 | 0.52 | 0.62 | 0.8 | 0.89 | 0.97 | 1 |
| 100 < C _R ≤ 1000 | 0.58 | 0.72 | 0.84 | 0.9 | 0.98 | 1 |
| 1000 ≤ C _R | 0.63 | 0.78 | 0.87 | 0.91 | 0.98 | 1 |

PRECAUTIONS, GUIDELINES AND PACKAGING INFORMATION

Unless otherwise agreed in individual specifications, all products are subject to our “General Precautions and Guidelines” as well as our “Packaging Information”. Please refer to the following links in the table.

| | | | |
|---|---|--|---|
|  |  |  |  |
| <p>General Precautions & Guidelines</p> | <p>Packaging Information</p> | <p>3D Models</p> | <p>Reliability Tests</p> |

DISCLAIMER

All product related data (e.g. specification, statements and general information) are subject to change without any notice. It is necessary that the customer observes all product related technical / application information and handling instructions.

CapXon products are designed and manufactured according to severe quality and safety standards. Under no circumstance, CapXon warrants that any CapXon product is suitable for the purposes intended for your application, even CapXon knows the application. It is customer's duty and obligation to check and make sure that CapXon products are suitable for the purposes intended and select the correct and proper CapXon product. Customers are requested to perform a sufficient validation and reliability evaluation to assure needed safety level and reliability performance by suitable designs and to apply proper safeguards (e.g. redundancies, protective circuits).

Particular operating conditions (ambient temperature, ripple current, voltage, thermal resistance, etc.) as well as storage, production or assembly may affect the performance and the lifetime of the capacitor. Please consult CapXon for lifetime estimation, failure mode considerations or worst-case scenarios according to the product technology, product tolerances / deviations or change of the characteristics of the capacitor due to shipment, storage, handling, production and usage.

For aerospace or military application, life-saving, life-sustaining, safety critical applications or any application where failure may cause severe personal injury or death, please consult us before design-in the capacitor in your application.

Except for the written expressed warranties, CapXon does not impliedly, by assumption or whatever else, warrant, undertake, promise any other warranty or guaranty for any CapXon product.

For further information, please visit our website www.capxongroup.com or contact CapXon directly.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Aluminium Electrolytic Capacitors - Radial Leaded](#) category:

Click to view products by [Capxon](#) manufacturer:

Other Similar products are found below :

[LXY50VB4.7M-5X11](#) [RFO-100V471MJ7P#](#) [ECE-A1EGE220](#) [B41041A7226M8](#) [B41044A7157M6](#) [NCD681K10KVY5PF](#)

[NEV1000M25EF-BULK](#) [NEV100M35DC](#) [NEV100M63DE](#) [NEV220M25DD-BULK](#) [NEV.33M100AA](#) [NEV4700M50HB](#) [NEV.47M100AA](#)

[NEVH1.0M250AB](#) [NEVH3.3M250BB](#) [NEVH3.3M450CC](#) [KME50VB100M-8X11.5](#) [SG220M1CSA-0407](#) [ES5107M016AE1DA](#)

[ESMG160ETD102MJ16S](#) [ESX472M16B](#) [227RZS050M](#) [476CKH100MSA](#) [477RZS050M](#) [B41793A9108Q1](#) [UVX1V101KPA1FA](#)

[UVX1V222MHA1CA](#) [KME25VB100M-6.3X11](#) [VTL100S10](#) [VTL470S10](#) [VTL470S16A](#) [511D336M250EK5D](#) [052687X](#) [ECE-A1CF471](#)

[NRE-S560M16V6.3X7TBSTF](#) [RGA221M1CTA-0611G](#) [ERZA630VHN182UP54N](#) [UPL1A331MPH](#) [NEV1000M6.3DE](#) [NEV100M16CB](#)

[NEV100M50DD-BULK](#) [NEV2200M16FF](#) [NEV220M50EE](#) [NEV2.2M50AA](#) [NEV330M63EF](#) [NEV4700M35HI](#) [NEV4.7M100BA](#)

[NEV47M16BA](#) [NEV47M50CB-BULK](#) [NEVH1.0M350AB](#)