


KF Series Low Impedance

Features

- ◆ Used in communication equipments, switching power supply, industrial measuring instruments, etc.
- ◆ Endurance 2000~5000 Hrs at 105°C
- ◆ Safety vent construction design.
- ◆ RoHS Compliant




Specifications

Item	Performance Characteristics																																		
Operating Temperature Range	-40 to +105°C	-25 to +105°C																																	
Rated Voltage Range	6.3 to 100 VDC	160 to 450 VDC																																	
Capacitance Range	0.47 to 15000 µF	0.47 to 470 µF																																	
Capacitance Tolerance	±20%(120Hz,+20°C)																																		
Leakage Current (+20°C,max.)	I ≤ 0.01 CV or 3 (µA) After 2 minutes whichever is greater measured with rated working voltage applied.	I ≤ 0.03 CV (µA) After 2 minutes withrate working voltage applied.																																	
	<table border="1"> <tr> <td>Working Voltage(VDC)</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> <td>100</td> </tr> <tr> <td>D.F. (%)max.</td> <td>18</td> <td>16</td> <td>14</td> <td>12</td> <td>10</td> <td>9</td> <td>8</td> <td>8</td> </tr> </table> <table border="1"> <tr> <td>Working Voltage(VDC)</td> <td>160</td> <td>200</td> <td>250</td> <td>350</td> <td>400</td> <td>420</td> <td>450</td> </tr> <tr> <td>D.F. (%)max.</td> <td>12</td> <td>12</td> <td>12</td> <td>15</td> <td>15</td> <td>17</td> <td>17</td> </tr> </table> <p>For capacitance > 1000 µF, add 2% per another 1000uF.</p>		Working Voltage(VDC)	6.3	10	16	25	35	50	63	100	D.F. (%)max.	18	16	14	12	10	9	8	8	Working Voltage(VDC)	160	200	250	350	400	420	450	D.F. (%)max.	12	12	12	15	15	17
Working Voltage(VDC)	6.3	10	16	25	35	50	63	100																											
D.F. (%)max.	18	16	14	12	10	9	8	8																											
Working Voltage(VDC)	160	200	250	350	400	420	450																												
D.F. (%)max.	12	12	12	15	15	17	17																												
Dissipation Factor (tan δ , at 20°C , 120Hz)	Impedance ratio max																																		
	Working Voltage(VDC)	6.3	10	16	25	35	50	63	100																										
	Z-25°C / Z+20°C	4	3	3	3	3	3	2	2																										
	Z-40°C / Z+20°C	8	6	4	3	3	3	3	3																										
Low Temperature Characteristics (at 120Hz)	Working Voltage(VDC)	160	200	250	350	400	450																												
	Z-25°C / Z+20°C	2	2	3	5	5	6																												
	Z-40°C / Z+20°C	3	6	6	6	6	-																												
	For capacitance > 1000 µF, add 0.5 per another 1000uF for -25°C / +20°C add 1 per another 1000uF for -40°C / +20°C																																		
Endurance	Test conditions Duration time : as right Ambient temperature : +105°C Applied voltage : Rated DC working voltage After test requirement at +20°C Capacitance change : ≤ ±20% of the initial measured value Dissipation factor : ≤ 200% of the initial specified value Leakage current : ≤ The initial specified value	<table border="1"> <tr> <th>D φ</th> <th>Life hours</th> </tr> <tr> <td>5 - 6.3 φ</td> <td>2000</td> </tr> <tr> <td>8 φ</td> <td>3000</td> </tr> <tr> <td>≥ 10 φ</td> <td>5000</td> </tr> </table>		D φ	Life hours	5 - 6.3 φ	2000	8 φ	3000	≥ 10 φ	5000																								
	D φ	Life hours																																	
5 - 6.3 φ	2000																																		
8 φ	3000																																		
≥ 10 φ	5000																																		
		(160-450V : 2000hrs)																																	
Shelf Life	Test conditions Duration time : 1000Hrs Ambient temperature : +105°C Applied voltage : None After test requirement at +20°C: Same limits as Endurance. Pre-treatment for measurements shall be conducted after application of DC working voltage for 30 minutes.																																		

Multiplier for Ripple Current vs. Frequency

CAP(µF)\Frequency(Hz)	50(60)	120	400	1K	10K	50K-100K
CAP ≤ 10	0.47	0.59	0.76	0.85	0.97	1
10 < CAP ≤ 100	0.52	0.62	0.80	0.89	0.97	1
100 < CAP ≤ 1000	0.58	0.72	0.84	0.90	0.98	1
1000 < CAP	0.63	0.78	0.87	0.91	0.98	1

Diagram of Dimensions:(unit:mm)

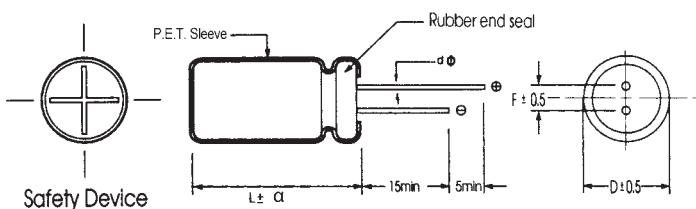

D φ	5	6.3	8	10	13	16	18	22
F	2.0	2.5	3.5	5.0	5.0	7.5	7.5	10
d φ	0.5		L < 20 0.5	L ≥ 20 0.6	0.6		0.8	
α	D < 18	D = 18		D > 18				
	1.5	L < 35.5	L ≥ 35.5	1.5	2.0	2.0		

Case Size

		ϕ DxL(mm)								
WV	Cap(μ F)	6.3			10			16		
		Size	Ripple	Impedance	Size	Ripple	Impedance	Size	Ripple	Impedance
10								5x11	74	4.7
22					5x11	98	2.7	5x11	100	2.6
33					5x11	100	2.6	5x11	114	2
47					5x11	150	1.34	5x11	155	1.1
56					5x11	160	1.23	5x11	180	0.82
68					5x11	170	1.05	5x11	195	0.69
100		5x11	170	1.00	5x11	210	0.8	6.3x11	265	0.5
120		5x11	175	0.92	6.3x11	250	0.75	6.3x11	270	0.47
150		6.3x11	220	0.81	6.3x11	290	0.61	6.3x11	290	0.41
		5x11	185	0.90						
180		6.3x11	240	0.76	6.3x11	320	0.46	8x11.5	370	0.34
								6.3x11	315	0.38
220		6.3x11	310	0.65	6.3x11	340	0.35	8x11.5	480	0.25
270		6.3x11	340	0.54	8x11.5	400	0.3	8x11.5	520	0.21
330		8x11.5	390	0.42	8x11.5	460	0.27	8x11.5	590	0.156
470		8x11.5	450	0.25	8x11.5	580	0.25	10x12.5	750	0.124
560		8x11.5	490	0.23	10x12.5	635	0.16	10x12.5	785	0.105
					8x11.5	550	0.17			
680		8x11.5	550	0.21	10x12.5	765	0.11	10x16	1100	0.092
820		8x16	620	0.20	10x16	890	0.1	10x16	1180	0.078
1000		10x12.5	770	0.17	10x16	1040	0.076	10x20	1350	0.065
		8x16	750	0.18						
1200		10x16	860	0.16	10x16	1200	0.067	10x25	1500	0.061
1500		10x16	1100	0.14	10x20	1400	0.062	10x30	1600	0.056
								13x20	1380	0.06
1800		10x20	1250	0.11	10x25	1550	0.058	13x20	1800	0.047
								10x25	1730	0.05
2200		10x20	1380	0.090	13x20	1750	0.041	13x25	2000	0.038
		10x25	1470	0.095	10x25	1650	0.052	13x20	1880	0.04
2700		10x25	1490	0.075	13x20	1900	0.035	13x25	2450	0.033
		13x20	1550	0.075						
3300		13x20	1650	0.036	13x25	2000	0.031	16x25	2790	0.030
								13x30	2640	0.030
4700		13x30	2100	0.036	16x25	2100	0.030	16x31.5	2880	0.026
		13x25	1900	0.040						
5600		13x30	2160	0.034	16x25	2290	0.028	16x35.5	2990	0.025
6800		16x25	2350	0.032	16x31.5	2650	0.026	18x35.5	3200	0.024
8200		16x31.5	2550	0.027	16x35.5	2770	0.026	18x35.5	3320	0.024
10000		16x35.5	2700	0.024	18x35.5	2850	0.024	18x41	3550	0.024
15000		18x35.5	2950	0.023						

Ripple Current (mA, rms) at 105°C 100KHz
 Max Impedance (Ω) at 20°C 100KHz

WV Cap(μ F)	25			35			50		
	Size	Ripple	Impedance	Size	Ripple	Impedance	Size	Ripple	Impedance
0.47							5x11	25	5.4
1							5x11	40	4
2.2							5x11	55	2.8
3.3							5x11	60	2.2
4.7	5x11	68	3.95	5x11	85	3.65	5x11	90	2
5.6	5x11	75	3.25	5x11	92	3.09	5x11	105	1.93
6.8	5x11	80	2.98	5x11	97	2.82	5x11	110	1.89
10	5x11	85	2.56	5x11	105	2.37	5x11	120	1.82
22	5x11	125	1.95	5x11	150	1.5	6.3x11	150	1.25
33	5x11	155	1.42	5x11	180	1.21	6.3x11	250	0.8
47	5x11	190	1.10	6.3x11	280	0.8	6.3x11	290	0.65
	6.3x11	220	1.00						
56	6.3x11	250	0.79	6.3x11	310	0.64	8x11.5	310	0.49
68	6.3x11	280	0.65	8x11.5	350	0.52	8x11.5	375	0.33
100	6.3x11	370	0.35	8x11.5	450	0.25	10x12.5	480	0.17
120	6.3x11	380	0.33	8x11.5	510	0.22	10x12.5	530	0.156
150	8x11.5	410	0.31	8x11.5	540	0.191	10x12.5	590	0.132
180	8x11.5	455	0.25	10x12.5	650	0.172	10x16	860	0.114
220	8x11.5	550	0.15	10x12.5	750	0.114	10x16	930	0.096
270	10x12.5	720	0.125	10x16	910	0.095	10x20	1060	0.078
330	10x12.5	820	0.114	10x16	1050	0.079	10x25	1150	0.065
470	10x16	1200	0.076	10x20	1200	0.065	13x20	1590	0.055
560	10x16	1250	0.072	10x25	1500	0.061	13x20	1740	0.05
680	10x20	1320	0.065	13x20	1570	0.056	13x25	1930	0.044
820	10x20	1400	0.052	13x20	1700	0.048	13x30	2100	0.039
	10x25	1530	0.052						
1000	13x20	1650	0.045	13x25	1900	0.042	16x25	2300	0.036
1200	13x25	1980	0.041	13x30	2130	0.039	16x31.5	2650	0.036
1500	13x25	2210	0.038	16x25	2270	0.036	16x35.5	2750	0.034
1800	16x25	2510	0.036	16x31.5	2700	0.035	16x35.5	2850	0.034
2200	16x25	2650	0.035	16x31.5	2780	0.034	18x35.5	3040	0.032
2700	16x25	2820	0.031	16x35.5	2850	0.029	18x41	3070	0.027
3300	16x31.5	3240	0.026	18x35.5	3100	0.026	18x41	3100	0.025
4700	16x35.5	3650	0.024	18x41	3500	0.024			
5600	18x35.5	3720	0.024						
6800	18x41	3850	0.024						

ϕ DxL (mm)

Ripple Current (mA, rms) at 105°C 100KHz
 Max Impedance (Ω) at 20°C 100KHz

φ DxL(mm)

WV Cap(μF)	63			100			160		
	Size	Ripple	Impedance	Size	Ripple	Impedance	Size	Ripple	Impedance
0.47	5x11	25	5.4	5x11	20	5.9	5x11	36	18.5
1	5x11	33	4	5x11	30	4.4	6.3x11	45	12.0
2.2	5x11	45	2.8	5x11	42	3.3	6.3x11	55	9.9
3.3	5x11	58	2.2	5x11	55	2.8	8x11.5	70	4.31
4.7	5x11	65	2	5x11	72	2.6	8x11.5	80	4.16
5.6	5x11	95	1.9	5x11	100	2.33	10x12.5	91	3.61
6.8	5x11	100	1.82	6.3x11	115	1.95	10x16	100	3.12
10							10x12.5	126	3
	5x11	110	1.75	6.3x11	130	1.77	10x16	140	2.69
22	6.3x11	180	0.80	8x11.5	220	0.85	10x16	205	1.3
33	8x11.5	270	0.61	10x12.5	320	0.69	10x20	260	1.1
47							10x20	276	1.65
	8x11.5	300	0.56	10x12.5	370	0.58	13x20	320	0.91
56	8x11.5	330	0.38	10x12.5	400	0.43	13x20	340	0.67
				10x16	440	0.42	13x25	370	0.66
68	10x12.5	480	0.21	10x16	470	0.35	13x25	450	0.56
100	10x16	610	0.14	10x25	560	0.3	16x25	540	0.47
120	10x16	620	0.13	10x25	660	0.22	16x25	560	0.35
150	10x16	700	0.11	13x20	780	0.174	16x31.5	710	0.26
180	10x20	800	0.10	13x20	820	0.142	16x35.5	760	0.22
220	10x20	920	0.080	13x25	950	0.13	16x35.5	820	0.19
270	13x20	1150	0.065	13x30	1120	0.11	18x35.5	990	0.18
330	13x20	1250	0.055	16x25	1440	0.1	18x41	1180	0.16
470	13x25	1620	0.053	16x31.5	1650	0.09			
560	13x25	1680	0.049	16x35.5	1720	0.085			
680	13x30	1950	0.043	18x35.5	1790	0.08			
820	16x25	2150	0.038	18x35.5	1840	0.071			
1000	16x31.5	2350	0.034	18x41	1930	0.066			
1200	16x35.5	2550	0.032						
1500	18x35.5	2710	0.031						
1800	18x41	3000	0.027						

Ripple Current (mA, rms) at 105°C 100KHz

Max Impedance (Ω) at 20°C 100KHz

φ DxL(mm)

WV Cap(μF)	200			250			350		
	Size	Ripple	Impedance	Size	Ripple	Impedance	Size	Ripple	Impedance
0.47	5x11	36	16.50	5x11	40	8.85	6.3x11	40	8.82
	6.3x11	41	16.50						
1	6.3x11	45	7.76	6.3x11	50	6.54	6.3x11	50	7.90
							8x11.5	58	6.35
2.2	6.3x11	55	5.18	8x11.5	72	4.12	8x11.5	75	5.30
							10x12.5	86	4.02
3.3	8x11.5	71	4.25	8x11.5	75	3.85	10x12.5	90	3.80
							10x16	100	3.52
4.7	8x11.5	78	5.00	8x11.5	85	3.50	10x16	118	3.13
	10x12.5	85	4.12	10x12.5	100	2.95	10x20	130	2.77
5.6	8x11.5	90	4.50	8x11.5	95	2.93	10x16	120	2.76
	10x12.5	95	3.55	10x12.5	105	2.9	10x20	132	2.58
6.8	8x16	115	3.25	8x16	124	2.8	10x16	148	2.43
	10x16	140	2.71	10x12.5	126	2.8	10x25	180	1.65
10				10x16	140	1.86			
	8x11.5	115	3.75	8x16	141	1.80	10x16	165	1.64
22	10x16	186	1.80	10x16	190	1.60	13x20	220	1.22
	10x20	205	1.40	10x20	210	1.30			
33	10x20	280	1.00	10x20	224	1.40	13x20	263	1.02
	13x20	330	0.80	10x25	248	1.25	13x25	290	0.86
47				13x20	310	0.90			
	10x20	311	0.72	13x20	375	0.60	16x25	389	0.76
56	13x20	360	0.65	13x25	405	0.45	16x31.5	430	0.62
	13x25	400	0.62						
68	13x20	430	0.45	13x25	420	0.42	16x35.5	460	0.60
	13x25	480	0.42	16x25	490	0.38	16x31.5	475	0.57
100	16x25	540	0.35						
	16x25	780	0.30	16x31.5	675	0.27	16x35.5	481	0.56
120	16x31.5	820	0.28				18x31.5	487	0.56
							18x35.5	513	0.55
150	16x25	740	0.28	16x31.5	692	0.26	18x35.5	525	0.54
	16x31.5	830	0.26	16x35.5	730	0.25	18x41	560	0.52
180	16x31.5	840	0.25	16x35.5	750	0.24	18x41	590	0.50
	16x35.5	860	0.23	18x31.5	750	0.23			
220	18x31.5	920	0.20	18x35.5	830	0.21			
	18x35.5	1050	0.19	18x31.5	850	0.20			
	18x41	1090	0.16	18x41	910	0.19			

WV Cap(μF)	400			420			450		
	Size	Ripple	Impedance	Size	Ripple	Impedance	Size	Ripple	Impedance
0.47	6.3x11	26	33	6.3x11	28	34	8x11.5	30	34
1	8x11.5	36	16.5	8x11.5	38	17	8x11.5	45	17.35
	10x12.5	76	13	10x12.5	58	12.1	10x16	65	10.25
2.2	8x11.5	65	13						
	8x9	78	14						
3.3	8x11.5	86	12	10x12.5	87	11	10x16	89	10
	8x11.5	89	11						
4.7	10x12.5	105	10	10x16	102	8.5	10x20	105	5
	8x16	105	8	10x16	109	6.8	10x20	110	4.75
5.6	10x12.5	120	9						
	10x12.5	144	7.7						
6.8	10x16	160	7.5	10x16	160	6	10x20	135	4.05
	10x14	201	5				10x20	163	7
10	10x16	213	3.8				10x25	180	3.75
	10x20	235	3.6	10x20	180	3.7	13x20	189	6.8
15	10x20	240	3						
	13x16	268	2.8						
22	13x20	295	2.65	13x25	330	2.7	13x25	320	2.8
	13x20	399	1.8						
33	13x25	440	1.6	16x25	480	1.8	16x25	460	2.2
	16x21	459	1.9				18x21	458	2.7
47	16x21	539	1.6				16x35.5	650	1.05
	16x25	580	1.4	16x31.5	620	1.1	18x25	596	1.65
56	16x25	587	1.03						
	16x31.5	650	0.85	16x35.5	670	0.9	18x31.5	730	0.95
68	16x31.5	800	0.8	18x31.5	750	0.8	18x31.5	721	0.8
	18x25	774	0.76				18x35.5	760	0.75
100	18x31.5	854	0.7				18x35.5	825	1.1
	18x35.5	900	1.3	18x35.5	820	0.7	18x41	880	0.74
120	18x35.5	930	1.3				18x41	980	1

Ripple Current (mA, rms) at 105°C 100KHz

Max Impedance (Ω) at 20°C 100KHz

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Aluminium Electrolytic Capacitors - Radial Leaded](#) category:

Click to view products by [Capxon](#) manufacturer:

Other Similar products are found below :

[LXY50VB4.7M-5X11](#) [RFO-100V471MJ7P#](#) [ECE-A1EGE220](#) [B41041A2687M8](#) [B41041A7226M8](#) [B41044A7157M6](#)
[EKXG201EC3101ML20S](#) [EKZM160ETD471MHB5D](#) [NCD681K10KVY5PF](#) [NEV1000M25EF-BULK](#) [NEV100M35DC](#) [NEV100M63DE](#)
[NEV220M25DD-BULK](#) [NEV.33M100AA](#) [NEV4700M50HB](#) [NEV.47M100AA](#) [NEVH1.0M250AB](#) [NEVH3.3M250BB](#) [NEVH3.3M450CC](#)
[KM4700/16](#) [KME50VB100M-8X11.5](#) [SG220M1CSA-0407](#) [ES5107M016AE1DA](#) [ESMG160ETD102MJ16S](#) [ESX472M16B](#)
[SZ010M1500A5S-1015](#) [227RZS050M](#) [476CKH100MSA](#) [477RZS050M](#) [UVX1V101KPA1FA](#) [UVX1V222MHA1CA](#) [KME25VB100M-](#)
[6.3X11](#) [VTL100S10](#) [VTL470S10](#) [VTL470S16A](#) [511D336M250EK5D](#) [052687X](#) [ECE-A1CF471](#) [EKMA500ELL4R7ME07D](#) [NRE-](#)
[S560M16V6.3X7TBSTF](#) [RGA221M1CTA-0611G](#) [ERZA630VHN182UP54N](#) [UPL1A331MPH](#) [SK035M0100AZS-0611](#) [MAL214658821E3](#)
[NEV1000M6.3DE](#) [NEV100M16CB](#) [NEV100M50DD-BULK](#) [NEV2200M16FF](#) [NEV220M50EE](#)