



110/216-Series

Heavy Action Toggle Switches

PRODUCT WEBPAGE

request sample, configure part



The 110/216-Series is a compactly designed, versatile metal construction toggle switch which is appropriate for a variety of uses. Features include single or double pole options, maintained or momentary construction with termination choices including solder lug end or bottom, wire leads and .250 tab terminals. The quick make/quick break contact mechanism makes the switch suitable for high voltage (125-250 volt) applications.

El 34 277VI



125, 250 VAC



Typical Applications

Small Appliances

Floor Maintenance

• Lighting

Q.

Tech Specs

Dielectric Strength

UL/CSA: 1000V - live to dead metal parts & opposite polarity

1

Electrical Life

25,000 cycles

Operating Temperature

0°F to 150°F (-17.8°C to +65.6°C)

Ordering Scheme

2

Sample Part Number 110-S 73

Selection

1. SERIES

I. OEINEO					
3A 250V, 6A 125V,	Şolder Lug	Solder Lug bottom)	Screw Terminals	Wire Leads	
Single Pole On-None-Off Off-None-(On) On-None-(Off)	110 110-M-NO 110-M-NC		110-S 110-SM-NO 110-SM-NC		
Double Pole On-None-Off On-None-On	2BK62 2BL62	:	2	2BK65 2BL65	
1A 250V, 3A 125V,	AC/DC				
Single Pole					
On-None-On On-None-(On)	112 112-м	-	-	112-A 112-M-A	
Double Pole	112-11			IIZ-IVI-A	
On-None-Off	216	-	-	216A	
Off-None-(On)	216-M-NO	-	-	216A-M-ANO	
On-None-(Off) On-None-On	216-M-NC 316	- 316-в	-	216A-M-ANC	
On-None-(On)	316-м	316-BM	-	-	
2 circuit					
1 On - 1 Off 1 (On) - 1 (Off)	516 516-M	516-B 516-BM	-	516-A 516-AM	
	510-14	510-BM	-	510-AM	
6A 120VAC					
Single Pole	00000			00005	
On-None-On	2BB62 -		-	2BB65	
5A 250V, 10A 125V, 1/4HP, 125V Single Pole					
On-None-Off	160H 10	60H-B	160H-S	160H-A	

2.	KI	NO	В	C	OL	0	R	

BAT STYLE unsealed 52 63 73	TOGGLE sealed 57 68 78	toggle length 0.375 0.500 0.687	bushing length 0.343 0.465 0.46555	
BALL STYLE unsealed 21 22 25	TOGGLE sealed - - -	toggle length 0.375 0.375 0.375 0.375	bushing length 0.250 0.343 0.875	

Notes

es: Momentary function only available with 73 toggles. 160H and 110-Series are available with .250 tab terminals. Add suffix /TABS to end of part number. ex. 110-73/TABS Indicates momentary function. 2


()

🕅 Configure Complete Part Number >

Browse Standard Parts >

Dimensional Specs

inches [millimeters]

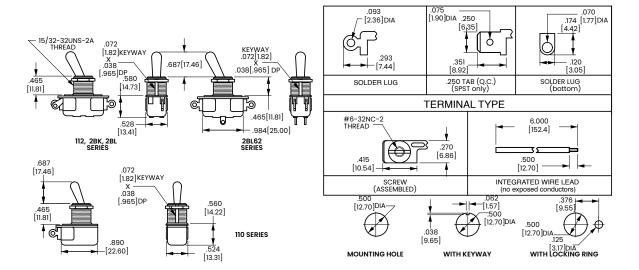

Authorized Sales Representatives and Distributors

Click on a region of the map below to find your local representatives and distributors or visit **www.carlingtech.com/findarep**.



About Carling

Founded in 1920, Carling Technologies is a leading manufacturer of electrical and electronic switches and assemblies, circuit breakers, electronic controls, power distribution units, and multiplexed power distribution systems. With six ISO9001 and IATF16949 registered manufacturing facilities and technical sales offices worldwide, Carling Technologies Sales, Service and Engineering teams do much more than manufacture electrical components, they engineer powerful solutions! To learn more about Carling please visit www.carlingtech.com/company-profile.

To view all of Carling's environmental, quality, health & safety certifications please visit **www.carlingtech.com/environmental-certifications**.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Pushbutton Switches category:

Click to view products by Carling manufacturer:

Other Similar products are found below :

 8940K2012
 LW1L-M1C10V-A
 LW1L-M1C70-A
 LW2L-A1C20M-GD
 LW2L-M1C20M-A
 60324L
 M22-D-R-GB0/K11
 M7E-HRN2

 67021K512
 67081K512X
 701PB580
 7199K101
 810K12910
 810KSV30B
 MML21EA2ADK
 MML21KA3ABK
 MML23KA3AC05K-001

 MML23KW3AA01W
 8418K2
 8442K3
 8450K1
 860K11911T01A
 861901
 861K11911T01A07
 861K13810T00A14
 861K13911

 8646AB6X718UL
 8646ABUL
 9001KXRK
 907AYY100
 PMHD155A1
 9533CD4+U574+U4922
 95-414.000
 99-450.837
 99-453.837

 PV3H2B0NN-341
 1203MRA
 A22NZBGANGA
 A22NZBNANGA
 A22NZMPATRA
 A2PMA1X03EC56
 A3A-5123-02
 A3A-7140
 A3A-7340

 7310
 A3A-7340
 A3U-TMW-A2C-5M
 A595
 12037A2ULCSA
 ABD122N-B
 1211390004