
# Level Tip Optical Type Fiber Teflon Tip





- Liquid level detection
- Recommended light source red 660 nm ±50
- · High chemical resistance to most acids and bases
- Housing Teflon "PFA" 1/4" NPT external threads on tip
- Fiber 2 x 2,2 mm with 2 x 1 mm core, fiber length max. 5 m
- Fiber: Bending radius max. 50 mm
  Plastic fiber with polyethylene-sheath
  Temperature range -20° +60° C

### **Product Description**

Optical level tip for red light to detect liquids. The teflon tip is designed so additional protection of the fibers is possible.

## **Ordering Key**

1049-X

Type ————
Fiber length

## **Type Selection**

**Housing material** 

Teflon "PFA"


#### Ordering no.

1049-X

## **Specifications**

Sensing accuracy Liquid level difference	Horizontal mounting: ± 5 mm Vertical mounting: ± 2.5 mm
<b>Material</b> Housing	Teflon PFA
Pipe thread	1/4" NPT 3/8" NPT available


## **Dimensions**



## **Mode of Operation**

The conical tip of the sensor forms an angle of 90°. This angle acts as a prism, i.e. the beam, emitted from a external amplifier (has to be red light emitter diode placed in one side of the sensor head, is reflected internally to the phototransistor placed in the other side of the sensor head, provided that the tip of the sensor is situated in free air. If the sensor tip is immersed in a liquid, always having a

refractive index different from air, the beam will not be refracted by the prism and the photo transistor will not receive any signal.

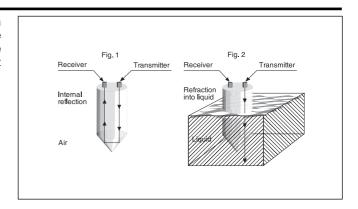

# **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Mounting Fixings category:

Click to view products by Carlo Gavazzi manufacturer:

Other Similar products are found below:

5912235-1 REV - 5912235-2 007541 627 M3783-7001 71-074914-006 71-441549-19S 75-69211-3P 75-69214-6P 75-69224-28P 75-69232-17S 7717-8DAP 85043GULPR 85047GULPT 85054GBEPR FPK-02-R10 PMS27488-001-01 1-18023-0 H-118-2 D83999/20WC8SN DB1 1302030464 DC31-14W19PN DC31-14W19PW DC31E14-19PX DC31E14-19PY DC32-18W32SN DC36-18-32SW DC36-18-32SX DC37-14-19PW DC37-22-21PX DC37E14-19PN DC37E14-19PX DC37E14-19PY 1302010957 1302263564 1302340393 1404-0016-78 14540 149331-9811 1561-60 1566 1566 17542 HS5659MB98PN NT20SATT01 201C5058-01-201 REV E 22594-8 KBB-141 89078GBEPR