


General Accessories

M8 IP69K Connector Cables

Type CONB54-..W

CARLO GAVAZZI

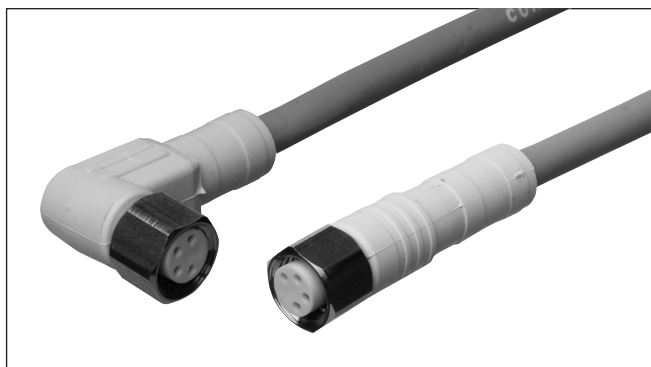

- IP69K version
- Straight or 90° connector
- M8 version
- 4-wire
- Good resistance against chemicals
- High temperature - up to 105°C (UL 90°C)
- UL and ECOLAB approved

Product Description

Highly robust IP69K connection cables for harsh environments. Especially suitable for use in washdown industries such as food & beverage, chemical and pharmaceutical industries thanks to the high standards of UL and ECOLAB. Featuring UL certified temperatures of up to 90°C, ECOLAB certification and IP69K protection class, the CONB IP69K connectors offer a guaranteed

long term reliability even in the harshest environments. Moreover, the connectors are resistant to aggressive chemicals and cleaning agents adhering to high Ecolab standards which make them very suitable to be used in Food & Beverage industry. For maximum flexibility, the connectors are available in straight or angled versions in M8 connector, 4 wires.

Ordering Key

CONB54NF-A2W

CONB _____
 5 = M8 DC _____
 4 = 4 wire (BN, BU, BK, WH) _____
 N= Not shielded _____
 F= Female _____
 A = Angled _____
 S = Straight _____
 2 = 2 metres _____
 5 = 5 metres _____
 W = Washdown _____

Type Selection


| Plug type | Cable length | Ordering number TPE |
|-----------------|--------------|---------------------|
| 4-Wire Angled | 2 m | CONB54NF-A2W |
| | 5 m | CONB54NF-A5W |
| 4-Wire Straight | 2 m | CONB54NF-S2W |
| | 5 m | CONB54NF-S5W |

Specifications


| | | | |
|---|---|----------------------|---|
| Rated operating voltage (U _B) | 30V AC/DC | Tightening torque | 0.5 Nm |
| Output current | ≤ 4 A | Connection cable | TPE orange |
| Contact resistance | ≤ 5 mΩ | Wire cross section | 4 x 0.25 mm ² (jacket Ø 4.7 mm) |
| Contact material | Cu/Sn | Weight | approx 54g approx 130g |
| Coating | Cu/Au | 2 m version | |
| Contact bearer material | PP white | 5 m version | |
| Temperature | -40° to +105°C (90°C UL) -40° to +221°F (194°F UL) | Pollution degree | 3 |
| Degree of protection | IP69K | Overvoltage category | III |
| O-ring sealing | EPDM | | |
| Rated Impulse Voltage | 0.8 kV | | |
| Insulation resistance | > 10 ⁹ Ω | | |
| Moulded body material | PP white | | |
| Union Locking nut | V4A | | |

Dimensions


Straight Version

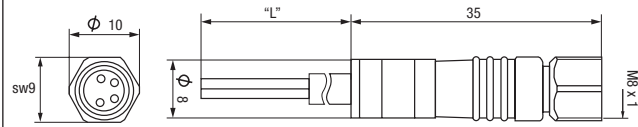

Angled Version

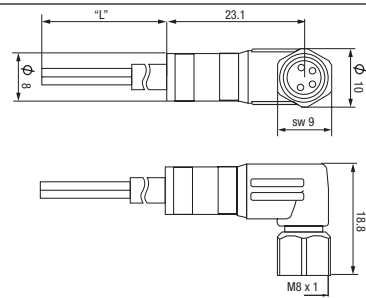


Contact layout



Colour Code

- 1 Brown
- 2 White
- 3 Blue
- 4 Black

Derating Curve (DIN EN 60512-5-2)

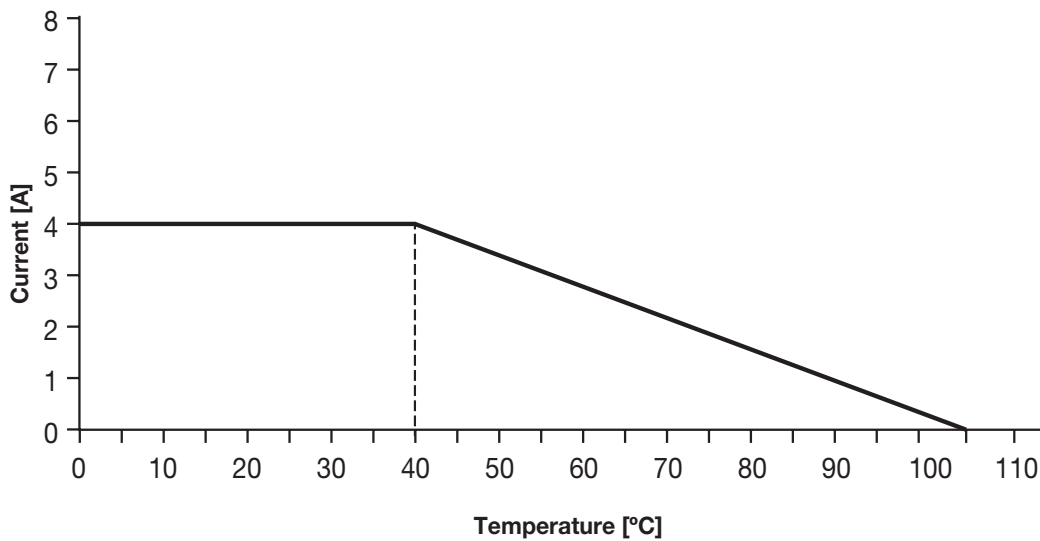

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Sensor Cables / Actuator Cables](#) category:

Click to view products by [Carlo Gavazzi](#) manufacturer:

Other Similar products are found below :

[1300070444](#) [43-10984](#) [M83513/19-F01CP](#) [704000D02F120](#) [MDM15SH001K](#) [MDM25PH003BF222](#) [802027107404-1](#) [885030A09M010](#)
[885030A09M020](#) [1200650174](#) [1200651332](#) [1200651713](#) [1200660171](#) [1200660208](#) [1200660343](#) [1200660804](#) [1200660845](#) [1200660926](#)
[1200660977](#) [1200661173](#) [1200661354](#) [120066-1712](#) [1200720053](#) [1200720099](#) [1200720153](#) [1200720172](#) [1200720217](#) [1200720226](#)
[1200720251](#) [1200720285](#) [1200720296](#) [1200720404](#) [1200730148](#) [1200730378](#) [1200800231](#) [1200860112](#) [1200860121](#) [1200860125](#)
[1200860337](#) [1200860365](#) [1200860420](#) [1200870046](#) [1200870123](#) [1200870248](#) [1200980102](#) [1200660181](#) [1200660183](#) [1200660827](#)
[1200660849](#) [1200661170](#)