

Proximity Inductive Sensors Extended Range, Nickel-Plated Brass Housing Types ICB, M12

CARLO GAVAZZI



- Sensing distance: 4 to 8 mm
- Flush or non-flush types
- Short or long body versions
- Rated operational voltage (U_b): 10 - 36 VDC
- Output: DC 200 mA, NPN or PNP
- Normally open or Normally closed
- LED indication for output ON
- Protection: reverse polarity, short circuit, transients
- Cable or M12 plug versions
- According to IEC 60947-5-2
- Laser engraved on front cap, permanently legible
- CSA certified for Hazardous Locations




Product Description

A family of inductive proximity switches in industrial standard nickel-plated brass housings. They are able to handle applications where high sensing range is requested.

Output is open collector NPN or PNP transistors.

Ordering Key **ICB12S30F04NOM1**

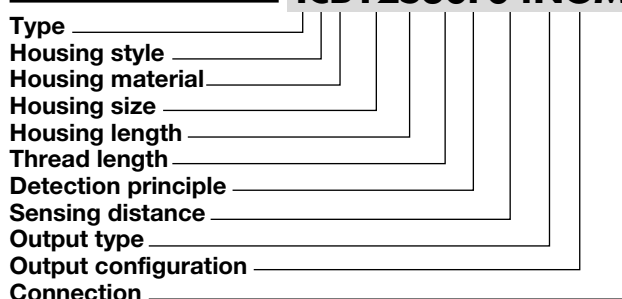

Type Selection

| Conne- ction | Body style | Rated operating distance S_n | Ordering no. NPN, Normally open | Ordering no. PNP, Normally open | Ordering no. NPN, Normally closed | Ordering no. PNP, Normally closed |
|-----------------|---------------|--------------------------------------|---------------------------------------|---------------------------------------|---|---|
| Cable | Short | 4 mm ¹⁾ | ICB12S30F04NO | ICB12S30F04PO | ICB12S30F04NC | ICB12S30F04PC |
| Cable | Short | 8 mm ²⁾ | ICB12S30N08NO | ICB12S30N08PO | ICB12S30N08NC | ICB12S30N08PC |
| Plug | Short | 4 mm ¹⁾ | ICB12S30F04NOM1 | ICB12S30F04POM1 | ICB12S30F04NCM1 | ICB12S30F04PCM1 |
| Plug | Short | 8 mm ²⁾ | ICB12S30N08NOM1 | ICB12S30N08POM1 | ICB12S30N08NCM1 | ICB12S30N08PCM1 |
| Cable | Long | 4 mm ¹⁾ | ICB12L50F04NO | ICB12L50F04PO | ICB12L50F04NC | ICB12L50F04PC |
| Cable | Long | 8 mm ²⁾ | ICB12L50N08NO | ICB12L50N08PO | ICB12L50N08NC | ICB12L50N08PC |
| Plug | Long | 4 mm ¹⁾ | ICB12L50F04NOM1 | ICB12L50F04POM1 | ICB12L50F04NCM1 | ICB12L50F04PCM1 |
| Plug | Long | 8 mm ²⁾ | ICB12L50N08NOM1 | ICB12L50N08POM1 | ICB12L50N08NCM1 | ICB12L50N08PCM1 |

¹⁾ For flush mounting in metal

²⁾ For non-flush mounting in metal

Specifications

| | | | |
|---|--|--|--|
| Rated operational voltage (U_b) | 10 to 36 VDC (ripple incl.) | Indication for short circuit/ overload | LED blinking (f = 2 Hz) |
| Ripple | ≤ 10% | Assured operating sensing distance (S_a) | $0 \leq S_a \leq 0.81 \times S_n$ |
| Output current (I_o) | ≤ 200 mA @ 50°C (≤ 150 mA @ 50-70°C) | Effective operating distance (S_e) | $0.9 \times S_n \leq S_e \leq 1.1 \times S_n$ |
| OFF-state current (I_i) | ≤ 50 μA | Usable operating distance (S_u) | $0.9 \times S_r \leq S_u \leq 1.1 \times S_r$ |
| No load supply current (I_o) | ≤ 15 mA | Repeat accuracy (R) | ≤ 10% |
| Voltage drop (U_d) | Max. 2.5 VDC @ 200 mA | Differential travel (H) (Hysteresis) | 1 to 20% of sensing dist. |
| Protection | Reverse polarity, short-circuit, transients | Ambient temperature | Operating: -25° to +70°C (-13° to +158°F) Storage: -30° to +80°C (-22° to +176°F) |
| Voltage transient | 1 kV/0.5 J | Shock and vibration | IEC 60947-5-2/7.4 |
| Power ON delay (t_o) | ≤ 20 ms | | |
| Operating frequency (f) | ≤ 2000 Hz | | |
| Indication for output ON | Activated LED, yellow | | |
| NO version | Target present | | |
| NC version | Target not present | | |









Specifications (cont.)

| | |
|-------------------------------------|---|
| Housing material | |
| Body | Nickel-plated brass |
| Front | Grey thermoplastic polyester |
| Connection | |
| Cable | Ø4.1 x 2 m, 3 x 0.25 mm ² , grey PVC, oil proof |
| Plug | M12 x 1 |
| Degree of protection | IP 67 |
| Weight (cable/nuts included) | |
| Cable | Max. 120 g |
| Plug | Max. 30 g |
| Dimensions | See diagrams below |
| Tightening torque | 10 Nm |
| Approvals | <p>cULus (UL508)</p> <p>cCSAus As Process Control Equipment for Hazardous Locations.</p> <ul style="list-style-type: none"> - Class I, Division 2, Groups A, B, C and D. - T5, Enclosure Type 4. <p>Ambient temperature Ta: -25° to +60°C</p> |



Note: The terminal connector (version ...M1) was not evaluated. The suitability of the terminal connector should be determined in the end-use application.

| | |
|--------------------------|---|
| Approvals (cont.) | CCC is not required for products with a maximum operating voltage of ≤ 36 V |
| EMC protection | According to IEC 60947-5-2 |
| IEC 61000-4-2 (ESD) | 8 KV air discharge, 4 KV contact discharge |
| IEC 61000-4-3 | 3 V/m |
| IEC 61000-4-4 | 2 kV |
| IEC 61000-4-6 | 3 V |
| IEC 61000-4-8 | 30 A/m |
| MTTF_d | 750 years @ 50°C (122°F) |

Dimensions (mm)

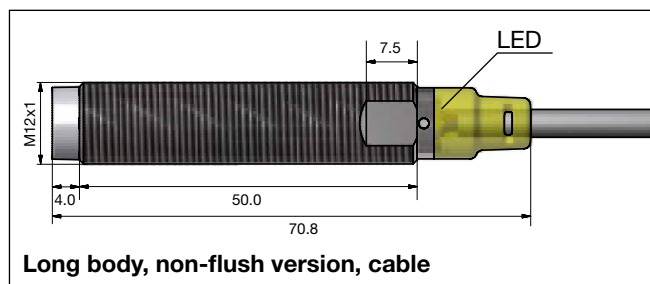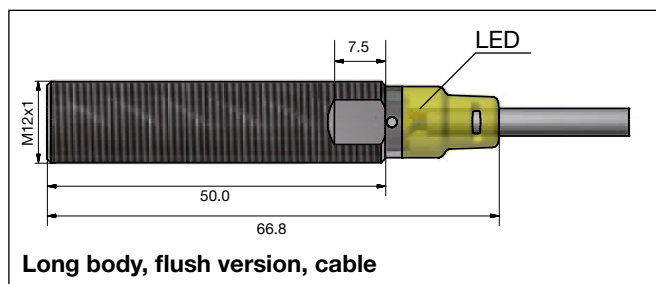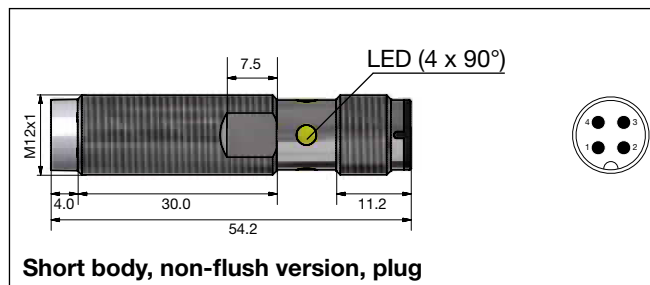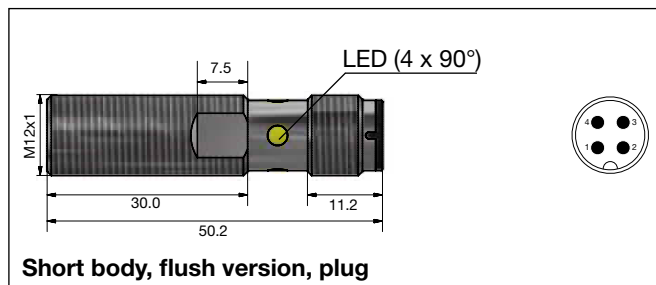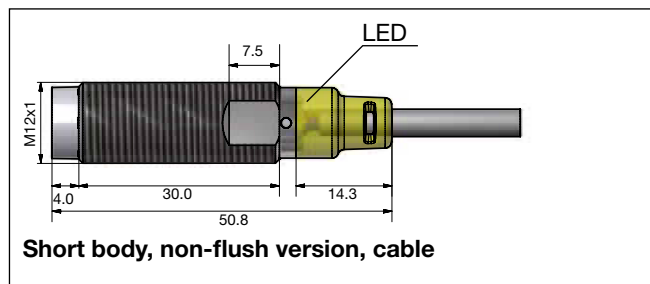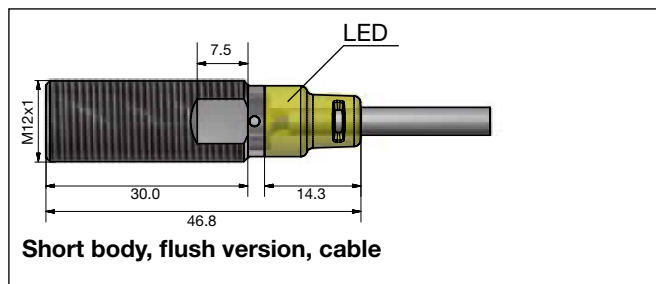


Dimensions (mm) (cont.)

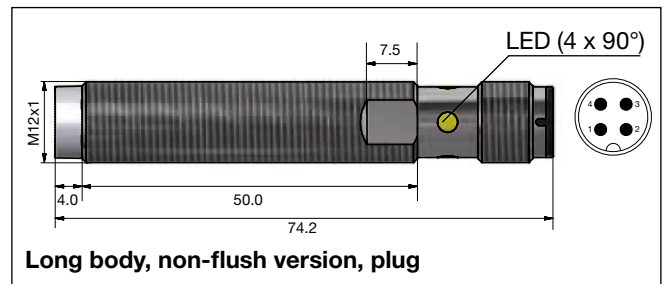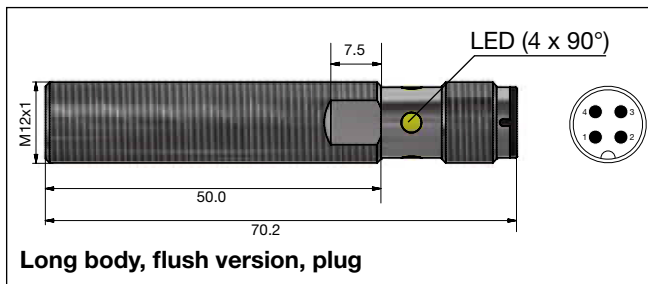


Installation


Flush sensor, when installed in damping material, must be according to Picture 1A.

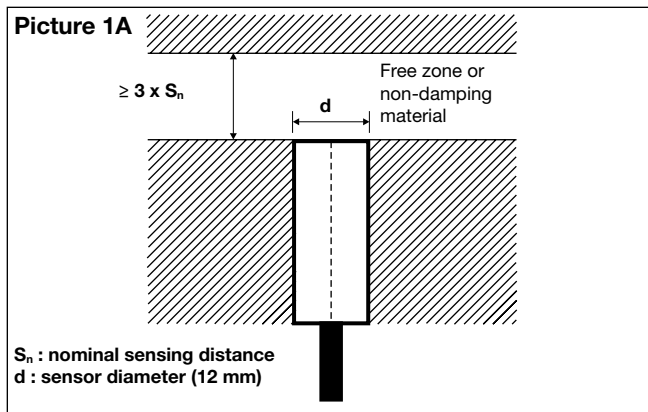


Non-flush sensor, when installed in damping material, must be according to Picture 1B.

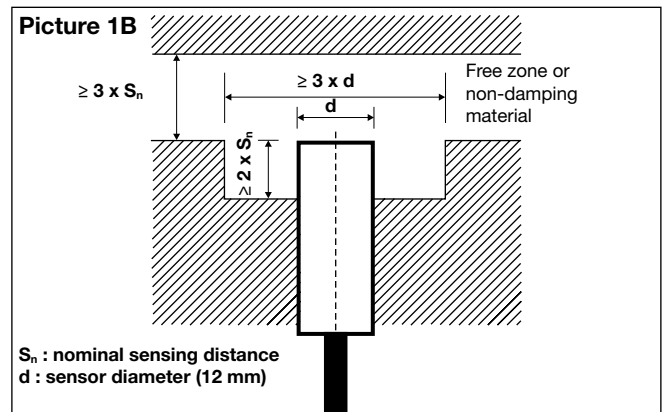


Flush sensors, when installed together in damping material, must be according to Picture 2A.

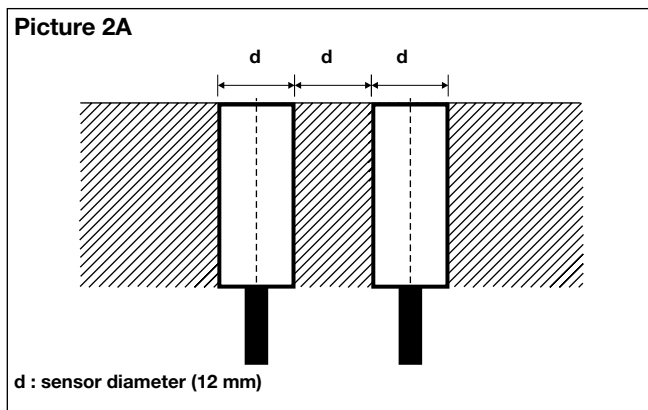

Non-flush sensors, when installed together in damping material, must be according to Picture 2B.

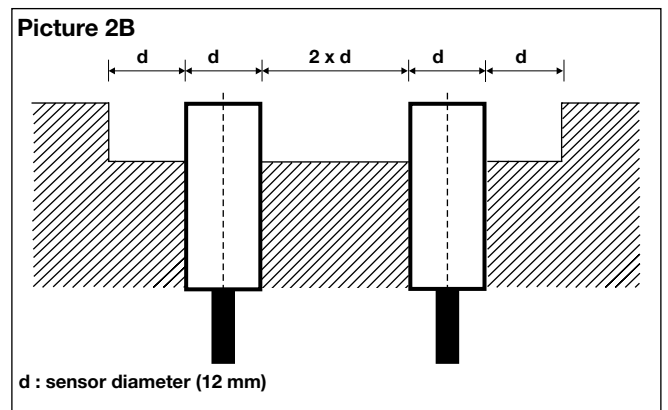


For sensors installed opposite each other, a minimum space of $6 \times S_n$ (the nominal sensing distance) must be observed (See Picture 3).

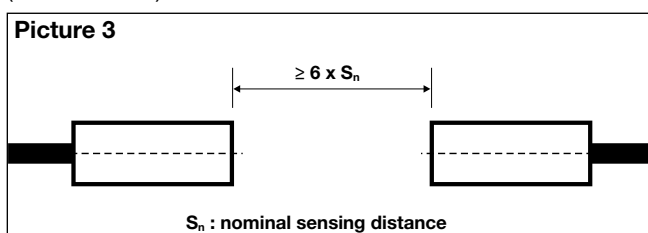




Wiring Diagram

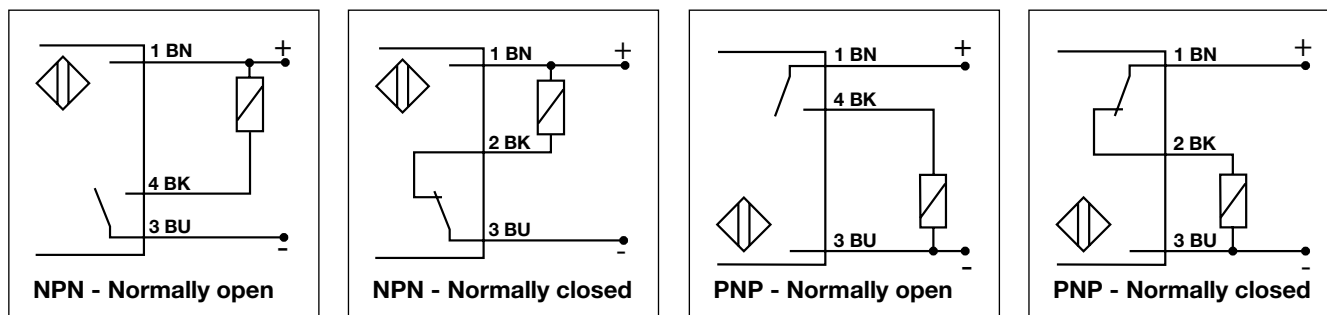

Reduction Factors

The rated operating distance is reduced by the use of metals and alloys other than Fe360.

The most important reduction factors for inductive proximity sensors are shown in Picture 4.

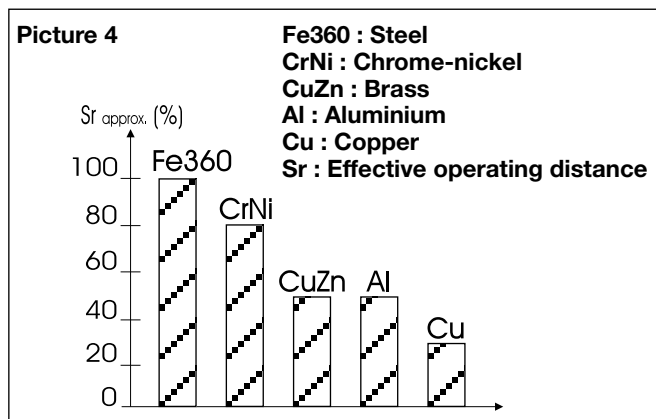

Delivery Contents

- Inductive proximity switch ICB.
- 2 nuts NPB
- Packaging: plastic bag

Accessories for Plug Versions

| | PVC | PUR |
|---------------------------------------|--------------|---------------|
| 3-wire angled connector, 2 m cable | CONB13NF-A2 | CONB13NF-A2P |
| 3-wire angled connector, 5 m cable | CONB13NF-A5 | CONB13NF-A5P |
| 3-wire angled connector, 10 m cable | CONB13NF-A10 | CONB13NF-A10P |
| 3-wire angled connector, 15 m cable | CONB13NF-A15 | CONB13NF-A15P |
| 3-wire straight connector, 2 m cable | CONB13NF-S2 | CONB13NF-S2P |
| 3-wire straight connector, 5 m cable | CONB13NF-S5 | CONB13NF-S5P |
| 3-wire straight connector, 10 m cable | CONB13NF-S10 | CONB13NF-S10P |
| 3-wire straight connector, 15 m cable | CONB13NF-S15 | CONB13NF-S15P |

For any additional information or different options, please refer to the "General Accessories - Connector Cables -Type CONB1..." datasheets.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Proximity Sensors](#) category:

Click to view products by [Carlo Gavazzi](#) manufacturer:

Other Similar products are found below :

[01.001.5653.1](#) [70.340.1028.0](#) [70.360.2428.0](#) [70.364.4828.0](#) [70.810.1053.0](#) [72.360.1628.0](#) [73.363.6428.0](#) [8027AL20NL2CPXX](#) [FYCC8E1-2](#)
[9221350022](#) [922AA2W-A9P-L](#) [PLS2](#) [GL-12F-C2.5X10\(LOT3\)](#) [972AB2XM-A3N-L](#) [972AB3XM-A3P-L](#) [PS3251](#) [980659-1](#) [QT-12](#) [E2E2-](#)
[X5M41-M4](#) [E2E-X14MD1-G](#) [E2E-X2D1-G](#) [E2EX2ME2N](#) [E2EX3D1SM1N](#) [E2E-X4MD1-G](#) [E2E-X5E1-5M-N](#) [E2E-X5Y2-N](#) [E2E-X7D1-](#)
[M1J-T-0.3M-N](#) [E2FMX1R5D12M](#) [E2K-F10MC1](#) [5M](#) [EH-302](#) [EI3010TBOP](#) [EI5515NPAP](#) [MS605AU](#) [EP175-32000](#) [BSA-08-25-08](#)
[IFRM04N35B1/L](#) [IFRM04P1513/S35L](#) [IFRM06P1703/S35L](#) [IFRM08P1501/S35L](#) [IFRM12N17G3/L](#) [IFRM12P17G3/L](#) [IFRM12P3502/L](#)
[IFRM12P37G1/S14L](#) [ILFK12E9189/I02](#) [ILFK12E9193/I02](#) [IMM2582C](#) [OISN-013](#) [25.161.3253.0](#) [25.332.0653.1](#) [25.352.0653.0](#)