

# Photoelectrics Retro-reflective, Polarized Type PB3P



- Range: 3 m
- Polarized modulated, visible red light
- For transparent glass detection
- Adjustable sensitivity
- Rated operational voltage: 10 to 30 VDC
- Output: 200 mA, NPN or PNP
- Make and break switching funct., with LED indication
- Protection: Reverse polarity, short circuit, overload
- Operating frequency: 1 kHz
- High immunity to ambient light
- 18 x 75 x 36 mm ABS housing, IP 67
- Timer options



## Product Description

Polarized, retro-reflective photoelectric switch. Range 3 m. Reliable detection of shiny and transparent objects. Visible beam allows easy alignment. Precise detection through narrow beam. Rugged, glass-reinforced ABS housing, totally sealed. IP 67. 2 m PVC cable connection or standard M 12 plug.

## Ordering Key PB3P A NPA-1

Type \_\_\_\_\_  
 Option: timer function \_\_\_\_\_  
 Output type \_\_\_\_\_  
 Connection type \_\_\_\_\_

## Type Selection

Housing W x H x D Rated operating dist. (S <sub>n</sub> )	Timer function Option	Ordering no. NPN/cable Make & break swit.	Ordering no. NPN/plug Make & break swit.	Ordering no. PNP/cable Make & break swit.	Ordering no. PNP/plug Make & break swit.
18 x 75 x 36 3 m	Without timer	<b>PB 3P NPA</b>	<b>PB 3P NPA-1</b>	<b>PB 3P PPA</b>	<b>PB 3P PPA-1</b>
	Delay on operate	<b>PB 3PA NPA</b>	<b>PB 3PA NPA-1</b>	<b>PB 3PA PPA</b>	<b>PB 3PA PPA-1</b>
	Delay on release	<b>PB 3PB NPA</b>	<b>PB 3PB NPA-1</b>	<b>PB 3PB PPA</b>	<b>PB 3PB PPA-1</b>
	One shot	<b>PB 3PT NPA</b>	<b>PB 3PT NPA-1</b>	<b>PB 3PT PPA</b>	<b>PB 3PT PPA-1</b>

Note: Plugs and reflectors to be ordered separately.

## Specifications

<b>Rated operating dist. (S<sub>n</sub>)</b>	3 m, with reflector type ER 22, ref. target	<b>Light spot size Ambient light</b>	65 mm at 2 m Max. 10,000 lux
<b>Temperature drift</b>	0.4%/K	<b>Operating frequency (f)</b>	1000 Hz, light/dark ratio 1:2
<b>Rated operational volt. (U<sub>B</sub>)</b>	10 to 40 VDC (ripple incl.)	<b>Response time</b>	OFF-ON (t <sub>ON</sub> ) ≤ 660 μs ON-OFF (t <sub>OFF</sub> ) ≤ 330 μs
<b>Ripple (U<sub>ripple</sub>)</b>	10%	<b>Power ON delay (t<sub>v</sub>)</b>	Typ. 100 ms
<b>Output current</b>		<b>Indication</b>	Output ON LED, yellow
Continuous (I <sub>a</sub> )	≤ 200 mA	<b>Optional timer</b>	Delay on operate (function A) 0.1 to 14 s ±4 s Delay on release (function B) 0.1 to 14 s ±4 s One shot (function T) 0.1 to 14 s ±4 s
Short-time (I)	200 mA, Max. load capacity 100 nF	<b>Environment</b>	Overvoltage category III (IEC 60664/60664A; 60947-1) Pollution degree 3 (IEC 60664/60664A; 60947-1) Degree of protection IP 67 (IEC 60529; 60947-1)
<b>No load supply current (I<sub>o</sub>)</b>	≤ 40 mA	<b>Temperature</b>	Operating -20° to +60°C (-4° to 140°F) Storage -30° to +70°C (-22° to 158°F)
<b>OFF-state current (I<sub>i</sub>)</b>	Max. 100 μA		
<b>Voltage drop (U<sub>d</sub>)</b>	≤ 2.5 VDC		
<b>Protection</b>	Reverse polarity, overload short-circuit, transients		
<b>Transient voltage</b>	≤ 1 kV/0.5 J		
<b>Sensitivity</b>	Adjustable, 20 turn pot		
<b>Light source</b>	GaAlAs LED 660nm		
<b>Light type</b>	Visible red polarized, modulated		
<b>Optical angle</b>	±1°		




## Specifications (cont.)

<b>Vibration</b>	10 to 150 Hz, 0.5 mm/7.5 g (IEC 60068-2-6)
<b>Shock</b>	2 x 1 m & 100 x 0.5 m (IEC 60068-2-32)
<b>Dielectric voltage</b>	500 VAC (rms)
<b>Housing material</b>	
Body	ABS, glass-reinforced, grey
Front	ABS, glass-reinforced, black
Lenses	Acrylic
Mounting bracket ABP-1	Iron, black
<b>Connection</b>	
Cable	Black, 2 m, oilproof PVC, 4 x 0.35 mm <sup>2</sup> , <b>Note:</b> Other lengths on request CONH1A-..
Plug	
<b>Weight</b>	197 g cable version 105 g plug version


## Truth Table

	Make switching		Break switching	
	Yes	No	Yes	No
Object present	Yes	No	Yes	No
LED	OFF	ON	OFF	ON
Load	Non-active	Active	Active	Non-active
Output NPN	High	Low	Low	High
Output PNP	Low	High	High	Low


## Wiring Diagram

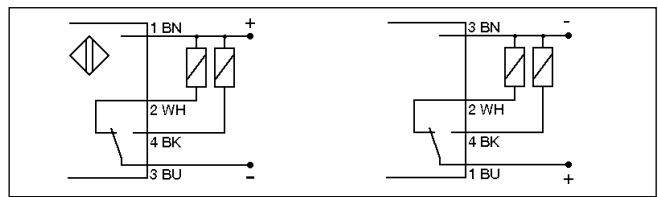

## Dimensions

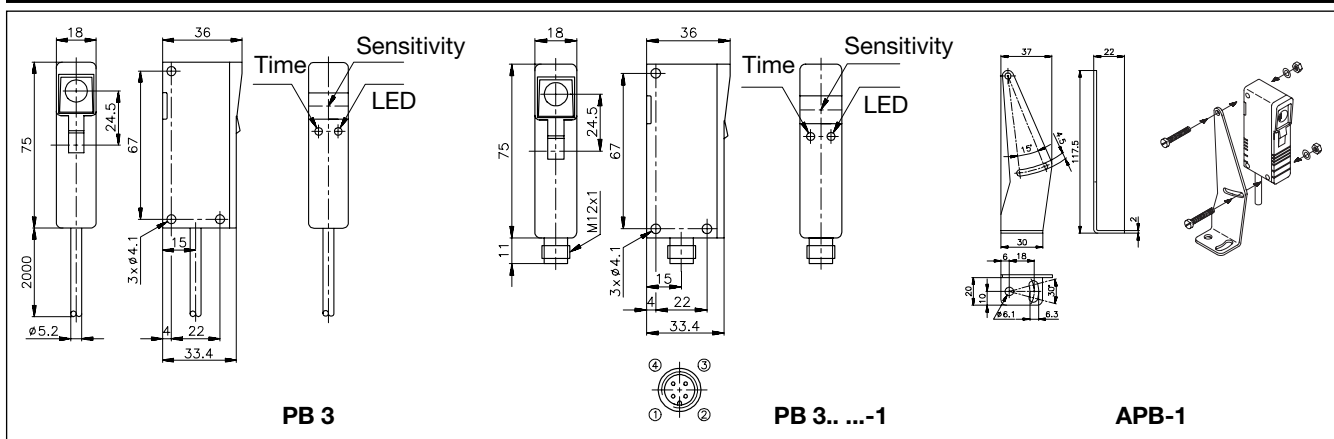

## Operation Diagram (Make switching (NO))

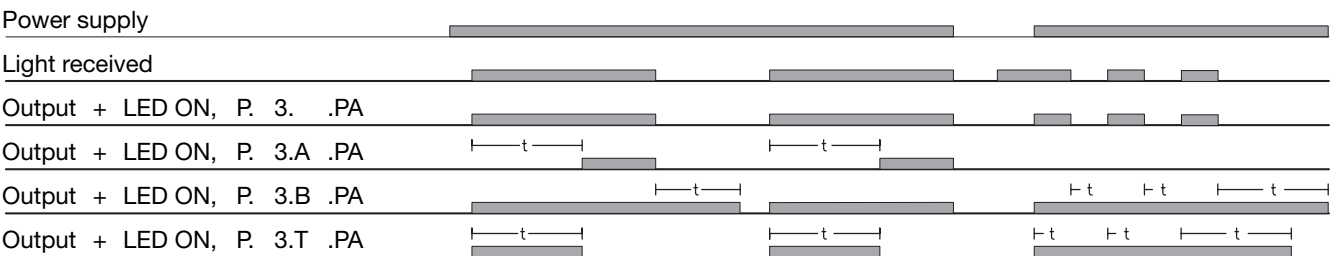

## Accessories

- Reflectors: ER series.
- Plugs: Standard M 12, CONH1A-.. serie.

## Delivery Contents

- Photoelectric switch: PB3P.
- Adjustable mounting bracket APB-1
- Screwdriver for adjustments, 77-000
- Installation instruction
- Two M 4 x 25 mm screws, washers and M 4 nuts
- **Packaging:** Carton box

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Photoelectric Sensors](#) category:*

*Click to view products by [Carlo Gavazzi](#) manufacturer:*

Other Similar products are found below :

[7442AD2X5FRX](#) [EX-19B-LP](#) [7443AR0X5FRX](#) [7452AD4D4NNX](#) [F3WD052C5M](#) [7655AR-04-F-1-2-RX](#) [7694ADE04DS2X](#) [FE7C-FRC6S-M](#) [PM-R24-R](#) [Q45VR2FPQ](#) [13104RQD07](#) [E3JUXM4MN](#) [E3L2DC4](#) [E3S3LE21](#) [E3SCT11M1J03M](#) [E3SDS20E21](#) [E3VDS70C43S](#)  
[E3XNM16](#) [BR23P](#) [HOA6563-001](#) [OJ-3307-30N8](#) [OS-311A-30](#) [P32013](#) [P34036](#) [P43004](#) [P56001](#) [P60001](#) [PB10CNT15PO](#) [S14132](#) [935286-000](#) [S52101](#) [S56258](#) [SH-21E](#) [FD-SN500](#) [FE7B-FDRB6-M](#) [SU-79](#) [T36342](#) [T40300](#) [T60001](#) [PD60CNX20BP](#) [FX2-A3R](#) [FX-302-HY](#) [FZS](#)  
[PM-T64W](#) [PX-22](#) [PZ2-51P](#) [CX-491-P-J](#) [CYNUTX10](#) [UZH802](#) [UZH803](#)