

Switching Power Supply Type SPD 5W DIN rail mounting



- Universal AC input full range
- Installation on DIN rail 7.5 or 15mm
- Short circuit protection
- Overload protection
- High efficiency
- LED indicator for DC power ON
- LED indication for DC low
- Internal input filter
- CE, TUV approved and cULus Listed

Product Description

The Switching power supplies SPD series are specially designed to be used in all automation application where the installation is on a DIN rail and compact dimensions and performance are a must.

Ordering Key

SP D 12 05 1 B

Model _____
 Mounting (D = Din rail) _____
 Output voltage _____
 Output power _____
 Input Type _____
 Optional features _____

Approvals



Output Performances

MODEL NO.	INPUT VOLTAGE	OUTPUT WATTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT	EFF. (min.)	EFF. (typ.)	EFF. (avg.)
Single Output Models							
SPD05	90~264 VAC	5 WATTS	+ 5 VDC	1000 mA	67%	83%	69%
SPD12	90~264 VAC	5 WATTS	+ 12 VDC	420 mA	70%	86%	72%
SPD24	90~264 VAC	5 WATTS	+ 15 VDC	340 mA	70%	87%	72%
SPD48	90~264 VAC	5 WATTS	+ 24 VDC	210 mA	70%	87%	72%

Output Data

Line regulation	± 1%
Load regulation	±2%
Minimum load	0A
Turn on time (full resistive load)	1000ms max
Transient recovery time	2ms
Ripple and noise	50mVpp
Output voltage accuracy	±1%
Temperature coefficient	±0.03%/°C
Hold up time	
Vi= 115VAC	30ms
Vi=230VAC	130ms
Voltage fall time (I _o nom Vi nom)	150ms max

Rated continuous loading	5V Model	1.0A @ 5VDC/0.85A @ 5.75VDC
	12V Model	0.42A @ 12VDC/0.36A @ 13.8VDC
	15V Model	0.34A @ 15VDC/0.28A @ 17.25VDC
	24V Model	0.21A @ 24VDC/0.17A @ 28.8VDC
Reverse voltage	5V Model	VDC 7.5
	12V Model	VDC 18
	15V Model	VDC 22
	24V Model	VDC 35
Capacitor load		7000µF
Voltage rise time at full resistive load		150ms max.

Input Data

Rated input voltage	100 - 240VAC		Power dissipation		
Voltage range			5V Model	2.2W	
AC	90 - 265VAC		12V Model	1.9W	
DC	120 - 370VDC		15V Model	2.1W	
Rated input current			24V Model	1.8W	
(Vi:115VAC, Io nom)	Typ.	115mA	Frequency range	47-63Hz	
	Max.	200mA	Leakage current		
Voltage range			Input-Output	0.25mA	
Vi=115VAC	10A		Input-FG	3.5mA	
Vi=230VAC	18A				

Controls and Protection

Overload	110%~135%	Over voltage protection	125 - 145%
Input fuse	T25A/250VAC internal ¹⁾	Internal surge voltage protection	Varistor
Output short circuit	Hiccup mode		

1) Fuse not replaceable by user


General Data (@ nominal line, full load, 25°C)

Ambient temperature	-20°C to +71°C	MTB		
Derating (>61°C to +71°C)	2.5%/C	5V Model	802000 Hours	
Ambient humidity	20 - 95% RH	12V Model	805000 Hours	
Storage	-25°C to +85°C	15V Model	808000 Hours	
Protection degree	IP20	24V Model	812000 Hours	
Cooling	Free air convection	Case material	Plastic: PC, UL94-V0	
Insulation voltage				
Input-Output	3.000VAC/4242VDC min		Pollution degree	2
Input-FG	1.500VAC/2121VDC min		Altitude	4850 m
Insulation resistance I/O	100MΩ min (@ 500VDC)		Dimensions LxWxD mm(inch)	90(3.60)x22.5(0.89)x114(4.49)
			Weight	120 g


Norms and Standard

Vibration resistance	meet IEC 60068-2-6 (Mounting by rail: 10-500Hz, 2G, along X, Y, Z each Axis, 60 min for each Axis)	CE	EN 61000-6-3, EN 55022 Class B, EN 61000-3-2, EN 61000-3-3, EN 61000-6-2, EN 55024, EN 61000-4-2 Level 4, EN 61000-4-3 Level 3, EN 61000-4-4 Level 4, EN 61000-4-5 L-Level 3, L/N-FG Level 4, EN 61000-4-6 Level 3, EN 61000-4-8 Level 4, EN 61000-4-11, ENV 50204 Level 2, EN 61204-3
Shock resistance	meet IEC 60068-2-27 (15G, 11ms, 3 Axis, 6 faces, 3 times for each face)		
UL/cUL	UL508 listed, UL60950-1, UL1310 Class 2 Power (only 5V, 12V w/o Class 2) Recognized, ISA 12.12.01 (Class 1, Division 2, Groups A, B, C and D)		
TUV	EN 60950-1, CB scheme		
CCC	Available upon request		


Block Diagram

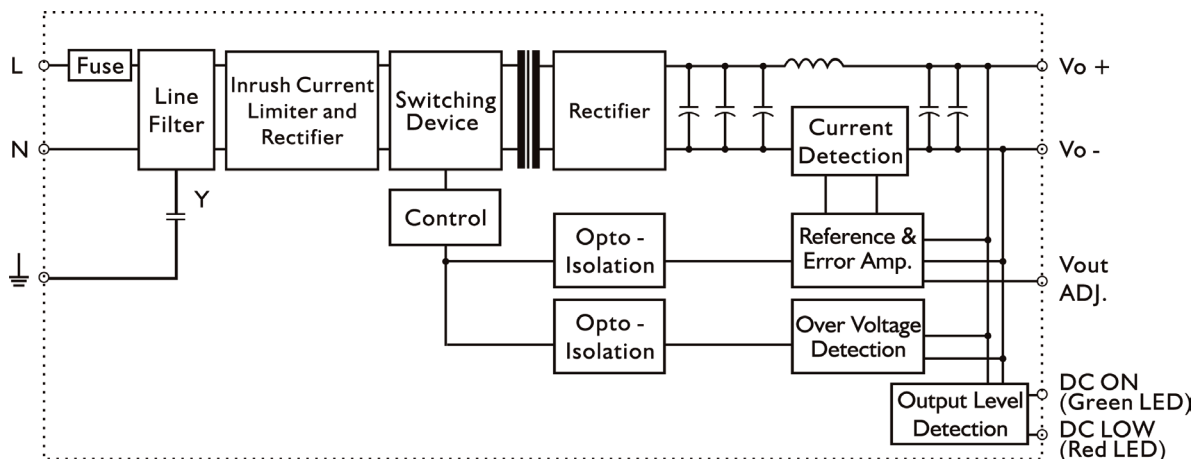


Pin Assignment and Front Controls

Pin No.	Designation	Description
1	V+	Positive output terminal
2	V-	Negative output terminal
3		Ground this terminal to minimize high-frequency emission
4	N	Input terminals (neutral conductor, no polarity at DC input)
5	L	Input terminals (phase conductor, no polarity at DC input)
	ON	Operation indicator LED
	LO	DC LOW indicator LED
	Vout ADJ.	Trimmer-potentiometer for Vout adjustment


Derating Diagram

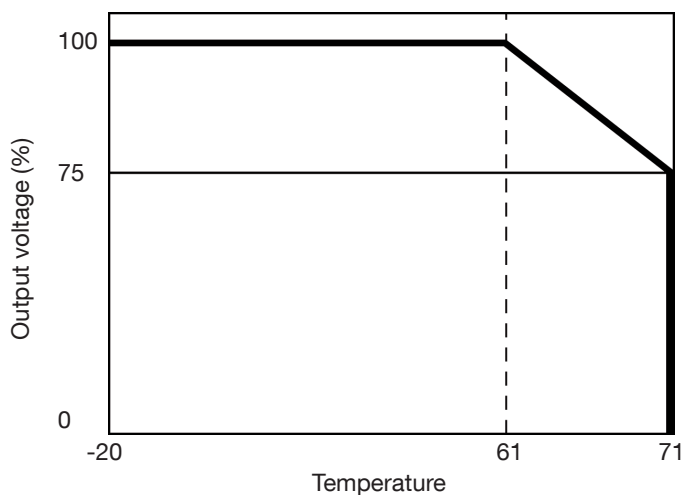


Typ. Current Limited Curve

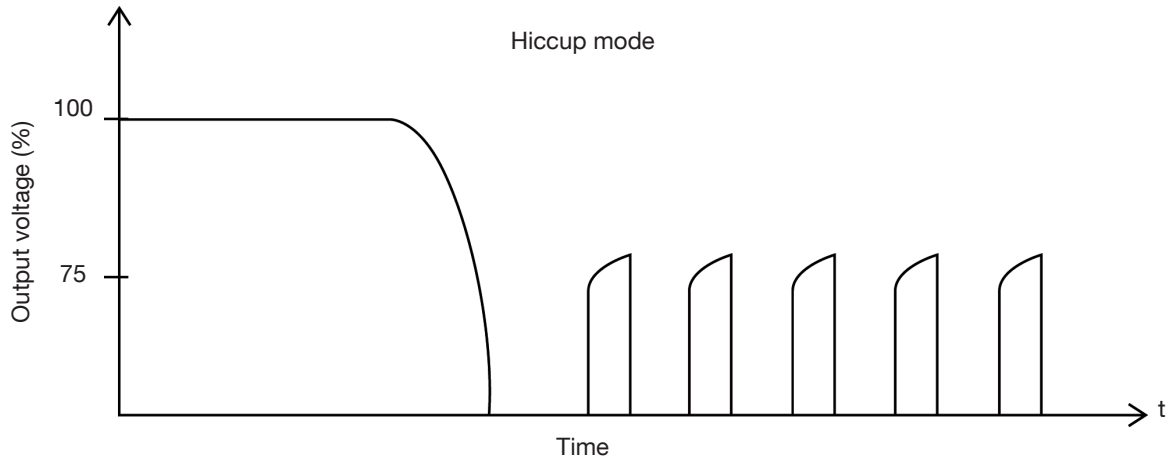

Mechanical Drawings mm (inches)

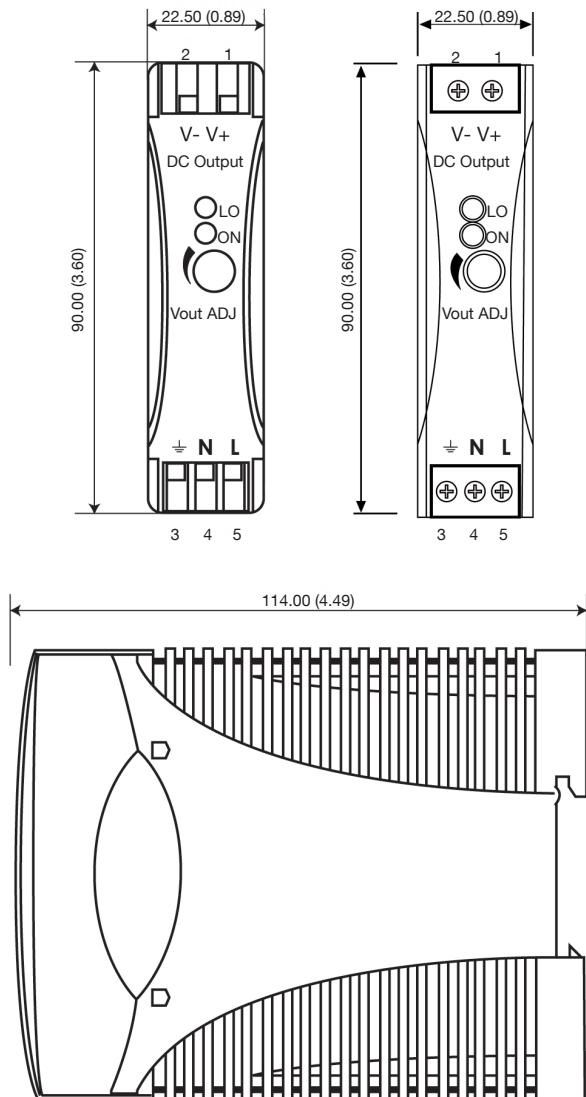

Typ. Efficiency Curve

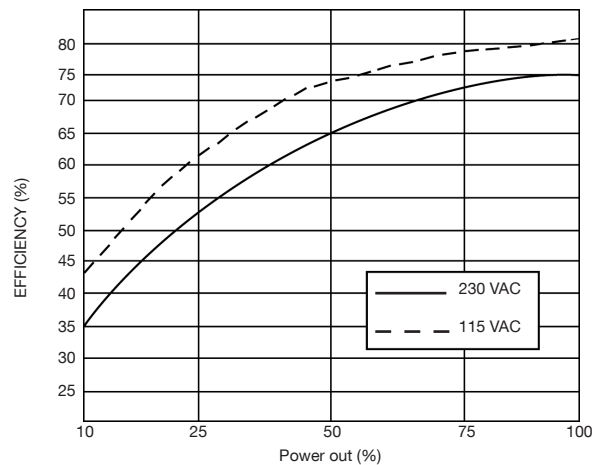

Installation

Ventilation and cooling	Normal convection All sides 25mm free space for cooling is recommended
Connector size range	
Spring terminal	AWG24-14 (0.2~2mm ²) flexible/solid cable, 10mm stripping at cable and recommends use copper conductors only, 60/75°C
Screw terminal	AWG26-12 (0.2~2.5mm ²) flexible/solid cable, con nector can withstand torque at max 0,56Nm (5 lbs-in). 4~5 mm stripping at cable and recom mends use copper conductors monly, 60/75°C
Max. torque for terminal	
Input terminal	0.56Nm (5.0lb-in)
Output terminal	0.56Nm (5.0lb-in)
General tollerance mm(in.)	
0.00 (0.00) ÷ 30.00 (1.18)	±0.30 (0.01)
30.00 (1.18) ÷ 120.00 (4.72)	±0.50 (0.02)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [DIN Rail Power Supplies](#) category:

Click to view products by [Carlo Gavazzi](#) manufacturer:

Other Similar products are found below :

[PS-S6024](#) [DVP01PU-S](#) [DVP06AD-S](#) [DVP06XA-S](#) [DVDPNET-SL](#) [DVPDT01-S](#) [DVPPS01](#) [PS-6012](#) [PS9Z-5R1G](#) [PS-C24024](#)
[DVP08ST11N](#) [DVPACAB530](#) [DVPCOPM-SL](#) [DVPEN01-SL](#) [DVPPF01-S](#) [ADNB008-48-1PM-C](#) [ADNB017-24-1PM-C](#) [ADNB040-24-1PM-C](#) [ADNB050-12-1PM-C](#) [ADNB040-15-1PM-C](#) [ADNB034-12-1PM-C](#) [S8TS-06024-E1](#) [PS-UPS40](#) [PSC-6024](#) [PSD-A60W12](#) [96PS-A120WDIN](#) [PSD-A60W48](#) [PSD-A40W12](#) [PSD-A40W24](#) [SMP21-L20-DC24V-5A](#) [PSD-A40W48](#) [S8T-DCBU-02](#) [PS-S4024](#) [NTPS-24-1.3](#)
[PST-96024](#) [S82YVSC4P](#) [PS-S4005](#) [PS-10024](#) [PS-S10024](#) [PS-C12024](#) [PSP-480S24](#) [PS-C48024](#) [PSC-2024](#) [PSC-4012](#) [PSC-4015](#) [PSC-4048](#)
[PSC-9615](#) [PSC-15124](#) [PSC-15148](#) [PSC-24148](#)