

PID Controllers Temperature Controls T2000




- 1/16 DIN and 1/32 DIN
- NEMA 4X protection
- Autotune automatically sets PID parameters
- Single ramp/soak program
- Heat-cool operation
- AC or DC power supply
- Inputs: Thermocouple, RTD, 0-50mV
- Two outputs: SSR voltage pulse/relay
- Five alarm modes
- RS232 or RS485 (retrofitable)
- MODBUS RTU protocol
- Three year warranty

Product Description

Microprocessor based controller for temperature measurements in °C or °F. Easy to view single or dual 4 digit display readout. Constructed in a rugged NEMA4X waterproof housing in the popular 1/32 or 1/16 DIN size. 100-240VAC or 12-24VDC supply voltage. Universal inputs and various combinations of output types are also standard features.

Ordering Key

T20 16 1 SR 2 A

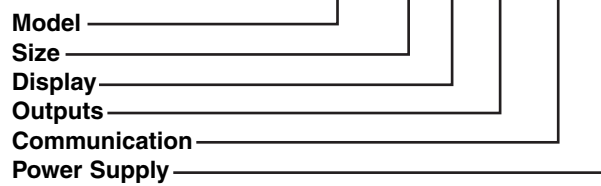

Type Selection

Model	Size	Display	Outputs	Communication	Power Supply
T20	16: 1/16 DIN 32: 1/32 DIN	1: Single Display 2: Dual Display (1/16 DIN only)	SR: 5VDC Pulse and 1A Relay Outputs RR: 2A and 1A Relay Output SS: Two 5VDC Pulse Outputs	X: None 2: RS232 4: RS485	A: 100-240VAC B: 12-24VAC/DC (Only single display units with SR and SS outputs)

General Specifications

Power supply	100-240VAC +/- 10%, 50-60Hz 12-24VAC/DC +/- 20%, 50-60Hz
Display	Upper display reading: 4 digit high brightness green LED 10mm high Lower display (T20162): 4 digit high brightness red LED 9mm high Output indicators: LED output indicators – flashing SP1 square green LED output indicators – SP2 round red
Keypad	3 full travel elastomeric pushbuttons
Approvals	UL, CE

Input Specifications

Thermocouple	
B	32 to 3275°F (0 to 1800°C)
E	32 to 1112°F (0 to 600°C)
J	32 to 1472°F (0 to 800°C)
K	-58 to 2192°F (-50 to 1200°C)
L	32 to 1472°F (0 to 800°C)
N	-58 to 2192°F (-50 to 1200°C)
R	32 to 2912°F (0 to 1600°C)

Input Specifications (cont'd)

Thermocouple (cont'd)	
S	32 to 2912°F (0 to 1600°C)
T	-273 to 482°F (-200 to 250°C)
Standards	IPTS/68/DIN 43710
CJC rejection	20:1 (0.05%/°C) typical
External resistance	100W maximum
(RTD)	
Pt100/RTD-2 (2 wire)	-273 to 752°F (-200 to 400°C)
Standards	DIN 43760 (100W 0°C/138.5W 100°C Pt)
Bulb current	0.2 mA maximum
Linear process input	
mV	0 to 50 mV (0 to 20 mV, 4 to 20 mV)
Specifications for Both Thermocouples and RTDs	
Calibration accuracy	+/- 0.25% maximum +/- 1°C
Sampling frequency	Input 10Hz, CJC 2 sec.
Common mode rejection	Negligible effect up to 140db, 240V, 50-60Hz
Series mode rejection	60db, 50-60Hz
Temperature coefficient	150ppm/(C maximum)
Reference conditions	22C +/- 2°C, rated voltage after 15 minutes settling time

T2000



Output Devices (maximum of two outputs)

SSd (solid state relay driver)	5 VDC +/- 15%, 15ma, non-isolated
Relay	Form A SPST, 2A/250VAC resistive load
Second Relay	Form A SPST, 1A/250VAC resistive load

Housing Specifications (cont'd)


Instrument body	
Model T2016	1.76 x 1.76" (44.8 x 44.8mm)
Model T2032	1.76 x 0.87" (44.8 x 22.0mm)
Overall length	4.57" (116mm)
Weight	
T20161	4.2 ounces
T20162	4.6 ounces
T2032	3.9 ounces

Housing Specifications


Environmental	
Temperature	UL873, EN61010, CSA 22.2 No. 1010.1-92
Humidity	Maximum 80%
Altitude	Up to 2000m
Installations	Categories II and III
Pollution	Degree II
Protection	NEMA 4X (IP66)
EMC emission	EN50081-1, FCC Rules 15 subpart J Class A
EMC immunity	EN50082-2
Ambient	32 to 122°F (0 to 50°C)
Moldings	Flame retardant polycarbonate

Dimensions (front fascia)	
Model T2016	2.0 x 2.0" (51 x 51mm) includes gasket
Model T2032	2.0 x 1.12" (51 x 28.5mm) includes gasket
Sleeve length	4.2" (106.7mm) includes gasket

Dimensions

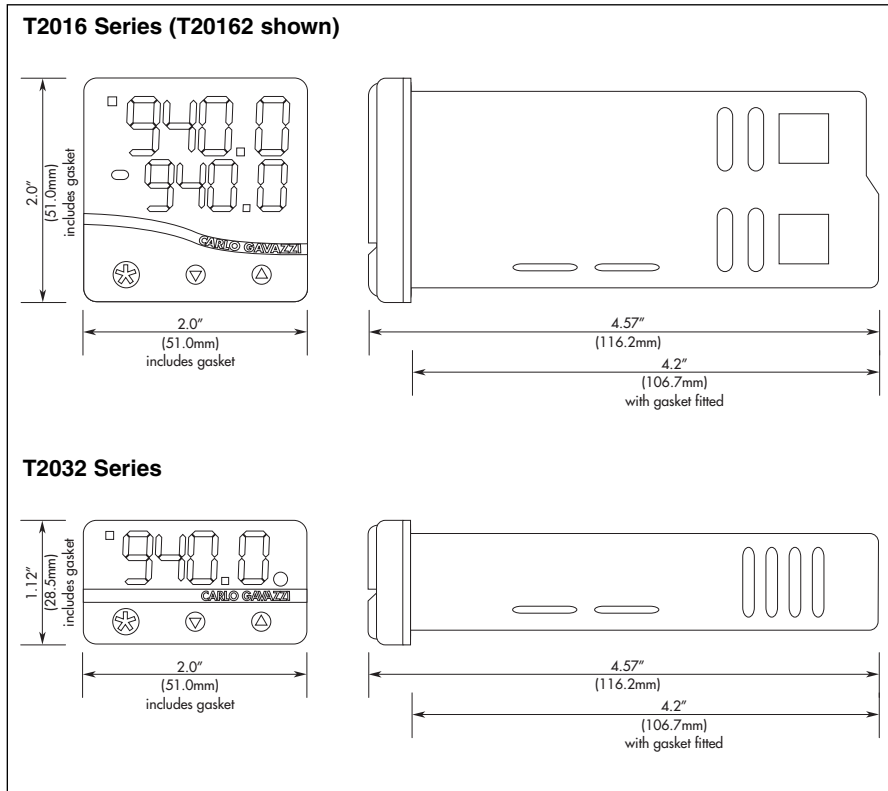

Wiring Diagram

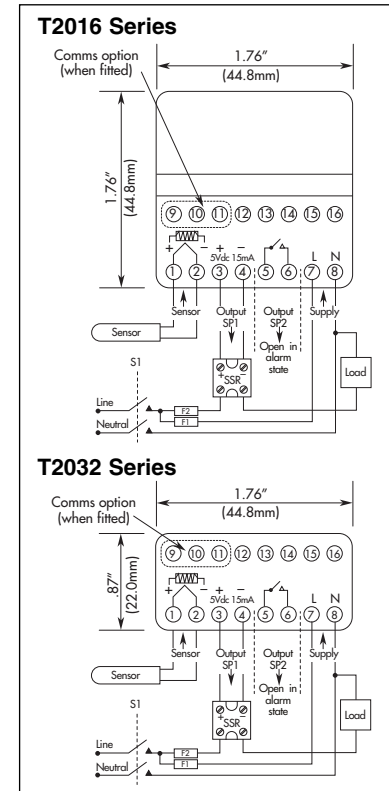

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Temperature Sensor Development Tools](#) category:

Click to view products by [Carlo Gavazzi](#) manufacturer:

Other Similar products are found below :

[DPP201Z000](#) [DPP202Z000](#) [DPP901Z000](#) [EVAL-ADT7516EBZ](#) [EVAL-ADT75EBZ](#) [T20162SRXA](#) [T20321SRXA](#) [MIKROE-912](#)
[WPP100B009](#) [T20321SS2B](#) [EVAL-CN0394-ARDZ](#) [MAX6581EVKIT+](#) [DS1921K#](#) [T2016P2CRRXC4S2](#) [T20162SS2A](#) [MAX6639EVKIT+](#)
[DC2608A-KIT](#) [DC2296A-KIT](#) [DC2608A](#) [DC2507A](#) [SL19](#) [ADM00902](#) [SECO-RSL10-CAM-GEVB](#) [TMP9A00-EP-EVM](#) [4821](#)
[LM74500Q1EVM](#) [EVAL-ADT7422MBZ](#) [EVAL-ADT7420MBZ](#) [MAXREFDES173#](#) [DS18B20EVKIT#](#) [EVAL-ADT7420ARDZ](#)
[MAX6654EVKIT](#) [EVAL-ADT7320MBZ](#) [EV-TEMPSENSE-ARDZ](#) [MIKROE-4316](#) [MIKROE-4194](#) [MAX1617AEVKIT](#) [MIKROE-3999](#)
[MIKROE-4301](#) [MIKROE-3994](#) [MIKROE-4295](#) [TMPSNSRD-RTD2](#) [MIKROE-2273](#) [MIKROE-2501](#) [MIKROE-2539](#) [MIKROE-2554](#)
[Kit_UDOO_Neo_TempSensor-PK](#) [LM96163EB/NOPB](#) [MIKROE-56](#) [TMP303CDRLR](#)