


Conductive Sensors Level Probes Types VT, VTI

CARLO GAVAZZI



- Excellent resistance to chemicals
- Teflon housing
- 1 to 4 electrodes
- Isolated (teflon) or unisolated electrodes
- Cable connection
- 1 1/2" pipe thread according to ISO 228/1-Gx"

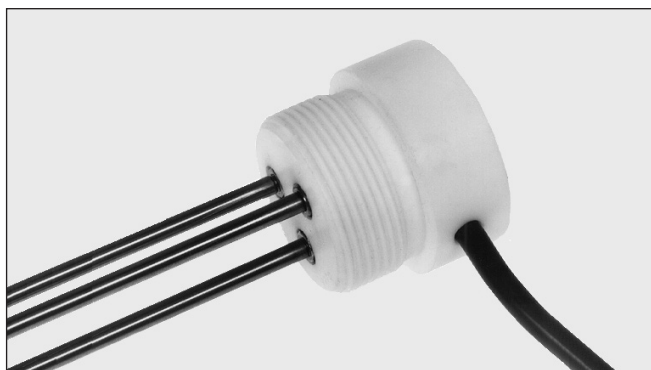

Product Description

Level sensor for measuring the level of conductive liquids, i.e. max./min. control of charging for discharging. The function is determined by the amplifier relay used. The sensors are delivered with

standard length electrodes - these are cut off to suit the application. The teflon housing makes the sensor excellent for use in rough environments.

Ordering Key

VTI 4

Type _____
Housing material _____
Isolated _____
Number of electrodes _____


Type Selection

Pipe thread	Electrode isolation	Ordering no. 1 electrode	Ordering no. 2 electrodes	Ordering no. 3 electrodes	Ordering no. 4 electrodes
1 1/2"	No	VT 1	VT 2	VT 3	VT 4
1 1/2"	Yes	VTI 1	VTI 2	VTI 3	VTI 4

Specifications

Electrodes	
Isolation	Teflon (PTFE)
VTI	Stainless steel
Material	AISI316/DIN1.4401
Standard length	100 cm
Diameter	Ø 5 mm
Housing	
Material	Teflon (PTFE)
Connection	Cable (silicone), 100 cm
Environment	
Degree of protection	IP 67
Operating temperature	0 to +145°C (+32° to +275°F)
Storage temperature	-40° to +160°C (-40° to +320°F)
Pressure	4 bar at 143°C
CE marking	IEC 529

Dimensions

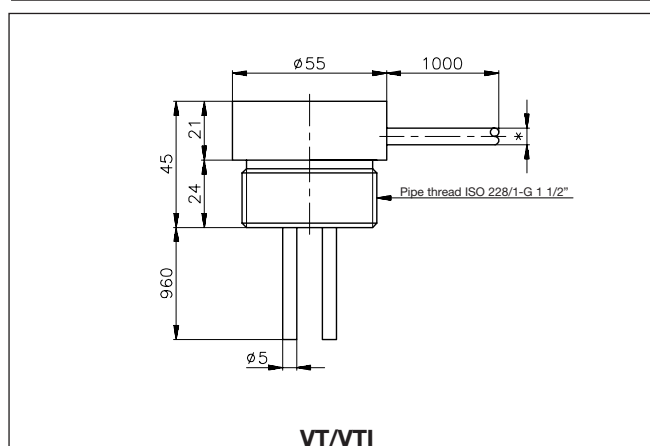

Mode of Operation

The length of the electrodes determines the levels which will be detected and the amplifier chosen determines the function (see SV..., S195/196, S1961, ELA, ELC or ELD). If the container is

made of a conductive material this can be used as common electrode.

Accessories

Extension joint for Ø5 mm electrodes:

VD1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Liquid Level Sensors](#) category:

Click to view products by [Carlo Gavazzi](#) manufacturer:

Other Similar products are found below :

[FSH-21](#) [FSH-25](#) [FSH-34](#) [FSH-35](#) [FSV-31](#) [FSV-35](#) [RSF54H100R1/8](#) [LRNH31S41](#) [F03-16SFC-10M](#) [F03-16PE-5M](#) [F03-16PT-5M](#) [LBFS](#)
[1151](#) [SCN-1518SC](#) [LL103000](#) [LRNR31N01](#) [MS03-PP](#) [F03-16SF-10M](#) [KSL-100-1](#) [LS01-1A66-PP-2000W](#) [LS01-1B66-PP-500W](#) [LS02-](#)
[1B66-S-500W](#) [LS02-1B85-PP-5000W](#) [LS03-1A85-PP-500W](#) [LS03/DL-1A85-PA-500W](#) [EL-10N](#) [EL-3N](#) [LRNH31S42](#) [59630-1-T-02-F](#)
[LS04-1B66-2-500W](#) [LFFS 011](#) [PS-3S \(Q\)](#) [T0-SKF-0.5](#) [T0-SKF-10](#) [T0-SKF-5](#) [VNI3](#) [CLP2FA1BM24](#) [CLE2P](#) [VNI1](#) [LBFS 0111](#) [LFFS 014](#)
[KSL-88-PP](#) [KSL-99-1](#) [LS02-1A85-PP-500W](#) [LS02-1B85-PP-500W](#) [LS03-1A85-PA-500W](#) [MIC 1000-20](#) [700670](#) [BAF147B002-00A0](#) [DFT-](#)
[110](#) [DFT-220](#)