


Sockets for RPY Relays


ZPY14A

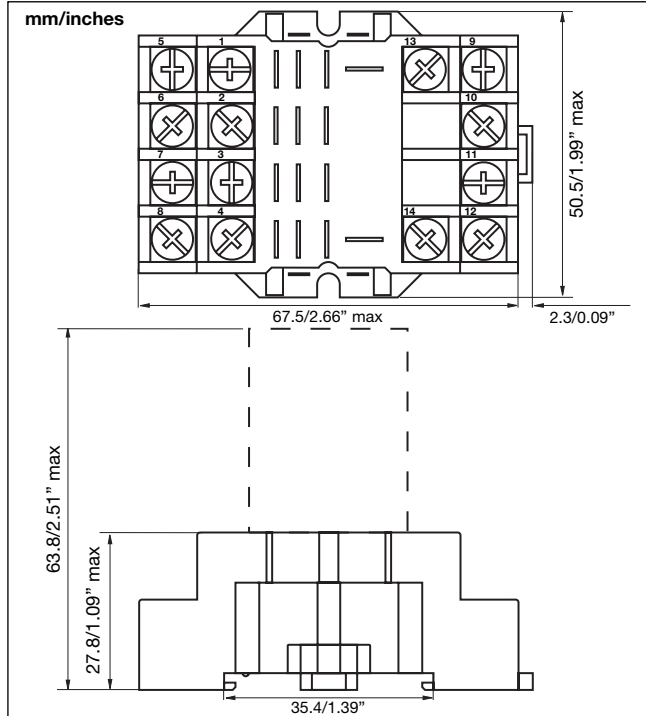


General data

Rated Voltage	400VAC
Rated Current	10A
Insulation Voltage	>4kV
Socket material	PA66 + GF (V0)
Socket colour	RAL 7035 / Pantone 1C
Contact material	Nickel Plated - Cu Zn 33
Terminal type	Screw cage
Screw type	M3 with combi head (slotted, Philips Gr.1, Pozi)
Max. screw torque	1.0N/m
Max wire section	0.5-2.5mm ² (20AWG 14AWG)
Operating temperature	-25° to +85°C (-13° to +185°F)
UL rating	10A 300VAC
UL temperature	0° to +60°C (+32° to +140°F)

Drilling pattern

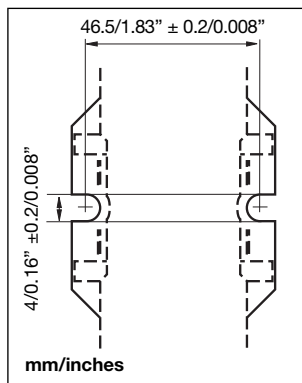

Wiring diagram

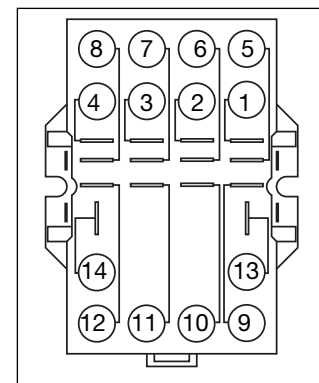

Approvals




Box content: 10 sockets
 Box size: (W 100 x D 71 x H 140) mm Weight: 840g
 (W 3.94 x D 2.80 x H 5.51) inches Weight: 29.63oz

Optional Accessories (to be ordered separately if required)

Hold-down spring steel SZPY 35M

Optional Springs for ZPY series

SZPY 35M

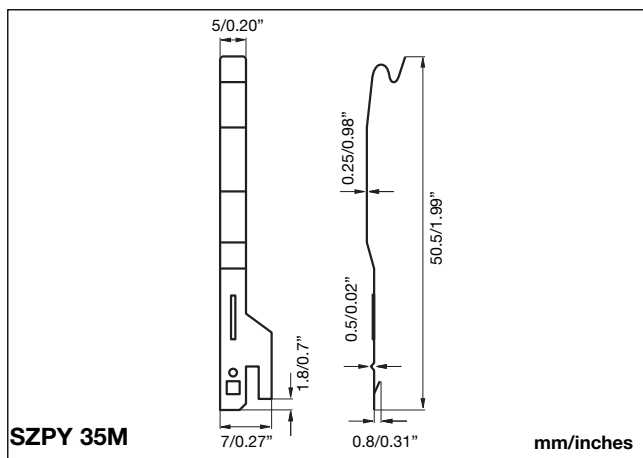

General data

Spring material

Stainless steel

Packaging

Box content: 1 plastic bag, 10pcs.

Weight: ~10g (0.36oz)

Note:

For each reley/socket are required at least 2 springs.

Up to 4 springs can be mounted.

RoHS
COMPLIANT

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Relay Sockets & Fixings](#) category:

Click to view products by [Carlo Gavazzi](#) manufacturer:

Other Similar products are found below :

[00008258500](#) [00111976502](#) [0000-825-81-00](#) [60SY4S05](#) [M41G](#) [670-0125](#) [670-0127](#) [6700152](#) [670-0153](#) [6700156](#) [D258-2TS00](#) [70-309](#) [7-1393143-3](#) [7-1616360-5](#) [8000-DG2-5](#) [911361](#) [9-1616339-5](#) [PJF11N](#) [GDA12HA](#) [GDA12HD](#) [GDA12SA](#) [GDA12SD](#) [GDA16HD](#) [GDA22HA](#) [GDA95A](#) [GDA95D](#) [GFX20](#) [PT08QN](#) [PT 1/8 D = 3.2](#) [GUA1](#) [GUA2-11](#) [GUA4-04](#) [GUA4-31](#) [GUM5R](#) [GUR-277](#) [GURX-277](#) [GUW12](#) [GUW95](#) [GUZ63L](#) [R99-11 FOR MY\(NAMEPLATE\)](#) [D52PR2T](#) [RES100K](#) [1310H-HDC](#) [1390H-1ST](#) [1393824-3](#) [1390H-2PC](#) [1410-2SM](#) [1410-3SM](#) [1419106-5](#) [RMOB 1-24 JR](#)