

C10GS is an LTE CAT 1/4 compatible Smart Cellular Modules based on 3GPP Release 10, that comes with an integrated eSIM. The integrated GNSS & eSIM, coupled with Cavli Hubble Global Connectivity ensures the module can be deployed across the globe, making it an ideal solution for logistics, automotive, vehicle tracking systems and more.

Re-imagining Cellular IoT Solutions

FEATURES

- Upgradable to CAT 4
- Compatibility with existing LTE networks
- Optimized for higher bandwidth including voice
- Paired for devices in mobility
- Perfect for localized applications such as -
 - Security and Surveillance, Point of Sales, Health Monitoring,-
 - Fleet Management and Asset Tracking

TECHNICAL SPECIFICATIONS

CAT 1/4: B1/B2/B3/B4/B5/B8/B18/B19/B20/B25/B26/B40/B66
 LTE: 3GPP E-UTRA Release 10 CAT 1/4
 Open Linux SDK support
 Protocols: TCP/IP/HTTP/HTTPS/MQTT/MQTTS/FTP/FTPS
 Location: GNSS* - GPS/GLONASS/BeiDou/Galileo/QZSS/SBAS

DATA-CONNECTIVITY

LTE CAT 1: 5Mbps (UL), 10Mbps (DL)
 LTE CAT 4: 50Mbps (UL), 150Mbps (DL)

PACKAGING

Dimension: 37 x 21.8 x 2.8 mm, LGA Package

TEMPERATURE RANGE


Normal working temperature: -20°C to +70°C
 Limit working temperature: -40°C to +85°C
 Storage temperature: -45°C to +90°C

INTERFACES

1.8V/3V SIM Interface
 Operating Voltage: 3.6V to 4.5V; Typ 3.8V
 1xUSB2.0, 3xUART, 1xSPI, 1xI2C, 1xUSIM, 13xGPIO, 1xSDIO, 1xPCM, 2x ANT*, 1xGMII/RGMII

APPLICABLE REGIONS

Global

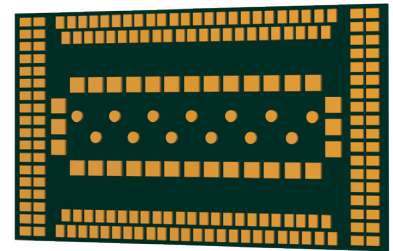

TECHNICAL HIGHLIGHTS

PARAMETERS	LTE CAT 1	LTE CAT 4
BANDWIDTH	10 MHz	20 MHz
PEAK DATA RATE	<10 Mbps	<150 Mbps
UPLINK SPEED	5 Mbps	50 Mbps
DOWNLINK SPEED	10 Mbps	150 Mbps
LATENCY	10ms	10ms
PENETRATION	Excellent	Excellent
VOICE	VoLTE	VoLTE

	CAT 1	CAT 4	GNSS	OpenSDK	Internal eSIM
C10GS-S001N	✓	✗	✗	✓	✗
C10GS-S001H	✓	✗	✗	✓	✓
C10GS-GNA1N	✓	✗	L1	✓	✗
C10GS-GNA1H	✓	✗	L1	✓	✓
C10GS-S004N	✗	✓	✗	✓	✗
C10GS-S004H	✗	✓	✗	✓	✓
C10GS-GNA4N	✗	✓	L1	✓	✗
C10GS-GNA4H	✗	✓	L1	✓	✓

Cavli Hubble™ is our proprietary Connectivity as a Service (CaaS) cloud platform for global cellular data subscription management, module & modem management, enabling businesses and industries to build and deploy easily scalable global wireless IoT solutions.



*Optional Features

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Development Boards & Kits - ARM category](#):

Click to view products by [CAVLI manufacturer](#):

Other Similar products are found below :

[CY4541](#) [OM13090UL](#) [Raspberry Pi 4 Model B,8GB](#) [YR0K77210B000BE](#) [B-U585I-IOT02A](#) [NUCLEO-C031C6](#) [NUCLEO-U5A5ZJ-Q](#)
[NUCLEO-WL55JC1](#) [STM32MP135F-DK](#) [ZDSD-Pinboard](#) [081ZYKFB](#) [LKS32MC034DOF6Q8-k](#) [LKS32MC077MBS8-K](#)
[LKS32MC038Y6P8B-K](#) [LKS32MC071DOC8T8-K](#) [LKS32MC074DOF8Q8-K](#) [LKS32MC071CBT8-K](#) [LKS32MC038Y6P8-k](#) [Ai-WB2-32S-](#)
[Kit](#) [GD32E103T-START](#) [GD32L233K-START](#) [RTK7F124FPC01000BJ](#) [XDS601](#) [RP2040-Tiny](#) [M6G2C-256LI](#) [YT37](#)
[LKS32MC033H6P8B-K](#) [VC-02-Kit_EN](#) [Ra-08H-Kit](#) [Hi-12FL-Kit](#) [PB-03M-Kit](#) [Ai-WB2-13-Kit](#) [PB-03F-Kit](#) [Ra-08-Kit](#) [Hi-07SL-Kit](#) [Hi-](#)
[07S-Kit](#) [Ai-WB2-12F-Kit](#) [PB-03-Kit](#) [Hi-12F-Kit](#) [AT-START-F437](#) [AT-START-F407](#) [E104-BT40-TB](#) [FT8132Q-3HALL-FOC+EMF](#)
[APM32F072VBT6](#) [APM32F091VC MINI](#) [APM32F407IG-MINIBOARD](#) [APM32F003F6P6-MINIBOARD](#) [APM32F051R8 MINI](#)
[GD32EPRTV-START](#) [GD32FPRT-START](#)