


## THREE PHASE ANGLE CONTROLLER




- ▶ Adapted to three phase star (without neutral) or delta connected loads (other wiring configurations on demand)
- ▶ Very low initial value regarding competition
- ▶ Small housing.
- ▶ Large mains frequency and voltage range.
- ▶ Fully opto-isolated full cycle three phase, phase angle controller (balanced currents, less harmonics, ...)
- ▶ Lot of possible options on demand (ramps, additional settings...).

# SGTA4654



Proportional Analog Voltage Control Input  
**4-20mA**  
**300->510VAC**  
**50A AC-51**

| Mains Voltage | Mains Frequency | Max AC-51 Current   | Control Input | In / Out / Case Insulation | Type of connections | Dimensions (WxHxD) | Weight |
|---------------|-----------------|---------------------|---------------|----------------------------|---------------------|--------------------|--------|
| 300 to 510VAC | 40 to 65Hz      | 50A (with heatsink) | 4-20mADC      | 4kV                        | Round tabs          | 100x73.5x39.5 (mm) | 350g   |

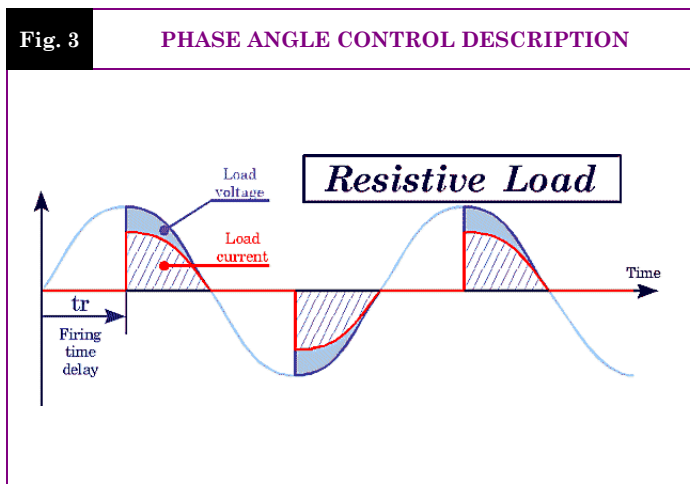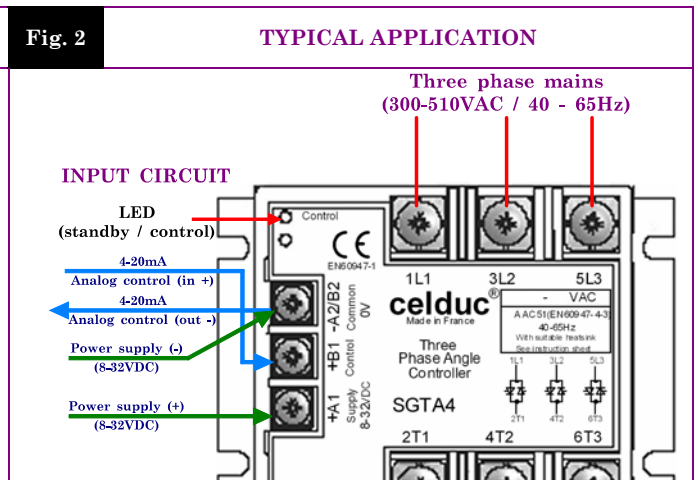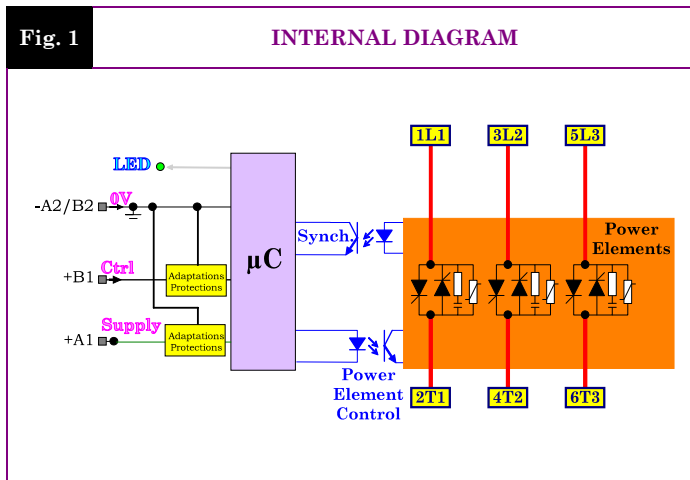

| LED status | Power output status | Remarks                            |
|------------|---------------------|------------------------------------|
| ○          | OFF                 | One or several mains phase missing |
| ⊕          | OFF                 | Standby mode                       |
| ⊕          | ON                  | Phase angle control                |
| ●          | ON                  | Full power                         |

Proud to serve you

**INPUT CHARACTERISTICS**

| ANALOG CONTROL INPUT | CHARACTERISTIC                  | LABEL         | VALUE            | INFO.      |
|----------------------|---------------------------------|---------------|------------------|------------|
|                      | Label                           |               | <b>Control</b>   |            |
|                      | Terminals                       |               | +B1 & -A2/B2     |            |
|                      | Control current range           | <b>Ic</b>     | 4-20mADC         |            |
|                      | Release and control threshold   | <b>Icsmin</b> | 4mA              |            |
|                      | Full power control threshold    | <b>Icsmax</b> | 19.7mADC         |            |
|                      | Max. current (direct & reverse) | <b>Icmax</b>  | 32mADC           |            |
|                      | Input impedance                 | <b>Re</b>     | 250Ω             |            |
| SUPPLY INPUT         | Label                           |               | <b>Supply</b>    |            |
|                      | Terminals                       |               | +A1 & -A2/B2     |            |
|                      | Operating voltage range         | <b>Us</b>     | Filtered 8-32VDC |            |
|                      | Max. consumption                | <b>Is</b>     | 15mA             | See fig. 6 |

**OUTPUT CHARACTERISTICS**

| POWER CIRCUIT | CHARACTERISTIC  | LABEL                | VALUE   | INFO.                      |
|---------------|---|----------------------|---|----------------------------|
|               | Mains voltage range                                     | <b>Ue</b>            | <b>300 -&gt; 510VAC</b>                                 |                            |
|               | Non-repetitive peak voltage                             | <b>Uep</b>           | 1200V   |                            |
|               | Overvoltage protection                                  | <b>VDR</b>           | Built-in 510V size 14 varistors                         |                            |
|               | Maximum nominal current                                 | <b>Ithmax (AC51)</b> | 50A   | With heatsink (See fig. 8) |
|               | Non-repetitive peak overload current (1 cycle of 10ms)  | <b>ITSM</b>          | 550A  | See fig. 8                 |
|               | Melting limit for choosing the protective fuses         | <b>I²t</b>           | 1500A²s   | @10ms                      |
|               | Minimum load current                                    | <b>Iemin</b>         | 100mA   |                            |
|               | Maximum leakage current                                 | <b>Ielk</b>          | 7mA   | @400VAC 50Hz               |
|               | Load power factor                                       | <b>Pf</b>            | 0.8->1  |                            |
|               | Mains frequency range                                   | <b>F</b>             | 40->65Hz  |                            |
|               | Max. off-state voltage rise                             | <b>dv/dt</b>         | 500V/μs   |                            |
|               | Protection against fast voltage transients              |                      | Built-in RC network                                     |                            |
|               | Max. current rise                                       | <b>di/dt</b>         | 50A/μs  |                            |
|               | On-state voltage drop                                   | <b>Ud</b>            | $0.9 \times V_{to} \times I_{th} + r_t \times I_{th}^2$ |                            |
|               | On-state resistance                                     | <b>rt</b>            | 12mΩ  | @125°C                     |
|               | On-state voltage  | <b>Vto</b>           | 0.9V  | @125°C                     |
|               | Maximum junction temperature                            | <b>Tjmax</b>         | 125°C   |                            |
|               | Junction/case thermal resistance per power element      | <b>Rthjc</b>         | 0.45K/W   | Total = 3 power elements   |
|               | Built-in heatsink thermal resistance vertically mounted | <b>Rthra</b>         | 4K/W  | @ΔTra=60°C                 |
|               | Heatsink thermal time constant                          | <b>Tthra</b>         | 15min   | @ΔTra=60°C                 |
|               | Inputs/case/power outputs insulation voltages           | <b>Uimp</b>          | 4kV   |                            |
|               | Isolation resistance                                    | <b>Rio</b>           | 1GΩ   |                            |
|               | Isolation capacitance                                   | <b>Cio</b>           | <8pF  |                            |
|               | Storage ambient temperature                             | <b>Tstg</b>          | -40->+100°C   |                            |
|               | Operating ambient temperature                           | <b>Tamb</b>          | -40->+90°C  | See fig. 7                 |
|               | Max. case temperature                                   | <b>Tc</b>            | 100°C   |                            |

**GENERAL INFORMATION**

|                    |                             |  |                       |              |  |
|--------------------|-----------------------------|--|-----------------------|--------------|--|
| <b>CONNECTIONS</b> | Connections                 |  | Power                 | Input        |  |
|                    | Type                        |  | Round tabs            |              |  |
|                    | Screwdriver (advised)       |  | Philips™ Nr2          | Philips™ Nr1 |  |
|                    | Tightening torque (advised) |  | 1.8Nm                 | 0.8Nm        |  |
| <b>MISC.</b>       | Housing                     |  | UL94V0                |              |  |
|                    | Mounting                    |  | Panel – 4 x M4, 1.5Nm |              |  |
|                    | Noise level                 |  | No Noise              |              |  |
|                    | Weight                      |  | 350g                  |              |  |


**STANDARDS**

|                |                                 |  |             |  |
|----------------|---------------------------------|--|-------------|--|
| <b>GENERAL</b> | Standards                       |  | EN60947-4-3 |  |
|                | Protection level                |  | IP00        |  |
|                | Protection against direct touch |  | No          |  |
|                | CE marking                      |  | Yes         |  |
|                | UL, cUL and VDE approvals       |  | Pending     |  |

|                        | TYPE OF TEST                      | STANDARD     | LEVEL  | EFFECT    |
|------------------------|-----------------------------------|--------------|--|-----------|
| <b>E.M.C. IMMUNITY</b> | E.S.D. (Electrostatic discharges) | EN61000-4-2  | 8kV (air)<br>4kV (touch)   | No effect |
|                        | Radiated electromagnetic fields   | EN61000-4-3  | 10V/m  | No effect |
|                        | Fast transients bursts            | EN61000-4-4  | 2kV direct coupling on the power side<br>2kV coupling by clamp on the input side                               | No effect |
|                        | Electric chocks                   | EN61000-4-5  | 1kV direct coupling differential mode (input and output)<br>2kV direct coupling common mode (input and output) | No effect |
|                        | Voltage drop                      | EN61000-4-11 | -  |           |


|                        |                                     |           |  |
|------------------------|-------------------------------------|-----------|--|
| <b>E.M.C. EMISSION</b> | Radiated and conducted disturbances | NFEN55011 | <p>The conducted or radiated disturbances generated by solid-state relays depend on the wiring and load configuration.</p> <p>The test method recommended by the European standards and concerning electromagnetic compatibility leading to results far from reality, we decided to advise our customer in order to adapt their filtering scheme to their application.</p> <p><b>Please contact us if you are concerned about E.M.C.</b></p> |
|------------------------|-------------------------------------|-----------|--|

**TRANSFERT CHARACTERISTIC**

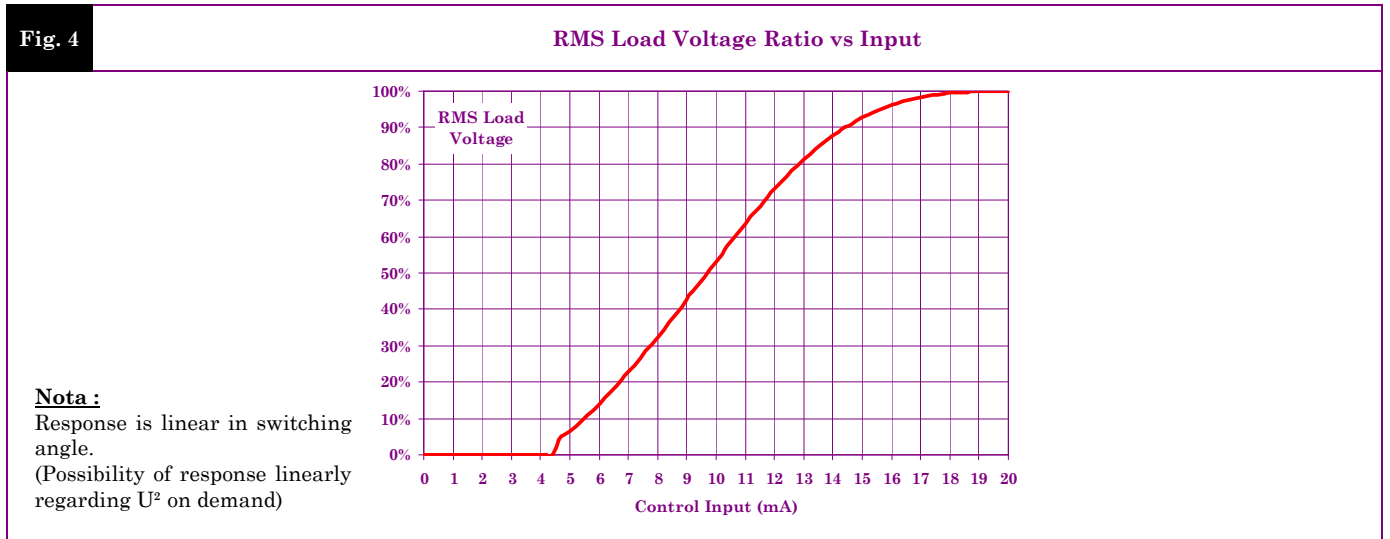


**CHARACTERISTIC CURVES**


**Fig. 5 INPUT CHARACTERISTIC**

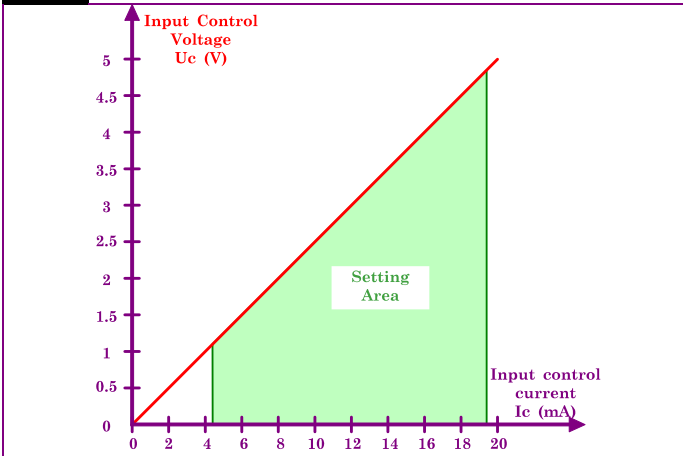


**Fig. 6 POWER SUPPLY CHARACTERISTIC**

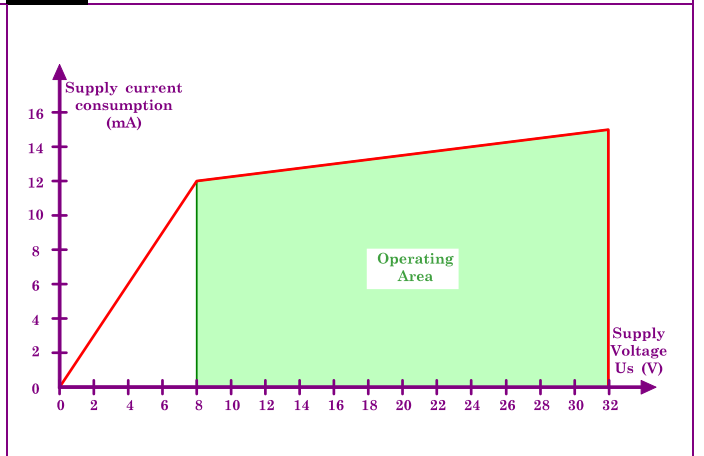

**Fig. 7 POWER DISSIPATION AND LOAD CURRENT VS AMBIENT TEMPERATURE**

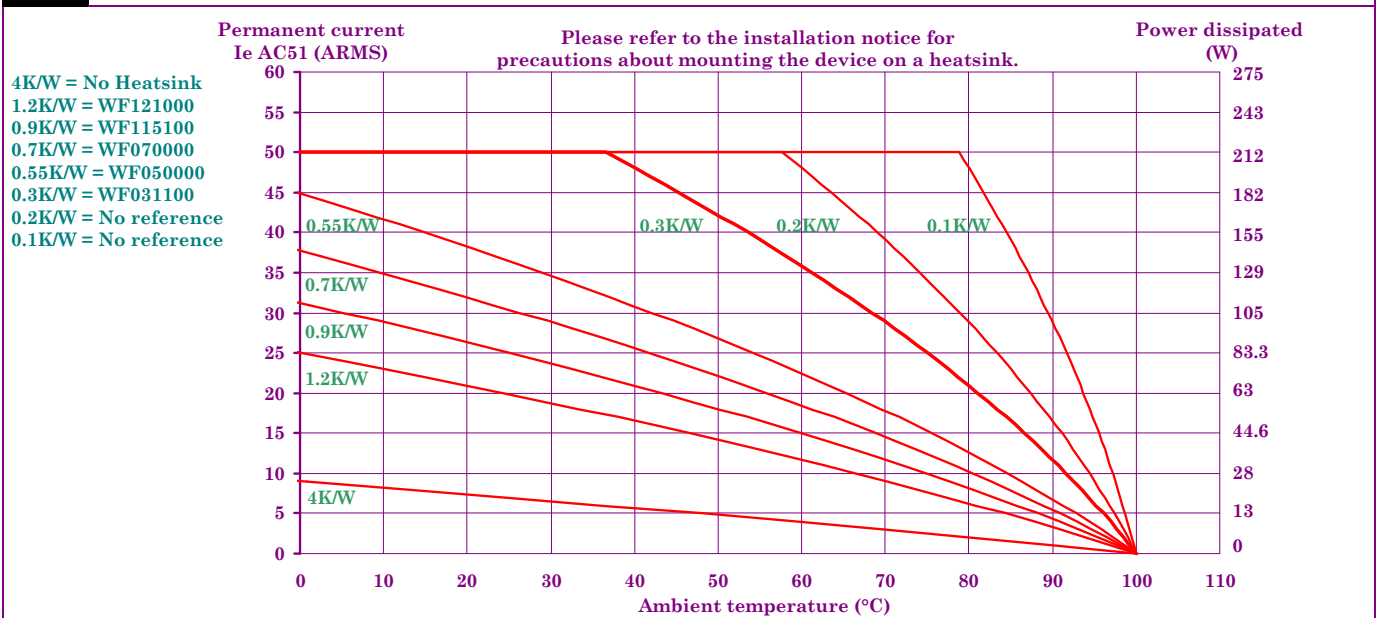

**Fig. 8 CURRENT OVERLOAD CHARACTERISTIC (ITSM PER POWER ELEMENT)**

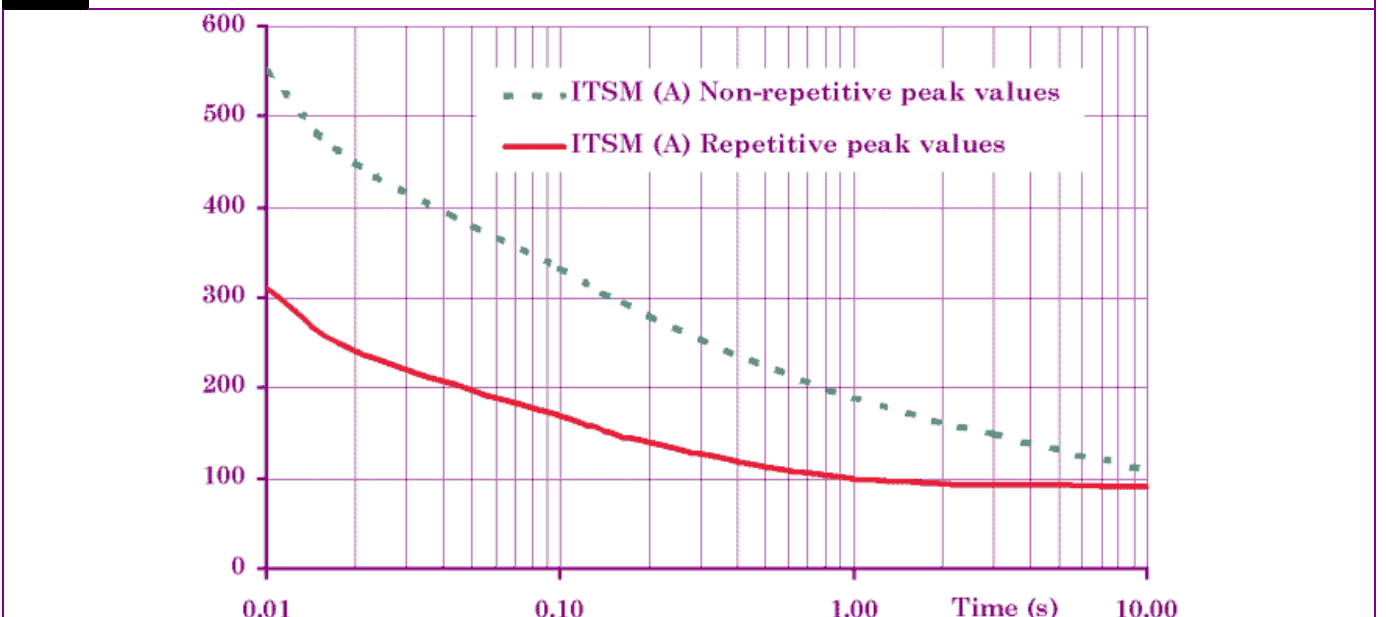

**DIMENSIONS AND ACCESSORIES**

Fig. 9

**DIMENSIONS**


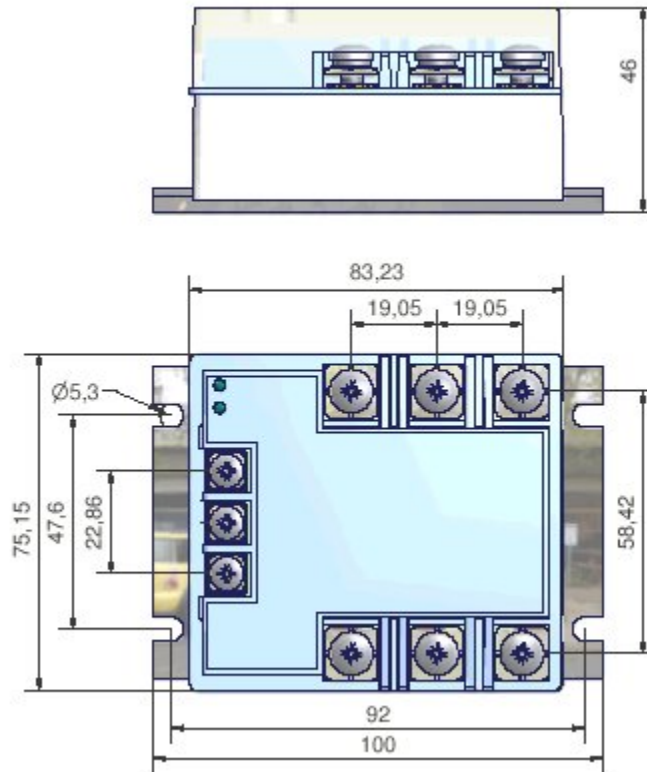


Fig. 10

**ACCESSORIES**

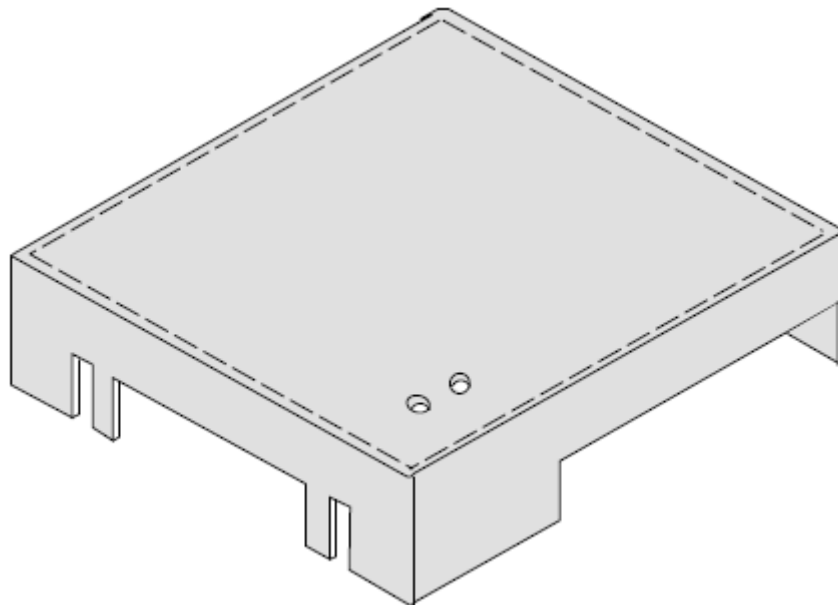

**Protective cover 1K199000**

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Solid State Relays - PCB Mount](#) category:*

*Click to view products by [Celduc](#) manufacturer:*

Other Similar products are found below :

[M86F-2W](#) [M90F-2Y](#) [G2-1A07-ST](#) [G2-1A07-TT](#) [G2-1B02-TT](#) [G2-DA06-ST](#) [923812OCAS](#) [PLA134S](#) [DS11-1005](#) [AQV210EHJ](#) [AQV212J](#)  
[AQV252GAJ](#) [AQY210ST](#) [AQY221N2SJ](#) [AQY221R2SJ](#) [AQY410SXJ](#) [AQY412EHAJ](#) [EFR1200480A150](#) [901-7](#) [LCA220](#) [LCB110S](#)  
[1618400-5](#) [SR75-1ST](#) [AQH2213AJ](#) [AQV112KLJ](#) [AQV212AJ](#) [AQV212SXJ](#) [AQV238AD01](#) [AQW414TS](#) [AQY221N2SYD01](#)  
[AQY221N2V1YJ](#) [AQY221N3VJ](#) [AQY221R2VJ](#) [AQY275AXJ](#) [AQY414SXE01](#) [G2-1A02-ST](#) [G2-1A03-ST](#) [G2-1A03-TT](#) [G2-1A05-ST](#) [G2-](#)  
[1A06-TT](#) [G2-1A23-TT](#) [G2-1B01-ST](#) [G2-1B01-TT](#) [G2-1B02-ST](#) [G2-DA03-ST](#) [G2-DA03-TT](#) [G2-DA06-TT](#) [CPC1333GR](#) [3-1617776-2](#)  
[CTA2425](#)