

CLD-2412-T2-E series

24W Switching Power Supply



■ Features:

- Constant voltage design
- European AC input
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Cooling by free air convection
- Isolation class II



Ⓞ ELECTRICAL SPECIFICATION

MODEL	CLD 2412 T2 E
OUTPUT	
Rated Voltage	12V
Rated Current	2A
Rated Power	24W
Line Regulation	± 1%
Load Regulation	± 2%
Tolerance [3]	± 5%
Ripple & Noise (max.) [2]	180 mV _{P-P}
Setup, Rise Time [4]	300ms, 20ms / 230VAC at full load
Hold up Time	50ms / 230VAC at full load
INPUT	
Voltage Range	100 ÷ 264VAC
Frequency Range	47 ÷ 63Hz
Efficiency (typ.)	82.5%
AC Current (typ.)	0.7A / 115VAC, 0.35A / 230VAC
PROTECTIONS	
Overload	Range: 110 ÷ 150% rated current
	Type: hiccup mode, auto-recovery.
Short Circuit	Type: hiccup mode, auto-recovery.
Over voltage	18 ÷ 25VDC
	Type: hiccup mode, auto-recovery.
Over temperature	140°C±10°C(detect on main control IC)
	Type: hiccup mode, auto-recovery.

CLD-2412-T2-E series

24W Switching Power Supply



WORKING ENVIRONMENT

Working Temperature	0°C ÷ 40°C
Working Humidity	5 ÷ 95% RH non-condensing
Storage Temperature and Humidity	-20°C ÷ 85°C, 5 ÷ 95% RH non-condensing

SAFETY AND EMC REGULATIONS [5]


Safety Standards	Compliance to EN60950-1
Withstand Voltage	I-P/O-P: 3.0kVAC; I-P/GND: 1.5kVAC; O-P/GND: 0.5kVAC
EMC Emission	Compliance to EN55022
EMC Immunity	Compliance to EN55024
Harmonic Current	Compliance to EN61000-3-3; EN61000-3-2

OTHERS

Dimensions	85 x 89 x 35.5 x 27.5mm (length x total length x width x height)
Weight and Packing	0.2kg; 50pcs./ctn; ctn weight and dimensions: 11.5kg; 48.5 x 32.5 x 40cm

1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.
2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1μF i 47μF parallel capacitor.
3. Tolerance includes set up tolerance, line regulation and load regulation.
4. Setup and rise time is measured from 0 to 90% rated output voltage.
5. According to EN61204-3 standard power supply is considered as component not indented to apply by end-user. It might turn out to use additional EMI filter (eq. 061B2S) or/and ferite cores (eq. 74271222) mounted on input and output wires to achieve compliance with EMC standards. The final equipment with power supply must be re-quality to comply with EMC Directives.

MECHANICAL SPECIFICATION

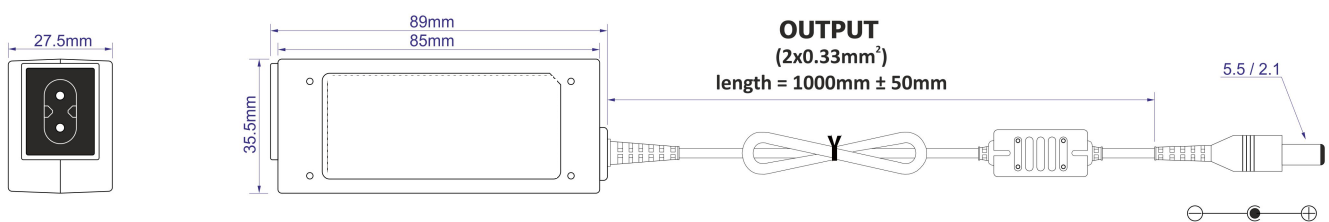

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Desktop AC Adapters](#) category:

Click to view products by [Cellevia](#) manufacturer:

Other Similar products are found below :

[YS50-1903150](#) [ADP-40KD BBBM](#) [DTA27-3X-W-5](#) [212A2136](#) [ADP485-01](#) [SWA-1202](#) [SWA-1501](#) [212A2220](#) [212A2220-02](#) [212A2220-04](#)
[FWE030015A-10A](#) [TRH100A135-02E12-Level-VI](#) [TRH100A180-11E13-Level-VI](#) [TRH100A240-01E13-Level-VI](#) [TRH100A280-01E13-](#)
[Level-VI](#) [TRH100A280-11E13-Level-VI](#) [TRH50A120-02E01-Level-VI](#) [TRH50A120-12E01-Level-VI](#) [TRH50A120-40E01-Level-VI](#)
[TRH50A150-12E12-Level-VI](#) [TRH50A180-11E03-Level-VI](#) [TRH50A240-02E03-Level-VI](#) [TRH70A120-11E01-Level-VI](#) [TRH70A150-](#)
[12E02-Level-VI](#) [TRH70A240-11E03-Level-VI](#) [416FG41017](#) [DTA27-0512FWX-W3](#) [TRH100A120-02E12-Level-VI](#) [TRH100A150-11E12-](#)
[Level-VI](#) [TRH100A180-02E13-Level-VI](#) [TRH100A240-02E13-Level-VI](#) [TRH100A240-36E13-Level-VI](#) [TRH100A280-12E13-Level-VI](#)
[TRH100A480-11E13-Level-VI](#) [TRH100A480-12E13-Level-VI](#) [TRH50A120-11E01-Level-VI](#) [TRH50A120-49E01-Level-VI](#) [TRH50A150-](#)
[11E02-Level-VI](#) [TRH50A150-12E02-Level-VI](#) [TRH70A120-01E01-Level-VI](#) [TRH70A480-02E03-Level-VI](#) [KR8-PS01](#) [1894875](#)
[FWE030012A-10A](#) [FWE050024B-10A](#) [820A4080G](#) [825A0052-03](#) [825A0057-03](#) [SWA-1704W](#) [AD5012N2LM-\(401\)](#)