



# CLD-3612-T2-E25

12V / 3A Desktop type AC/DC adaptor



## ■ Features:

- Universal AC input / Full range
- Desktop type, Isolation class II design
- ErP step II / CEC level VI compliance
- No load power consumption  $P < 0.075W$
- Protections: Overload / Short circuit / Over Temperature



## ELECTRICAL SPECIFICATION

<b>MODEL</b>	CLD-3612-T2-E25
<b>OUTPUT</b>	
<i>Rated Voltage</i>	12V
<i>Rated Current</i>	3A
<i>Current Range</i>	0 ÷ 3A
<i>Rated Power</i>	36W
<i>Line Regulation</i>	± 1%
<i>Load Regulation</i>	± 2%
<i>Tolerance [3]</i>	± 5%
<i>Ripple &amp; Noise (max.) [2]</i>	720mV <sub>p-p</sub>
<i>Setup, Rise Time [4]</i>	250ms, 10ms / 230VAC at full load
<i>Hold up Time (typ.)</i>	50ms / 230VAC at full load

<b>INPUT</b>	
<i>Voltage Range</i>	100 ÷ 264VAC
<i>Frequency Range</i>	47 ÷ 63Hz
<i>Efficiency (typ.)</i>	84.98%
<i>AC Current (typ.)</i>	1A / 115VAC, 0.5A / 230VAC
<i>No load Power Consumption (max.)</i>	0.075W

<b>PROTECTIONS</b>	
<i>Overload</i>	Range: 150 ÷ 200% Type: hiccup mode, auto-recovery.
<i>Short Circuit</i>	Type: hiccup mode, auto-recovery.
<i>Over voltage</i>	Range: 18 ÷ 25V, auto-recovery. Type: hiccup mode, auto-recovery



# CLD-3612-T2-E25

12V / 3A Desktop type AC/DC adaptor

## WORKING ENVIRONMENT

<b>Working Temperature</b>	0°C ÷ 40°C
<b>Working Humidity</b>	10 ÷ 95% RH non-condensing
<b>Storage Temperature and Humidity</b>	-20°C ÷ 85°C, 5 ÷ 95% RH non-condensing


## SAFETY and EMC REGULATIONS

<b>Safety Standards</b>	Compliance to EN 60950-1
<b>Withstand Voltage</b>	I-P/O-P: 3.0kVAC; I-P/GND: 1.5kVAC; O-P/GND: 0.5kVAC
<b>Isolation Resistance</b>	IN/OUT: 100MΩ/500VDC/25°C/70%
<b>EMC Emission</b>	Compliance to EN55032
<b>EMC Immunity</b>	Compliance to EN61000-4-2, -3, -4, -5
<b>Harmonic Current</b>	Compliance to EN61000-3-3; EN61000-3-2

## OTHERS

<b>Wire and plug</b>	Wire: 22AWG, length = 100cm ±50mm	Plug: 2.5/5.5, positive inside
<b>Dimensions</b>	115 x 50.5 x 31mm (L x W x H)	
<b>Net Weight</b>	241g	

1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.
2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1μF i 47μF parallel capacitor.
3. Tolerance includes set up tolerance, line regulation and load regulation.
4. Setup and rise time is measured from 0 to 90% rated output voltage.
5. Power supply is considered as component not indented to apply by end-user. Power supply meets safety and EMC standards however the final equipment with power supply must be re-quality to comply with EMC Directives.

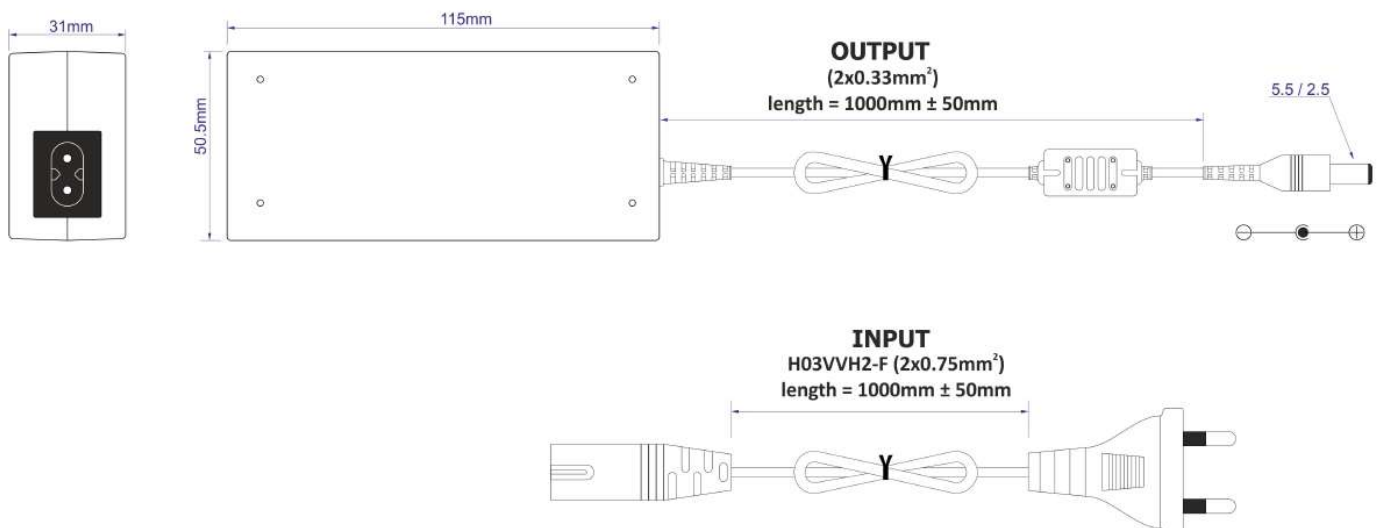

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Desktop AC Adapters](#) category:*

*Click to view products by [Cellevia](#) manufacturer:*

Other Similar products are found below :

[212A2136](#) [ADP485-01](#) [SWA-1202](#) [SWA-1501](#) [212A2220](#) [432703037451](#) [KR8-PS01](#) [1894875](#) [FWE050024B-10A](#) [820A4080G](#) [825A0057-03](#) [SWA-1704W](#) [AD5012N2LM-\(401\)](#) [SDI65-24-UDC-P5R](#) [TRH21A120-49E03-Level-VI](#) [FWC100024A-11A](#) [FWE050012B-10A](#) [AC-DC ADAPTER 90W w/ Cable](#) [FWA065024A-11A](#) [PSA120U-560L6](#) [FWE050024A-10A](#) [96PSA-A63W18V1-M](#) [1895235](#) [PW-C0725-W2-B](#) [57-U1](#) [57-U2](#) [CENB1040A1245F02](#) [SED80N2-16.0](#) [SED80N3-16.0](#) [RFQ43442-01](#) [YS50-1903150](#) [50966124050E](#) [96PSA-A36W12R1-3](#) [PCM50UT04](#) [PCM50UT05](#) [Adapter 24V230W FSP230-AAAN3 WIRE FSP](#) [TRH100A240-11E12 VI](#) [TR70MB360-01E03 VI](#) [TRH50A240-11E01 VI](#) [TRE36A120-01G03 VI](#) [TRH100A180-11E12 VI](#) [POSC12250D-C8-WH](#) [POSC12300D-C8-WH](#) [POSC12500D-C8-WH](#) [SYS1588-3015-T2](#) [SYS1588-3018-T2](#) [SYS1588-3024-T2](#) [CPSUNOTAKY-07056](#) [CPSUNOTAKY-07058](#) [CPSUNOTAKY-07168](#)