

# 产品承认书

## SPECIFICATION FOR APPROVED

版本: REV.A3

客户

8826

Customer

客户料号

S16100116

Customer P/N

品名

RADIAL TYPE CHOKE INDUCTOR

Description

产品型号

CKPP0507-10uH/M-U3.5

CENKER P/N

图纸编号

SP-CK112-00038028

Drawing No.

产品编号

Product code.

出图

DRAWING

制表

审核

批准

Prepared By

Checked By

Approved By

覃玉云

韦秀华

梁秀勇

DATE:

2020/7/2

承认

CUSTOMER APPROVAL

DATE:

### 深圳市岑科实业有限公司

SHENZHEN CENKER ENTERPRISE LTD.

地址:深圳市龙华区清泉路金博龙工业园C栋

Address: Building No.C Jinbolong Industrial  
Estate, Qingquan Road, Longhua District, Shenzhen  
P.R.China

TEL: 0755-89808755 FAX: 0755-27525256



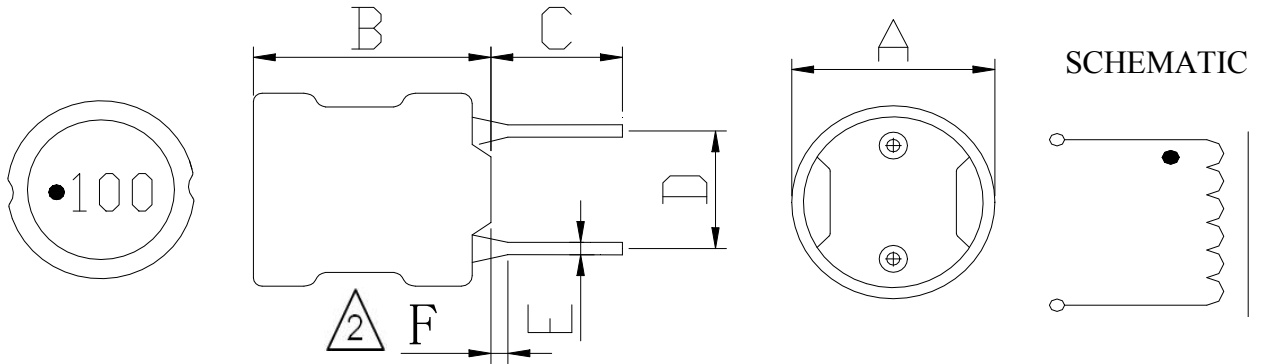


# SPECIFICATION FOR APPROVAL

**RoHS COMPLIANT**

CUSTOMER	8826	CUSTOMER No.	S16100116	PAGE
CENKER P/N	CKPP0507-10uH/M-U3.5	DRAWING No.	SP-CK112-00038028	1/6
ISSUE DATE	2020/7/2	VERSION	A3	


## 1、 DIMENSION (mm):



NOTE: ● Start of winding, Casing sets of flat top of the magnetic core; “F” Means wrapping height.

③	A	B	C	D	E	F
	Φ6.5Max	8.5 Max	3.5±0.5	2.5±0.5	Φ0.5 Ref	3.0Max

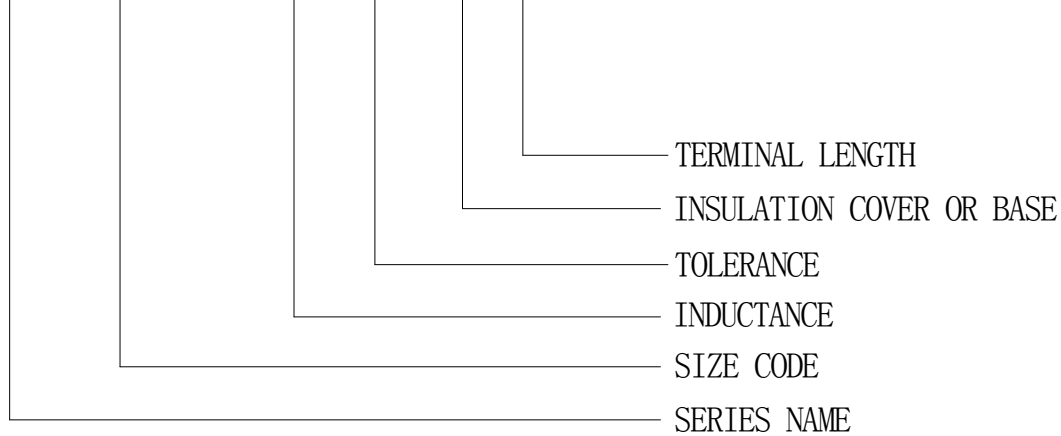CKPP 0507 - 10uH M - U 3.5



## 2、 TEMPERATURE RATING:

Operating Temperature : -40℃ ~ +125℃ ; Storage Temperature : -20℃ ~ +40℃

 <p>深圳市岑科实业有限公司 SHEN ZHEN CENKER ENTERPRISE LTD. TEL:0755-89808755 FAX:0755-27525256</p>	PREPARED	CHECKED	APPROVED
	覃玉云	韦秀华	梁秀勇

# SPECIFICATION FOR APPROVAL

**RoHS COMPLIANT**

CUSTOMER	8826	CUSTOMER No.	S16100116	PAGE 2/6
CENKER P/N	CKPP0507-10uH/M-U3.5	DRAWING No.	SP-CK112-00038028	
ISSUE DATE	2020/7/2	VERSION	A3	

### 3、 ELECTRICAL REQUIREMENTS:

ITEM	SPEC.	TOLERANCE	TEST FREQUENCY	TEST EQUIPMENT
INDUCTANCE	10μH	±20%	100kHz/5mA	HP-4284A
DCR	80mΩ	Max.	at 25℃	Keysight 34420A
Isat	2.6A	L0A×90% Ref.	100kHz/5mA	HP-4284A+HP-42841A
Irms	2.5A	ΔT≤40℃	100kHz/5mA	HP-4284A+HP-42841A
SRF	16MHz	TYP		HP-4291A

### 4、 MATERIAL LIST:

No.	Material	Specification	Supplier	UL.
1	Core	DRT 5×7.5 or equivalent	NAN NING JINGWEI ELECTRONICS CO., LTD.	
2	Wire	Ø0.35mm×22.5Ts. Ref. (2UEW-F) or equivalent	DONG GUAN YI DA INDUSTRIAL CO.,LTD	E344055
3	Solder	Sn99.3-Cu0.7 or equivalent	HuiZhou Chang Sheng METAL PRODUCTS CO.,LTD	
4	Tube	UL Φ 5mm(BLACK) RSFR-H or equivalent	SHENZHEN WOER HEAT-SHRINKABLE MATERIAL CO.,LTD	E203950
		UL Φ 5mm(BLACK) X-2 or equivalent	SHENZHEN XINGQI PLASTIC PRODUCE CO.,LTD	E350991
5	Epoxy	J-600 or equivalent	SHENZHEN CENKER ENTERPRISE LTD.	
6	Pin	CP Φ0.55×17.5mm or equivalent	SHENZHEN CENKER ENTERPRISE LTD.	



深圳市岑科实业有限公司  
 SHEN ZHEN CENKER ENTERPRISE LTD.  
 TEL:0755-89808755 FAX:0755-27525256

PREPARED	CHECKED	APPROVED
覃玉云	韦秀华	梁秀勇

# SPECIFICATION FOR APPROVAL

**RoHS COMPLIANT**

PAGE:3/6

CUSTOMER	8826	LOT No.			
CUSTOMER No.	S16100116	QUANTITY	5PCS	DATE	2020/7/2
DRAWING No.	SP-CK112-00038028	DIMENSION(UNIT: mm)			
CENKER P/N	CKPP0507-10uH/M-U3.5				
DESCRIPTION	RADIAL TYPE CHOKE INDUCTOR				
TEST FREQ	100kHz/5mA				
TEMPERATURE	25 °C				

## 5. TESTING DATA:

ELECTRONICAL TEST DATA					OREALL DIMENSTON (UNIT: mm)								
	L	DCR	IDC 2.6A	SRF	A	B	C	D	E	F			
SPEC	10μH ±20%	80mΩ Max.	L0A×90 % Ref.	16MHz TYP	Φ 6.5Max	8.5 Max	3.5±0.5	2.5±0.5	Φ0.5 Ref	3.0Max			
1	10.19	51.2	9.70	16.68	5.76	7.61	3.62	2.46	0.55	1.96			
2	10.12	52.6	9.59	16.32	5.64	7.59	3.59	2.50	0.56	1.75			
3	10.01	51.8	9.54	16.35	5.69	7.65	3.52	2.47	0.55	2.06			
4	10.18	51.6	9.68	16.36	5.77	7.62	3.54	2.52	0.56	1.58			
5	10.12	52.0	9.61	16.35	5.72	7.58	3.55	2.50	0.55	1.97			
6	10.15	51.2	9.66	16.34	5.76	7.61	3.62	2.46	0.55	1.76			
7	10.12	52.3	9.59	16.36	5.64	7.58	3.52	2.54	0.56	1.74			
8	10.08	51.5	9.61	16.35	5.62	7.62	3.55	2.47	0.55	1.95			
9	10.12	51.6	9.62	16.35	5.75	7.62	3.54	2.52	0.56	2.03			
10	10.12	52.1	9.61	16.32	5.72	7.58	3.55	2.50	0.55	1.95			
$\bar{X}$	10.12	51.79	9.62	16.38	5.71	7.61	3.56	2.49	0.55	1.88			
R	0.18	1.4	0.16	0.36	0.15	0.07	0.10	0.08	0.01	0.48			

## TEST EQUIPMENT:

ALL JUDGE

OK  NG

L CH-1062A HP-4284A

Q HM2801A HM9481 CJ2851

DCR Keysight 34420A

SRF HM9460

IDC CD1068+CD1320 HP-4284A+HP-42841A



深圳市岑科实业有限公司

SHEN ZHEN CENKER ENTERPRISE LTD.

TEL:0755-89808755 FAX:0755-27525256

PREPARED

覃玉云

CHECKED

韦秀华

APPROVED

梁秀勇

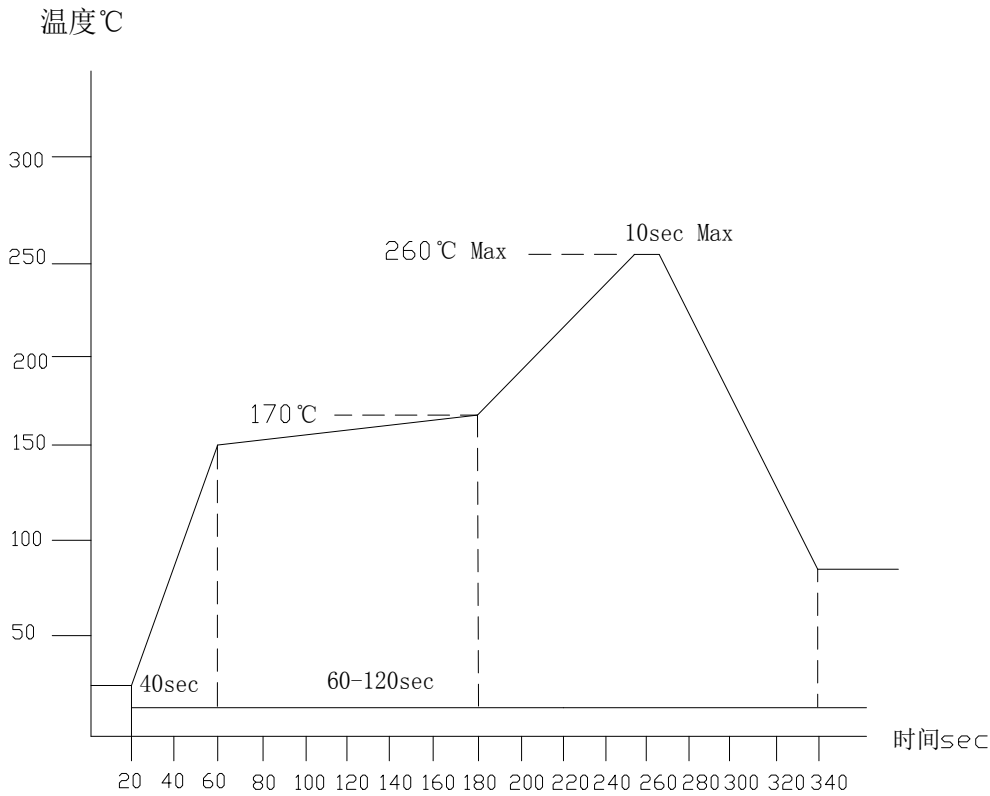
## 6.Radial Type Inductor's Reliability Testing Items

GENERAL CHARACTERISTICS				PAGE: 4/6	
STANDARD TESTING CONDITIONS:					
UNLESS OTHERWISE SPECIFIED, THE STANDARD RANGE OF ATMOSPHERIC CONDITIONS FOR MEASUREMENTS AND TESTS ARE AS FOLLOWS: AMBIENT TEMPERATURE: 15°C ~ 35°C. RELATIVE HUMIDITY: 25% ~ 85%. AIR PRESSURE: 86kPa ~ 106kPa.					
NO.	Items	Test Methods	Requirements	Version	
1	High temperature storage test	Temperature : 105°C ± 2°C Duration Time: 96 ± 4 Hours	No significant abnormality in appearance. Deviation relative to initial value: L: Within ± 5%	A3	
2	Low temperature storage test	Temperature : -25°C ± 2°C Duration Time: 96 ± 4 Hours		10	
3	Humidity test	Temperature : 40°C ± 2°C Humidity : 90% ~ 95%RH Duration Time : 96 ± 4 Hours		10	
4	Thermal shock test	First -25 ± 5°C for 30 ± 3 minutes, last 85 ± 5°C 30 ± 3 minutes as 1 cycles. Go through 10 cycles.		10	
5	Resistance to soldering heat test	Fix the samples on a 1.6mm thickness PCB, then dip the sample leads into a soldering bath of 260 ± 5°C up to the PCB for 5 ± 1 seconds.		10	
6	Temperature cycling test	Temperature: -10 ± 3°C for 30 minutes; Temperature: 25°C for 10 minutes; Temperature: 70 ± 3°C for 30 minutes; Temperature: 25°C for 10 minutes; Total: 5 cycles.		10	
7	Vibration test	The frequency range from 10 to 55 Hz and return to 10 Hz (amplitude of 1.5 mm) shall be traversed in approximately 1 minute. This motion shall be applied of 2 hours in each 3 mutually perpendicular directions (total of 6 hours).		10	
8	Lead terminal strength	A static pulling force of 5N in a direction parallel to the lead terminals for 30 ± 5 seconds.		No terminal breakage or loosening.	10
9	Solder ability test	Immerse the terminal in flux for 5 seconds. Then dip the terminal into a soldering bath of 245 ± 5°C for 2.5 ± 0.5 seconds.		At least 75% of terminal electrode is covered by new solder.	10

CUSTOMER	8826	CUSTOMER No.	S16100116	PAGE
CENKER P/N	CKPP0507-10uH/M-U3.5	DRAWING No.	SP-CK112-00038028	5/6
ISSUE DATE	2020/7/2	VERSION	A3	

7

**Flow (wave) soldering curve**



深圳市岑科实业有限公司  
 SHEN ZHEN CENKER ENTERPRISE LTD.  
 TEL:0755-89808755 FAX:0755-27525256





PREPARED	CHECKED	APPROVED
覃玉云	韦秀华	梁秀勇

# SPECIFICATION FOR APPROVAL

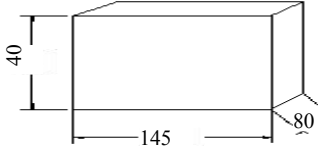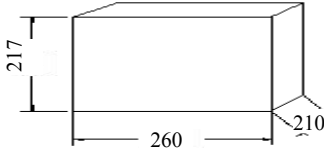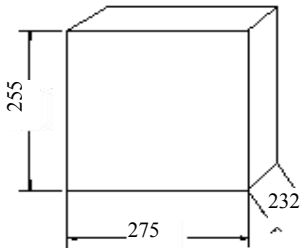**RoHS COMPLIANT**

CUSTOMER	8826	CUSTOMER No.	S16100116	PAGE
CENKER P/N	CKPP0507-10uH/M-U3.5	DRAWING No.	SP-CK112-00038028	6/6
ISSUE DATE	2020/7/2	VERSION	A3	

## 8、PACKING(mm):

1. PE BAG: 160*115mm ( 400PCS/BAG );	
2. Inside the box size: 145*80*40mm ( Loading 1PE BAG ,Quantity 400PCS )	
2. Inside the box size: 260*210*217mm ( Loading 15 Box ,Quantity 6KPCS )	
3. Outer box:275*232*255mm ( Loading 1 Inside the box ,Quantity 6K/PCS )	



深圳市岑科实业有限公司  
 SHEN ZHEN CENKER ENTERPRISE LTD.  
 TEL:0755-89808755 FAX:0755-27525256

PREPARED	CHECKED	APPROVED
覃玉云	韦秀华	梁秀勇



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Fixed Inductors](#) category:*

*Click to view products by [CENKER](#) manufacturer:*

Other Similar products are found below :

[CR32NP-100KC](#) [CR54NP-470LC](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHQ1005P10NJ](#) [MHQ1005P1N0S](#) [MHQ1005P2N4S](#) [MHQ1005P3N6S](#)  
[MHQ1005P5N1S](#) [MHQ1005P8N2J](#) [PE-53601NL](#) [PE-53602NL](#) [PG0936.113NLT](#) [9220-20](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#)  
[1206CS-471XJ](#) [HC2-R47-R](#) [HC8-1R2-R](#) [HCF1305-3R3-R](#) [1206CS-151XG](#) [RCH664NP-140L](#) [RCH664NP-4R7M](#) [RCP1317NP-391L](#)  
[RCR110DNP-331L](#) [DH2280-4R7M](#) [DS1608C-106](#) [B10TJ](#) [B82498B3101J000](#) [ELJ-RE27NJF2](#) [1812CS-153XJ](#) [1812CS-183XJ](#) [1812CS-](#)  
[223XJ](#) [1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#) [1812LS-224XJ](#) [1812LS-563XJ](#) [1812LS-683XJ](#)  
[1812LS-824XJ](#) [NIN-FB101JTR110F](#) [NIN-FB471JTR62F](#) [NIN-FC1R5JTR220F](#) [NIN-HCR15JTRF](#) [NIN-HCR33JTRF](#) [NIN-HDR22JTRF](#)