

BRX44 BRX47
BRX45 BRX48
BRX46 BRX49

**SILICON CONTROLLED RECTIFIER
0.8 AMP, 30 THRU 400 VOLTS**



TO-92 CASE

CentralTM
Semiconductor Corp.

DESCRIPTION:

The CENTRAL SEMICONDUCTOR BRX44 series types are PNP Silicon Controlled Rectifiers manufactured in a TO-92 case, designed for control systems and sensing circuit applications.

MARKING CODE: FULL PART NUMBER

MAXIMUM RATINGS: ($T_A=25^\circ\text{C}$ unless otherwise noted)

| | SYMBOL | BRX44 | BRX45 | BRX46 | BRX47 | BRX48 | BRX49 | UNITS |
|--|--------------------|-------|-------|-------|-------------|-------|-------|--------------------|
| Peak Repetitive Off-State Voltage | V_{DRM}, V_{RRM} | 30 | 60 | 100 | 200 | 300 | 400 | V |
| RMS On-State Current ($T_C=40^\circ\text{C}$) | $I_T(\text{RMS})$ | | | | 0.8 | | | A |
| Average On-State Current ($T_C=40^\circ\text{C}$) | $I_T(\text{AV})$ | | | | 0.5 | | | A |
| Nonrept. On-State Current ($T_C=60^\circ\text{C}$) | I_{TSM} | | | | 10 | | | A |
| Fusing Current ($t=10\text{ms}$) | I^2t | | | | 0.24 | | | A ² s |
| Peak Reverse Gate Voltage ($I_{GR}=10\mu\text{A}$) | V_{GRM} | | | | 8.0 | | | V |
| Peak Gate Current ($t=10\mu\text{s}$) | I_{GM} | | | | 1.0 | | | A |
| Peak Gate Dissipation ($t=10\mu\text{s}$) | P_{GM} | | | | 2.0 | | | W |
| Gate Dissipation ($t=20\text{ms}$) | $P_G(\text{AV})$ | | | | 0.1 | | | W |
| Operating and Storage | | | | | | | | |
| Junction Temperature | T_J, T_{stg} | | | | -40 to +125 | | | $^\circ\text{C}$ |
| Thermal Resistance | θ_{JC} | | | | 100 | | | $^\circ\text{C/W}$ |
| Thermal Resistance | θ_{JA} | | | | 200 | | | $^\circ\text{C/W}$ |


ELECTRICAL CHARACTERISTICS: ($T_A=25^\circ\text{C}$ unless otherwise noted)

| SYMBOL | TEST CONDITIONS | MIN | MAX | UNITS |
|--------------------|--|-----|-----|------------------|
| I_{DRM}, I_{RRM} | Rated $V_{DRM}, V_{RRM}, R_{GK}=1.0\text{K}\Omega, T_C=25^\circ\text{C}$ | | 1.0 | μA |
| I_{DRM}, I_{RRM} | Rated $V_{DRM}, V_{RRM}, R_{GK}=1.0\text{K}\Omega, T_C=125^\circ\text{C}$ | | 0.1 | mA |
| V_{TM} | $I_T=1.0\text{A}$ | | 1.7 | V |
| I_{GT} | $V_D=6.0\text{V}, R_L=10\Omega$ | | 200 | μA |
| V_{GT} | $V_D=6.0\text{V}, R_L=10\Omega$ | | 0.8 | V |
| I_H | $R_{GK}=1.0\text{K}\Omega$ | | 5.0 | mA |
| I_L | $R_{GK}=1.0\text{K}\Omega$ | | 6.0 | mA |
| dv/dt | $V_D=0.67\text{V} \times V_{DRM}, R_{GK}=1.0\text{K}\Omega, T_C=125^\circ\text{C}$ | 100 | | V/ μs |
| di/dt | $I_G=10\text{mA}, di_G/dt=0.1\text{A}/\mu\text{s}, T_C=125^\circ\text{C}$ | 30 | | A/ μs |

R0 (27-April 2004)

**SILICON CONTROLLED RECTIFIER
0.8 AMP, 30 THRU 400 VOLTS**

TO-92 CASE - MECHANICAL OUTLINE

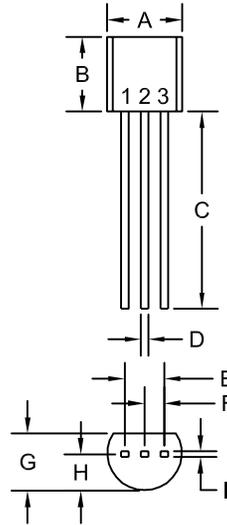

R1

LEAD CODE:

- 1) ANODE
- 2) GATE
- 3) CATHODE

MARKING CODE:

FULL PART NUMBER

| SYMBOL | INCHES | | MILLIMETERS | |
|---------|--------|-------|-------------|------|
| | MIN | MAX | MIN | MAX |
| A (DIA) | 0.175 | 0.205 | 4.45 | 5.21 |
| B | 0.170 | 0.210 | 4.32 | 5.33 |
| C | 0.500 | - | 12.70 | - |
| D | 0.016 | 0.022 | 0.41 | 0.56 |
| E | 0.100 | | 2.54 | |
| F | 0.050 | | 1.27 | |
| G | 0.125 | 0.165 | 3.18 | 4.19 |
| H | 0.080 | 0.105 | 2.03 | 2.67 |
| I | 0.015 | | 0.38 | |

TO-92 (REV: R1)



OUTSTANDING SUPPORT AND SUPERIOR SERVICES

PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2nd day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

REQUESTING PRODUCT PLATING

1. If requesting Tin/Lead plated devices, add the suffix "TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
2. If requesting Lead (Pb) Free plated devices, add the suffix "PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

CONTACT US

Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.
145 Adams Avenue
Hauppauge, NY 11788 USA
Main Tel: (631) 435-1110
Main Fax: (631) 435-1824
Support Team Fax: (631) 435-3388
www.centrasemi.com

Worldwide Field Representatives:
www.centrasemi.com/wwreps

Worldwide Distributors:
www.centrasemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: www.centrasemi.com/terms

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [SCRs category](#):

Click to view products by [Central Semiconductor manufacturer](#):

Other Similar products are found below :

[NTE5428](#) [T1500N16TOF VT](#) [T720N18TOF](#) [T880N16TOF](#) [TT162N16KOF-A](#) [TT330N16AOF](#) [VS-16RIA100](#) [VS-22RIA20](#) [VS-2N685](#)
[057219R](#) [T1190N16TOF VT](#) [T1220N22TOF VT](#) [T201N70TOH](#) [T830N14TOF](#) [TT250N12KOF-K](#) [VS-110RKI40](#) [NTE5427](#) [T2160N28TOF](#)
[VT](#) [VS-22RIA100](#) [VS-16RIA40](#) [VS-ST110S16P0](#) [T2160N24TOF VT](#) [T1190N18TOF VT](#) [T1590N28TOF VT](#) [2N1776A](#) [T590N14TOF](#)
[NTE5375](#) [NTE5460](#) [NTE5481](#) [NTE5504](#) [NTE5512](#) [NTE5514](#) [NTE5518](#) [NTE5519](#) [NTE5529](#) [NTE5553](#) [NTE5555](#) [NTE5557](#) [NTE5567](#)
[NTE5570](#) [NTE5572](#) [NTE5574](#) [NTE5576](#) [NTE5579](#) [NTE5589](#) [NTE5592](#) [NTE5598](#) [NTE6418](#) [T690N06TOF](#) [VS-22RIA80](#)